

## GRF2583

### LNA with Selectable Gain

### 4.4 to 6 GHz

PRELIMINARY DATA SHEET

#### FEATURES

- Two Selectable Gain Modes: 27.2 & 15 dB
- 2.7 to 6 V Supply Voltage
- Flexible Biasing Provides Latitude for Linearity Optimization
- 52 mA Native Mode Quiescent Current Consumption
- 50  $\Omega$  Single-Ended Input and Output Impedances
- RoHS Compliant

#### Reference: High Gain Mode 5 V / 52 mA / 5.9 GHz

- Gain: 27.2 dB
- OP1dB: 16 dBm
- OIP3: 33 dBm
- Evaluation Board NF: 1.2 dB

#### Reference: Low Gain Mode 5 V / 15 mA / 5.9 GHz

- Gain: 15 dB
- OP1dB: 10 dBm
- OIP3: 21.2 dBm
- Evaluation Board NF: 1.25 dB

#### APPLICATIONS

- Automotive V2X Band
- n47 Front Ends and Compensators
- High-Performance RF Infrastructure


#### DESCRIPTION


The GRF2583 is a two-stage GaAs pHEMT low noise amplifier targeting high-performance wireless infrastructure applications. The second stage can be bypassed with an independent control pin, thus allowing the device to support high and low gain modes of 27.2 and 15.2 dB, respectively.

For optimal efficiency and linearity, the amplifier was designed to operate with a single 5 V supply voltage while using only 52 mA of quiescent current. Supply voltages ranging from 2.7 to 6 volts are also supported. Similarly, quiescent current can be increased beyond the native biasing point for enhanced linearity performance.

Additional tunes can be found on the GRF2583 “Custom Tunes” product page: [GRF2583 Custom Tunes](#)

#### BLOCK DIAGRAM

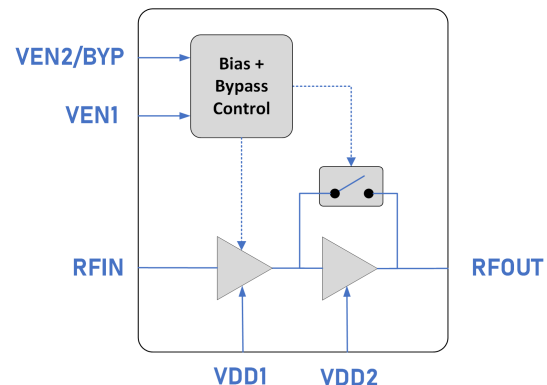

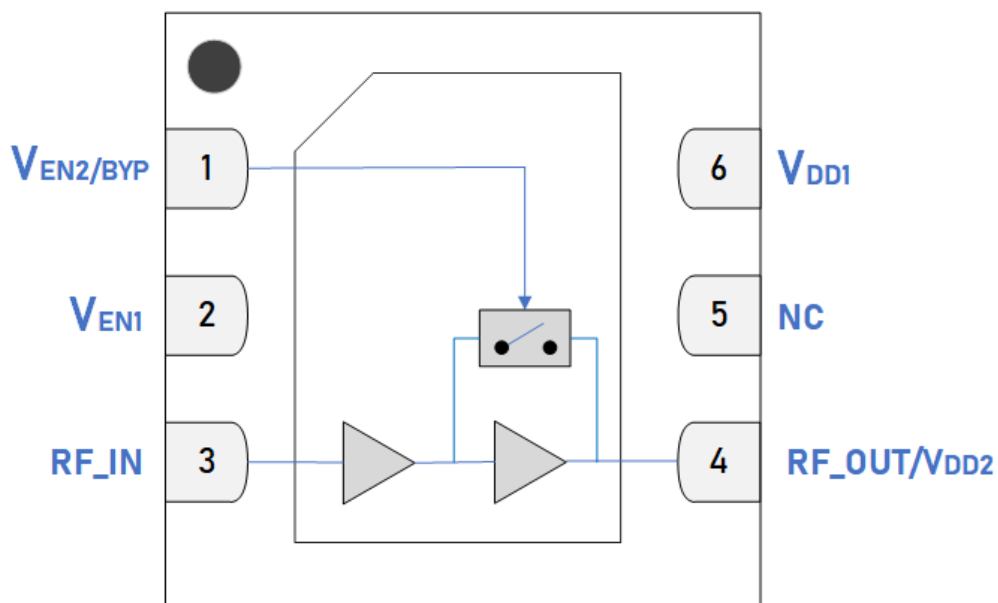

Pin Out (Top View)

## Pin Assignments

Pin	Name	Description	Note
1	V <sub>EN2/BYP</sub>	2nd Stage Enable/Bypass	V <sub>EN2/BYP</sub> ≤ 0.2 volts sets Bypass Mode. V <sub>EN2/BYP</sub> and external series resistor controls the second stage I <sub>DDQ</sub> when V <sub>EN2/BYP</sub> is high.
2	V <sub>EN1</sub>	1st Stage Enable	V <sub>EN1</sub> ≤ 0.2 disables the first stage. V <sub>EN1</sub> and external series resistor control the first stage I <sub>DDQ</sub> when V <sub>EN1</sub> is high.
3	RF_IN	RF Input	Internally matched 50 Ω. An external DC blocking cap must be used.
4	RF_OUT/V <sub>DD2</sub>	RF Output/2nd Stage Bias	Internally matched 50 Ω. V <sub>DD</sub> must be applied through a choke to this pin.
5	NC	No Connect	No internal connection. This pin can be left unconnected, or be connected to the ground (recommended). Use a via as close to the pin as possible if grounded.
6	V <sub>DD1</sub>	1st Stage Bias	Pull up to V <sub>DD</sub> through the inductor and use bypass capacitors as close to the pin as possible. In addition to supplying the first stage of the device with a DC voltage, there is also an RF signal present.
PKG BASE	GND	Ground	Provides DC and RF ground for amplifiers, as well as thermal heat sink. In order to match the device's rated performance, it is strongly recommended to use multiple 8mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

## Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	$V_{DD}$	0	6	V
RF Input Power: Load VSWR < 2:1, $V_{DD}$ < 6 V	$P_{IN\ MAX}$		22	dBm
Operating Temperature (Package Base)	$T_{PKG\ BASE}$	-40	115	°C
Maximum Channel Temperature (MTTF > 10 <sup>6</sup> Hours)	$T_{MAX}$		170	°C
Maximum Dissipated Power	$P_{DISS\ MAX}$		TBD	W
<b>Electrostatic Discharge</b>				
Human Body Model	HBM	TBD		V
<b>Storage</b>				
Storage Temperature	$T_{STG}$	-65	150	°C
Moisture Sensitivity Level			1	--



**Caution! ESD Sensitive Device.**

**Exceeding Absolute Maximum Rating conditions may cause permanent damage.**

Note: For additional information, please refer to [Manufacturing Note MN-001 - Packaging and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging. For additional information, please refer to the [Certificate of RoHS Compliance](#).

## Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	$V_{DD}$	2.7	5	5.25	V	
Operating Temperature Range	$T_{PKG\ BASE}$	-40		+115	°C	
RF Frequency Range	$F_{RF}$	5.8	5.9	6	GHz	5.9 GHz tuning set ( <b>note 1 &amp; 2</b> ).
RF_IN Port Impedance	$Z_{RFIN}$		50		$\Omega$	Single ended, with respective matching elements from each tuning set.
RF_OUT Port Impedance	$Z_{RFOUT}$		50		$\Omega$	Single ended, with respective matching elements from each tuning set.

**Note 1:** Operation outside of this range is supported by using different custom tunes. Examples of other optimized tunes can be found here: [GRF2583 Custom Tunes](#)

**Note 2:** Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

## Nominal Operating Parameters - General

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
$V_{EN1}$ , $V_{EN2}$ Input Voltage Logic Levels	$V_{IL}$	0		0.2	V	Applies to $V_{EN1}$ and $V_{EN2/BYP}$ inputs.
	$V_{IH}$	1.5		$V_{DD}$	V	Applies to $V_{EN1}$ and $V_{EN2/BYP}$ inputs.
$V_{EN1}$ Input Logic Current	$I_{IH-EN1}$		0.86		mA	$V_{EN1} = 5$ V (Logic HIGH). $V_{EN2/BYP} = 5$ V (Logic HIGH).
	$I_{IL-EN1}$		0.85		mA	$V_{EN1} = 0$ V (Logic LOW). $V_{EN2/BYP} = 0$ V (Logic LOW).
$V_{EN2}$ Input Logic Current	$I_{IH-EN2}$		1.65		mA	$V_{EN1} = 5$ V (Logic HIGH). $V_{EN2/BYP} = 5$ V (Logic HIGH).
	$I_{IL-EN2}$		0		mA	$V_{EN1} = 5$ V (Logic HIGH). $V_{EN2/BYP} = 0$ V (Logic LOW).
			0		mA	$V_{EN1} = 0$ V (Logic LOW). $V_{EN2/BYP} = 0$ V (Logic LOW).
$V_{EN1}$ Switching Rise Time	$t_{VEN1-RISE}$		50		ns	Turn ON time ( $V_{EN1}$ Low to High, <b>note 3</b> ).
$V_{EN1}$ Switching Fall Time	$t_{VEN1-FALL}$		50		ns	Turn OFF time ( $V_{EN1}$ High to Low, <b>note 4</b> ).
$V_{EN2/BYP}$ Switching Rise Time	$t_{GAIN-RISE}$		50		ns	Low to High gain mode switching ( $V_{EN2/BYP}$ Low to High, <b>note 5</b> ).
$V_{EN2/BYP}$ Switching Fall Time	$t_{GAIN-FALL}$		50		ns	High to Low gain mode switching ( $V_{EN2/BYP}$ High to Low, <b>note 6</b> ).

## Nominal Operating Parameters - General (continued)

### Disabled Mode

Standby Current	$I_{STBY}$		675		$\mu A$	$V_{DD} = 5 V, V_{EN1} = Low, V_{EN2/BYP} = Low.$
-----------------	------------	--	-----	--	---------	---

### Thermal Data

Thermal Resistance (Infrared Scan)	$\theta_{JC}$		TBD		$^{\circ}C/W$	On Standard Evaluation Board.
Channel Temp @ +115 $^{\circ}C$ (Reference Package Heat Sink)	$T_{CHANNEL}$		TBD		$^{\circ}C$	$V_{DD} = 5 V, I_{DDQ} = 66 mA, P_{DISS} = TBD.$ No RF applied <b>(note 7)</b> .

**Note 3:** Switching Rise Time: 50% of  $V_{EN1}$  to 90% of  $P_{OUT}$ .

**Note 4:** Switching Fall Time: 50% of  $V_{EN1}$  to 10% of  $P_{OUT}$ .

**Note 5:** Switching Rise Time: 50% of  $V_{EN2/BYP}$  to 90% of  $P_{OUT}$ .

**Note 6:** Switching Fall Time: 50% of  $V_{EN2/BYP}$  to 10% of  $P_{OUT}$ .

**Note 7:** MTTF >  $10^6$  hours for  $T_{CHANNEL} < 170^{\circ}C$ .

## Nominal Operating Parameters - RF

### 5.9 GHz, 5 V Supply, High Gain Configuration

The following conditions apply unless noted otherwise: typical application schematic using the 5.9 GHz tuning set,  $V_{EN1} = 5$  V,  $V_{EN2/BYP} = 5$  V (high gain mode),  $R_{BIAS1} = 4.75$  k $\Omega$ ,  $R_{BIAS2} = 2$  k $\Omega$  (low bias mode), 50  $\Omega$  system impedance,  $V_{DD} = 5$  V,  $P_{OUT} = 0$  dBm,  $F_{TEST} = 5.9$  GHz,  $T_{PKG\ BASE} = 25$  °C. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current (High Bias Mode)	$I_{DDQ-HIGH}$		TBD		mA	$R_{BIAS} = TBD, R_{BIAS2} = TBD$
Supply Quiescent Current (Low Bias Mode)	$I_{DDQ-LOW}$		52			$R_{BIAS} = 4.75$ k $\Omega$ , $R_{BIAS2} = 2$ k $\Omega$
Supply Current with RF applied (High Bias Mode)	$I_{DD-HIGH}$		TBD		mA	$P_{OUT} = 0$ dBm, $R_{BIAS} = TBD$ , $R_{BIAS2} = TBD$
Supply Current with RF applied (Low Bias Mode)	$I_{DD-LOW}$		52			$P_{OUT} = 0$ dBm, $R_{BIAS} = 4.75$ k $\Omega$ , $R_{BIAS2} = 2$ k $\Omega$
Gain	$S_{21}$		27.2		dB	$F_{RF} = 5.9$ GHz
Gain Flatness	$S_{21_{FLAT}}$		1.3		dB	$F_{RF} = 5.8$ to 6 GHz
Gain Variation Over Temp	$S_{21_{TEMP}}$		2.5		dB	$T_{PKG\ BASE} = -40$ to 115 °C, Referenced to $T_{PKG\ BASE} = 25$ °C
Standby Mode Gain	$S_{21_{STBY}}$		TBD		dB	$V_{EN1} = V_{EN2/BYP} = 0$ V
Input Return Loss	$S_{11}$		< -10		dB	$F_{RF} = 5.9$ GHz
Output Return Loss	$S_{22}$		< -10		dB	$F_{RF} = 5.9$ GHz
Reverse Isolation	$S_{12}$		< -28		dB	$F_{RF} = 5.9$ GHz
De-Embedded Noise Figure	NF		TBD		dB	$F_{RF} = 5.9$ GHz
Evaluation Board Noise Figure			1.2			$F_{RF} = 5.9$ GHz
Output 3rd Order Intercept Point	$OIP3_{HI\ BIAS}$		TBD		dBm	$I_{DDQ} = TBD$ , 0 dBm $P_{OUT}$ per tone at 2 MHz spacing
	$OIP3_{LO\ BIAS}$		33			$I_{DDQ} = 52$ mA, 0 dBm $P_{OUT}$ per tone at 2 MHz spacing
Output 1 dB Compression Power	$OP1dB_{HI\ BIAS}$		TBD		dBm	$I_{DDQ} = TBD$
	$OP1dB_{LO\ BIAS}$		16			$I_{DDQ} = 52$ mA



## Nominal Operating Parameters - RF

### 5.9 GHz, 5 V Supply, Low Gain Configuration

The following conditions apply unless noted otherwise: typical application schematic using the 5.9 GHz tuning set,  $V_{EN1} = 5$  V,  $V_{EN2/BYP} = 0$  V (low gain mode),  $R_{BIAS1} = 4.75$  k $\Omega$ ,  $R_{BIAS2} = 2$  k $\Omega$  (low bias mode), 50  $\Omega$  system impedance,  $V_{DD} = 5$  V,  $P_{OUT} = 0$  dBm,  $F_{TEST} = 5.9$  GHz,  $T_{PKG\ BASE} = 25$  °C. Evaluation board losses are included within the specifications.


Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current (High Bias Mode)	$I_{DDQ-HIGH}$		TBD		mA	$R_{BIAS} = TBD$ , $R_{BIAS2} = TBD$
Supply Quiescent Current (Low Bias Mode)	$I_{DDQ-LOW}$		15			$R_{BIAS} = 4.75$ k $\Omega$ , $R_{BIAS2} = 2$ k $\Omega$
Supply Current with RF applied (High Bias Mode)	$I_{DD-HIGH}$		TBD		mA	$P_{OUT} = 0$ dBm, $R_{BIAS} = TBD$ , $R_{BIAS2} = TBD$
Supply Current with RF applied (Low Bias Mode)	$I_{DD-LOW}$		16			$P_{OUT} = 0$ dBm, $R_{BIAS} = 4.75$ k $\Omega$ , $R_{BIAS2} = 2$ k $\Omega$
Gain	$S_{21}$		15		dB	$F_{RF} = 5.9$ GHz
Gain Flatness	$S_{21_{FLAT}}$		0.5		dB	$F_{RF} = 5.8$ to 6 GHz
Gain Variation Over Temp	$S_{21_{TEMP}}$		2.2		dB	$T_{PKG\ BASE} = -40$ to 115 °C, Referenced to $T_{PKG\ BASE} = 25$ °C
Standby Mode Gain	$S_{21_{STBY}}$		TBD		dB	$V_{EN1} = V_{EN2/BYP} = 0$ V
Input Return Loss	$S_{11}$		< -9		dB	$F_{RF} = 5.9$ GHz
Output Return Loss	$S_{22}$		< -9		dB	$F_{RF} = 5.9$ GHz
Reverse Isolation	$S_{12}$		< -28		dB	$F_{RF} = 5.9$ GHz
De-Embedded Noise Figure	NF		TBD		dB	$F_{RF} = 5.9$ GHz
Evaluation Board Noise Figure			1.25			$F_{RF} = 5.9$ GHz
Output 3rd Order Intercept Point	$OIP3_{HI\ BIAS}$		TBD		dBm	$I_{DDQ} = TBD$ , 0 dBm $P_{OUT}$ per tone at 2 MHz spacing
	$OIP3_{LO\ BIAS}$		21.2			$I_{DDQ} = 15$ mA, 0 dBm $P_{OUT}$ per tone at 2 MHz spacing
Output 1 dB Compression Power	$OP1dB_{HI\ BIAS}$		TBD		dBm	$I_{DDQ} = TBD$
	$OP1dB_{LO\ BIAS}$		10			$I_{DDQ} = 15$ mA

**TRUTH TABLE**


Mode	Pin Logic	
	$V_{EN1}$	$V_{EN2/BYP}$
High Gain	HIGH	HIGH
Low Gain (2nd Stage Bypass)	HIGH	LOW
Standby	LOW	LOW

## GRF2583 Typical Operating Curves

GRF2583 Gain vs Frequency at Ven2(V) = 5 V and Pin = -25 dBm

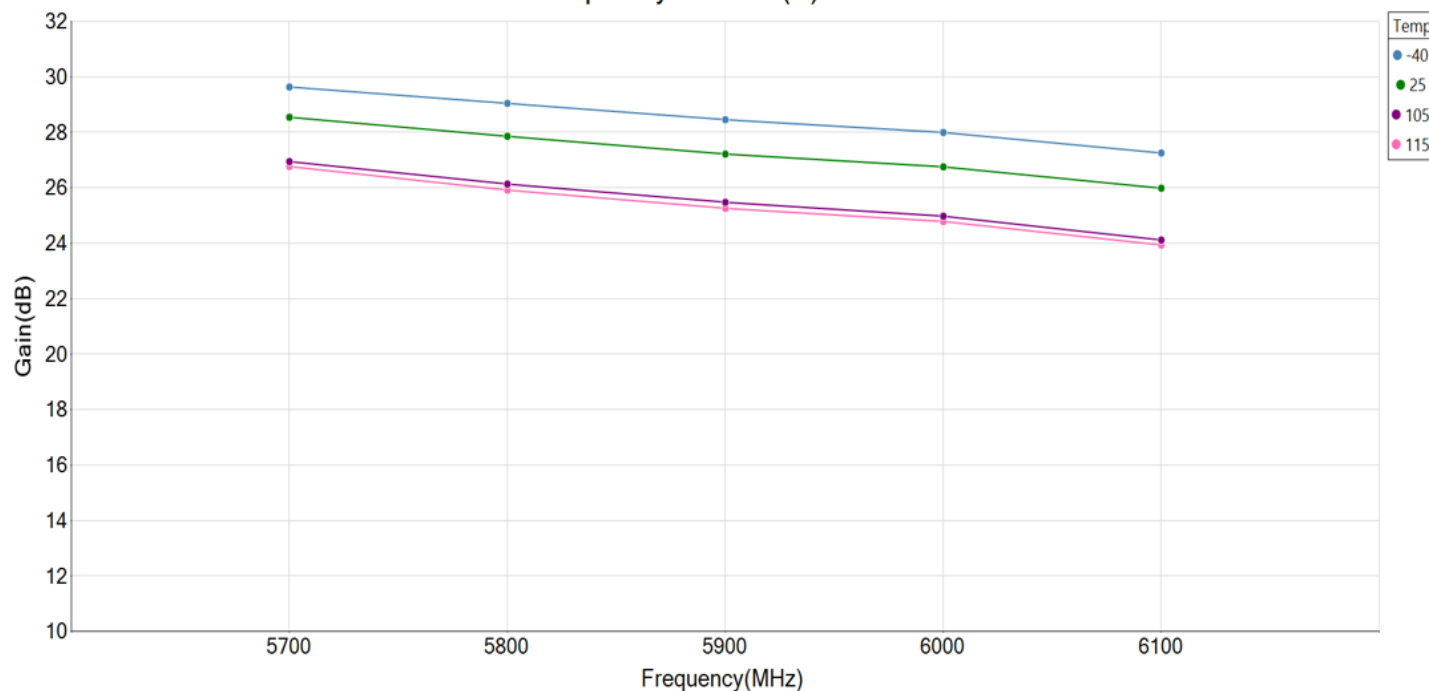


GRF2583 Gain vs Frequency at Ven2(V) = 0 V and Pin = -20 dBm

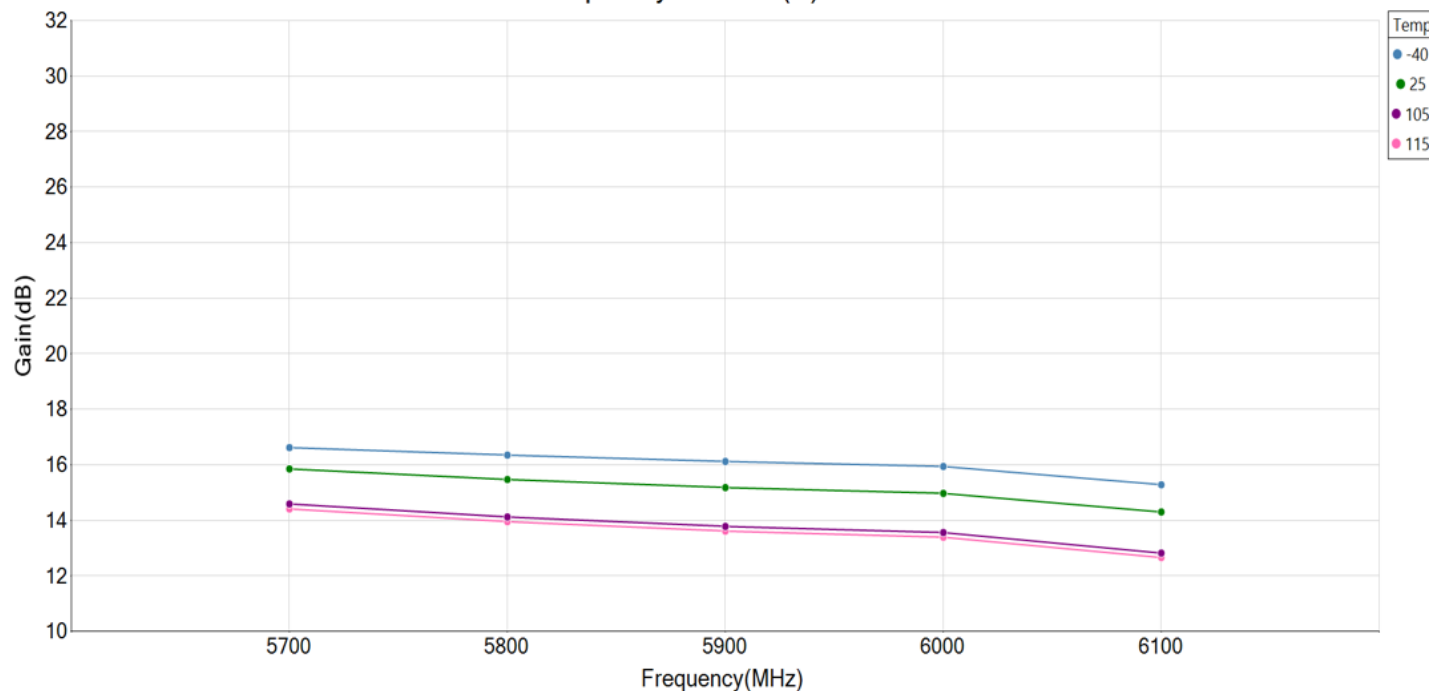


## GRF2583 Typical Operating Curves

GRF2583 Noise Figure vs Frequency at Ven2(V) = 5 V

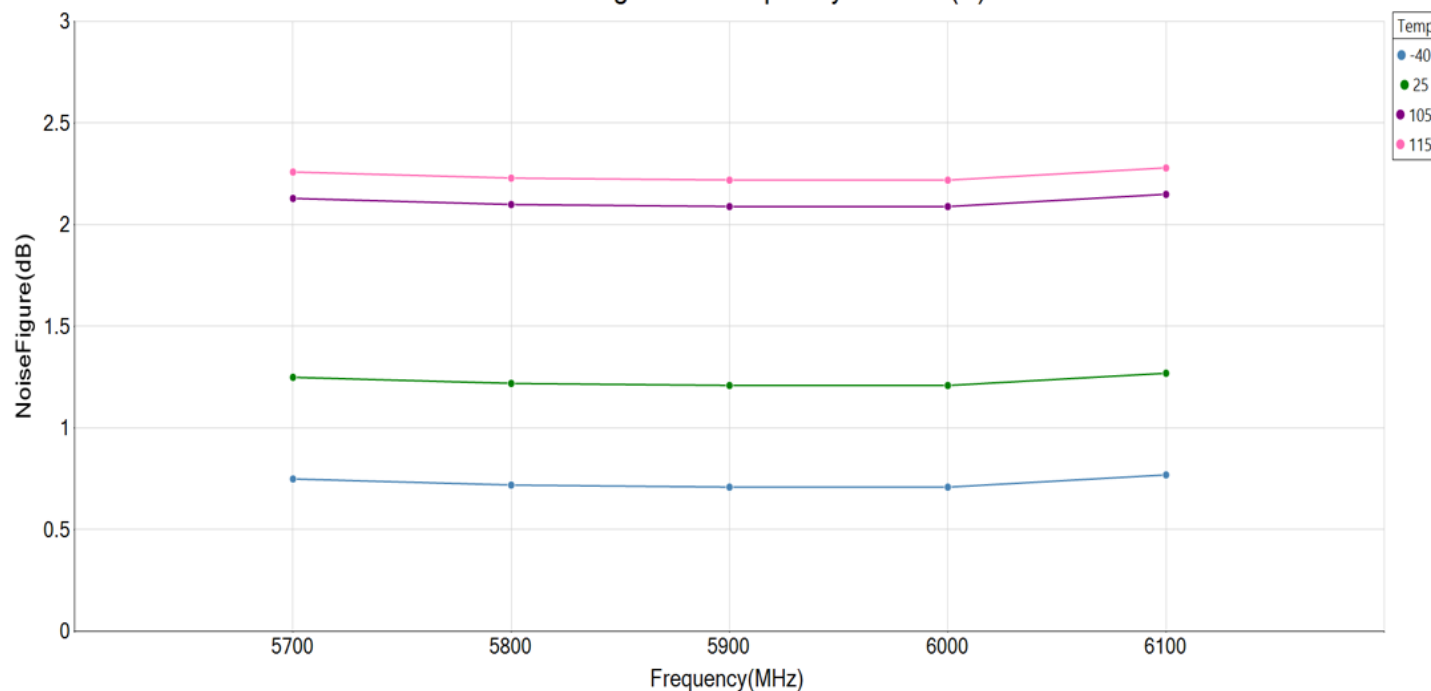


GRF2583 Noise Figure vs Frequency at Ven2(V) = 0 V

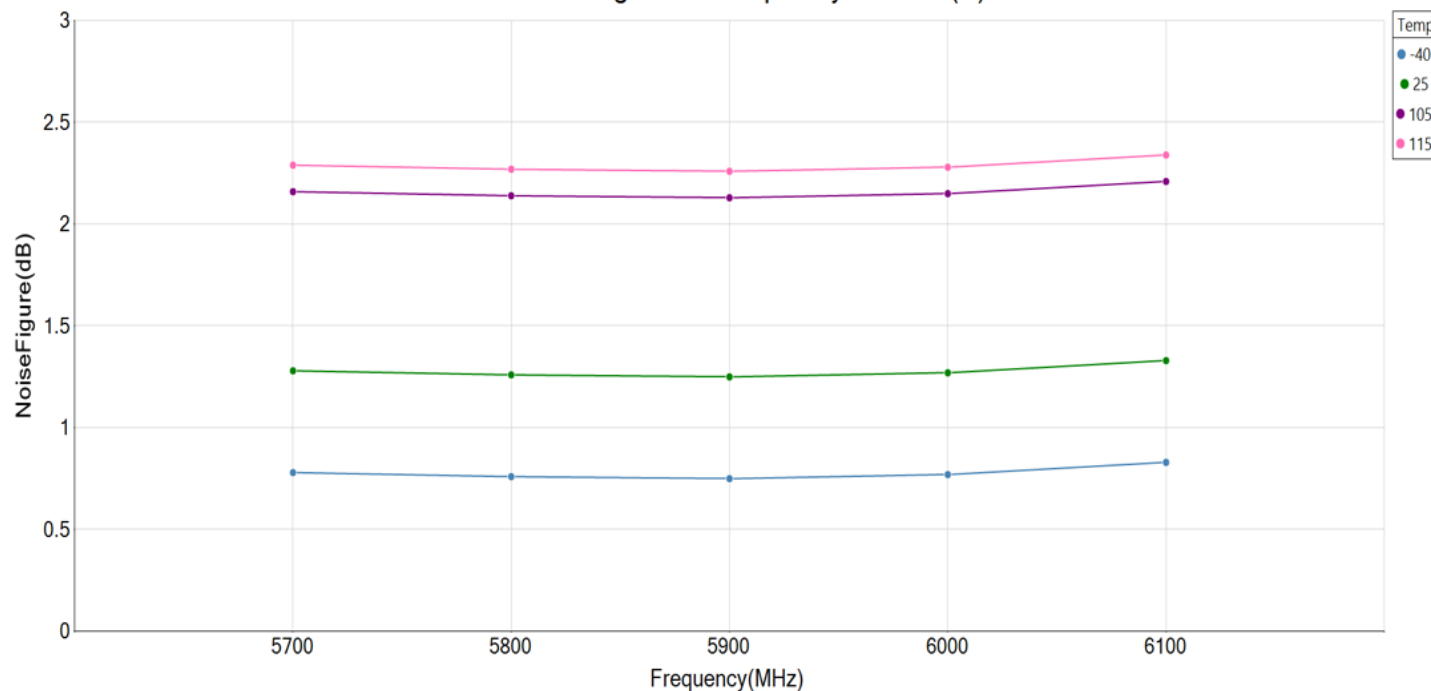


## GRF2583 Typical Operating Curves


GRF2583 OP1dB vs Frequency at Ven2(V) = 5 V

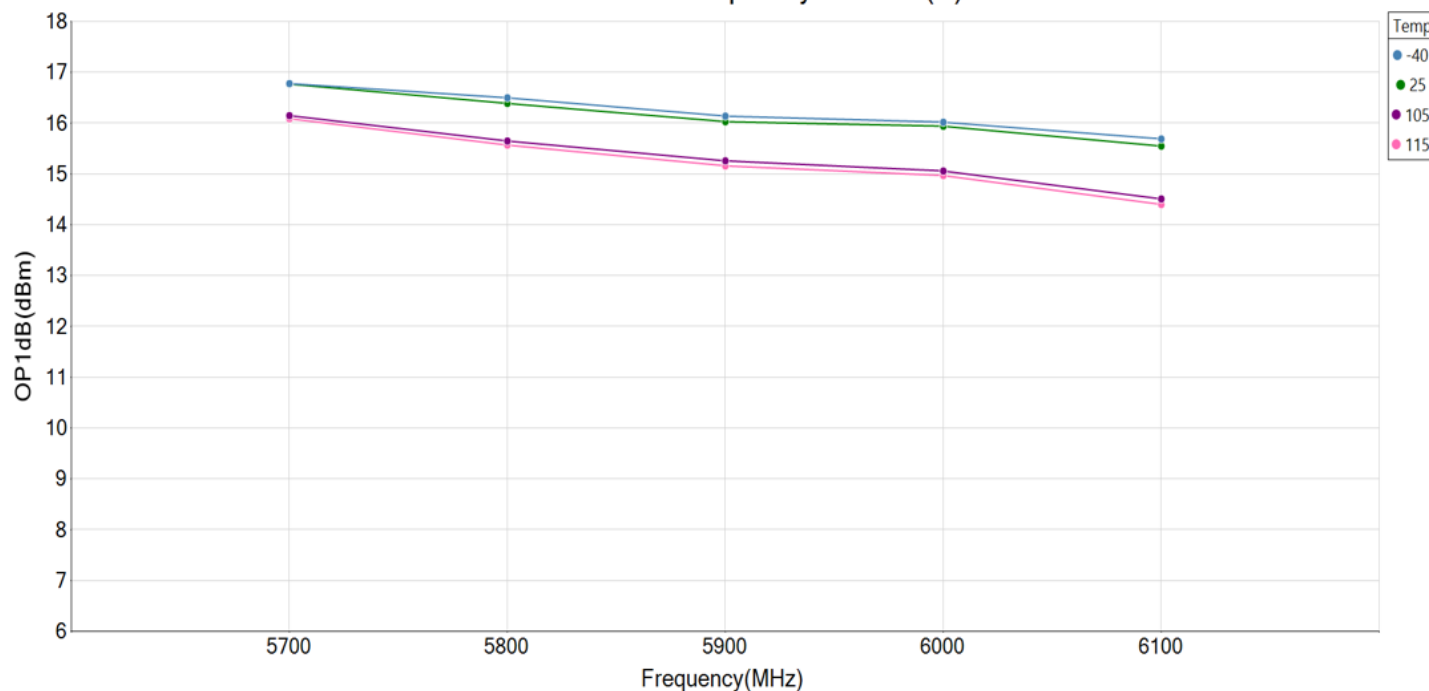


GRF2583 OP1dB vs Frequency at Ven2(V) = 0 V

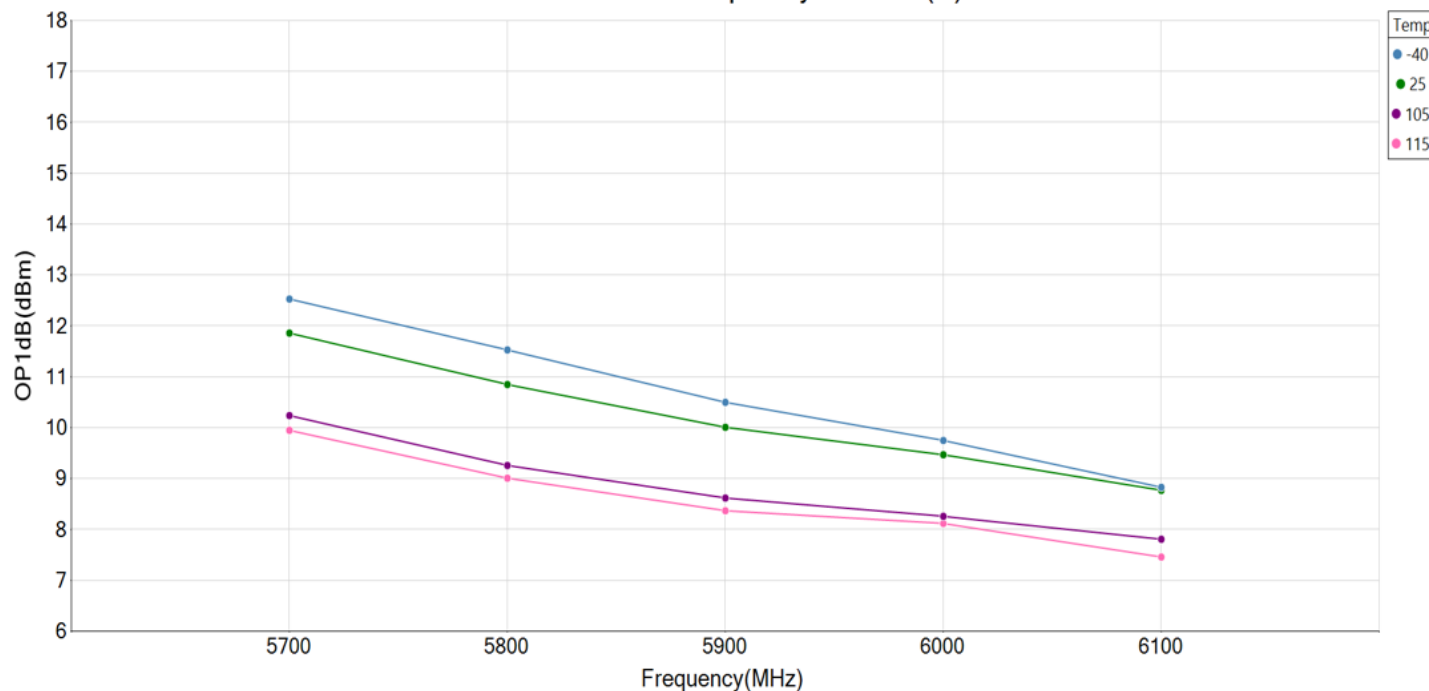


## GRF2583 S-Parameters: High Gain Mode (5.8 to 6 GHz)

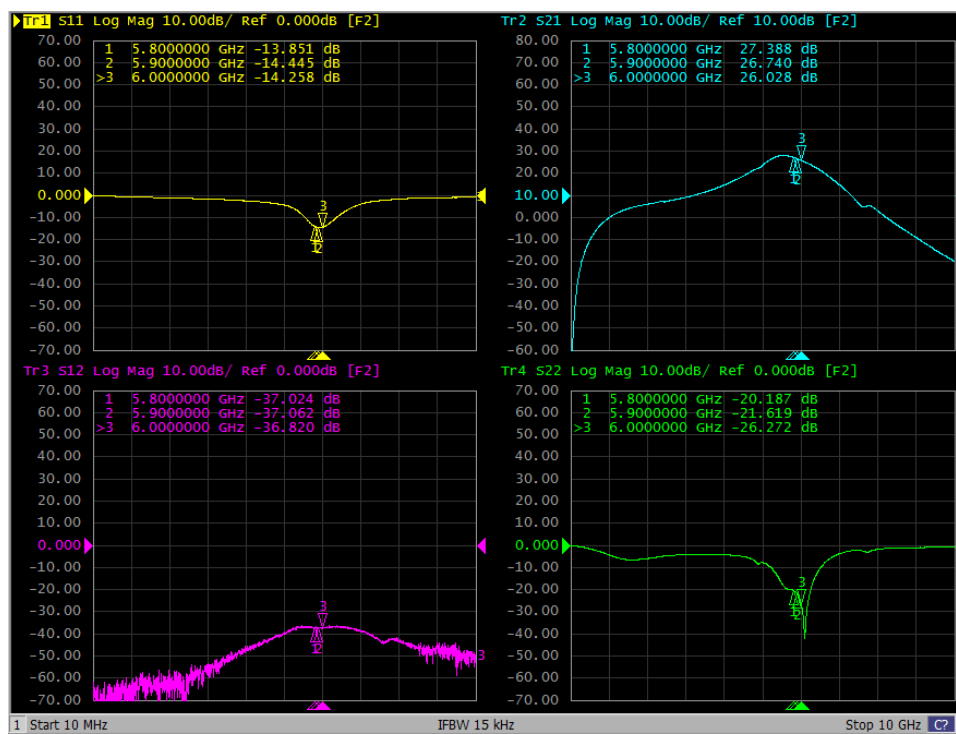


## GRF2583 S-Parameters: Low Gain Mode (5.8 to 6 GHz)

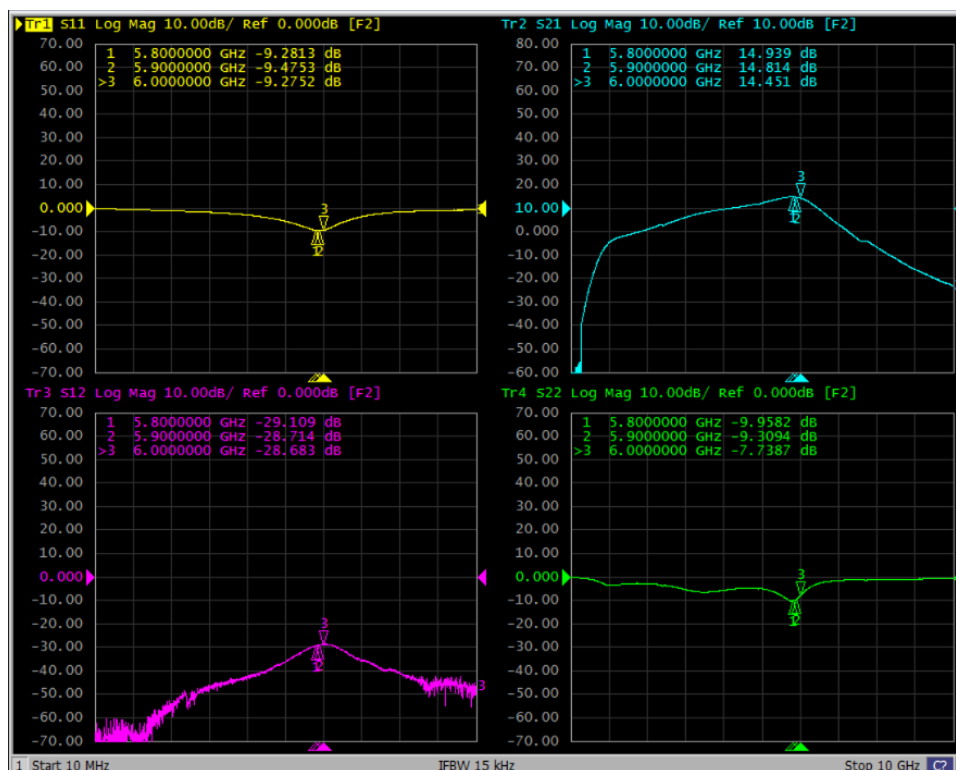

## GRF2583 Stability Mu Factor: High Gain Mode (10 MHz to 20 GHz)

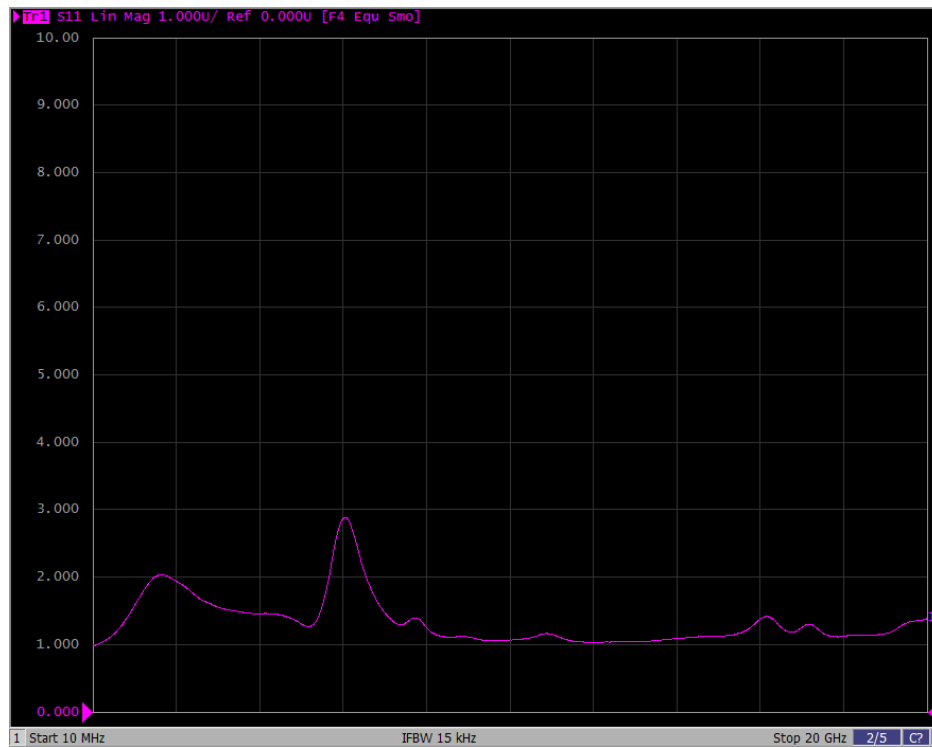

## GRF2583 Stability Mu Factor: Low Gain Mode (10 MHz to 20 GHz)

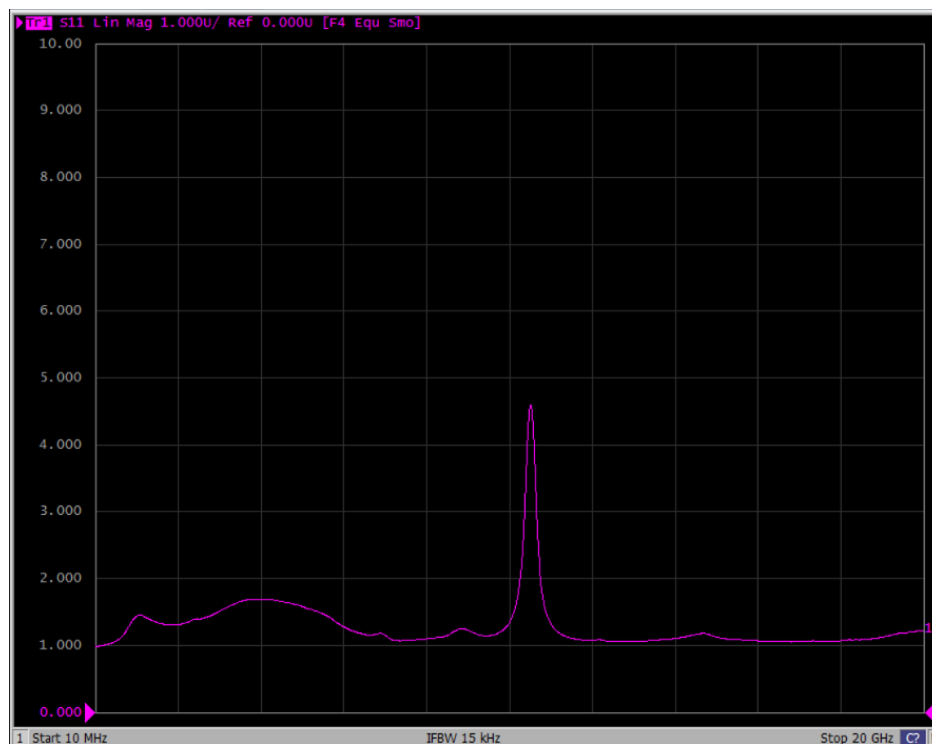









**GRF2583 Evaluation Board Assembly Diagram Reference**

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M2	Resistor	Various	5%	4.75 k $\Omega$	0402	ok
M3	Capacitor	Murata	GJM	0.5 pF	0402	ok
M4	Resistor	Various	5%	2 k $\Omega$	0402	ok
M7	Capacitor	Murata	GJM	0.1 $\mu$ F	0402	ok
M8	Resistor	Various	5%	3 $\Omega$	0402	ok
M9	Inductor	Murata	LQG-WH	6.8 nH	0402	ok
M10	Inductor	Murata	LQG	5.6 nH	0402	ok
M12	Capacitor	Murata	GJM	0.1 $\mu$ F	0402	ok
M13	Capacitor	Murata	GJM	18 pF	0402	ok
M14	Capacitor	Murata	GJM	0.5 pF	0402	ok
M1, M5, M6 M11	DNP	--	--	--	--	--
Evaluation Board	DFN6-15-47-A					

**Note:** Standard evaluation board bias:  $V_{DD} = 5$  V.

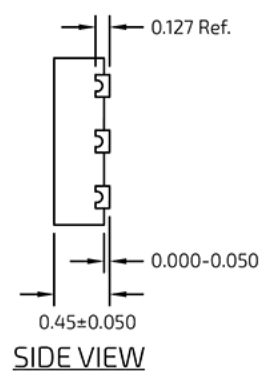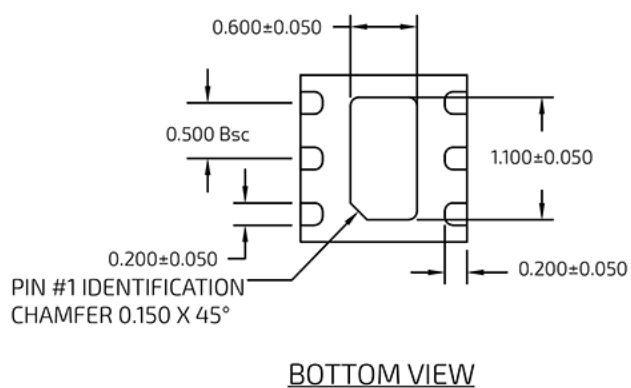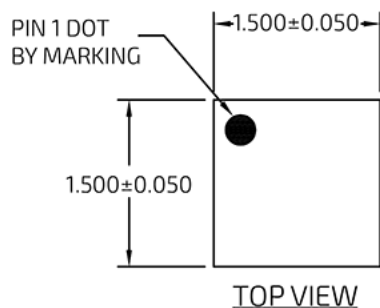

### DFN 6 1.5x1.5mm Package Dimensions

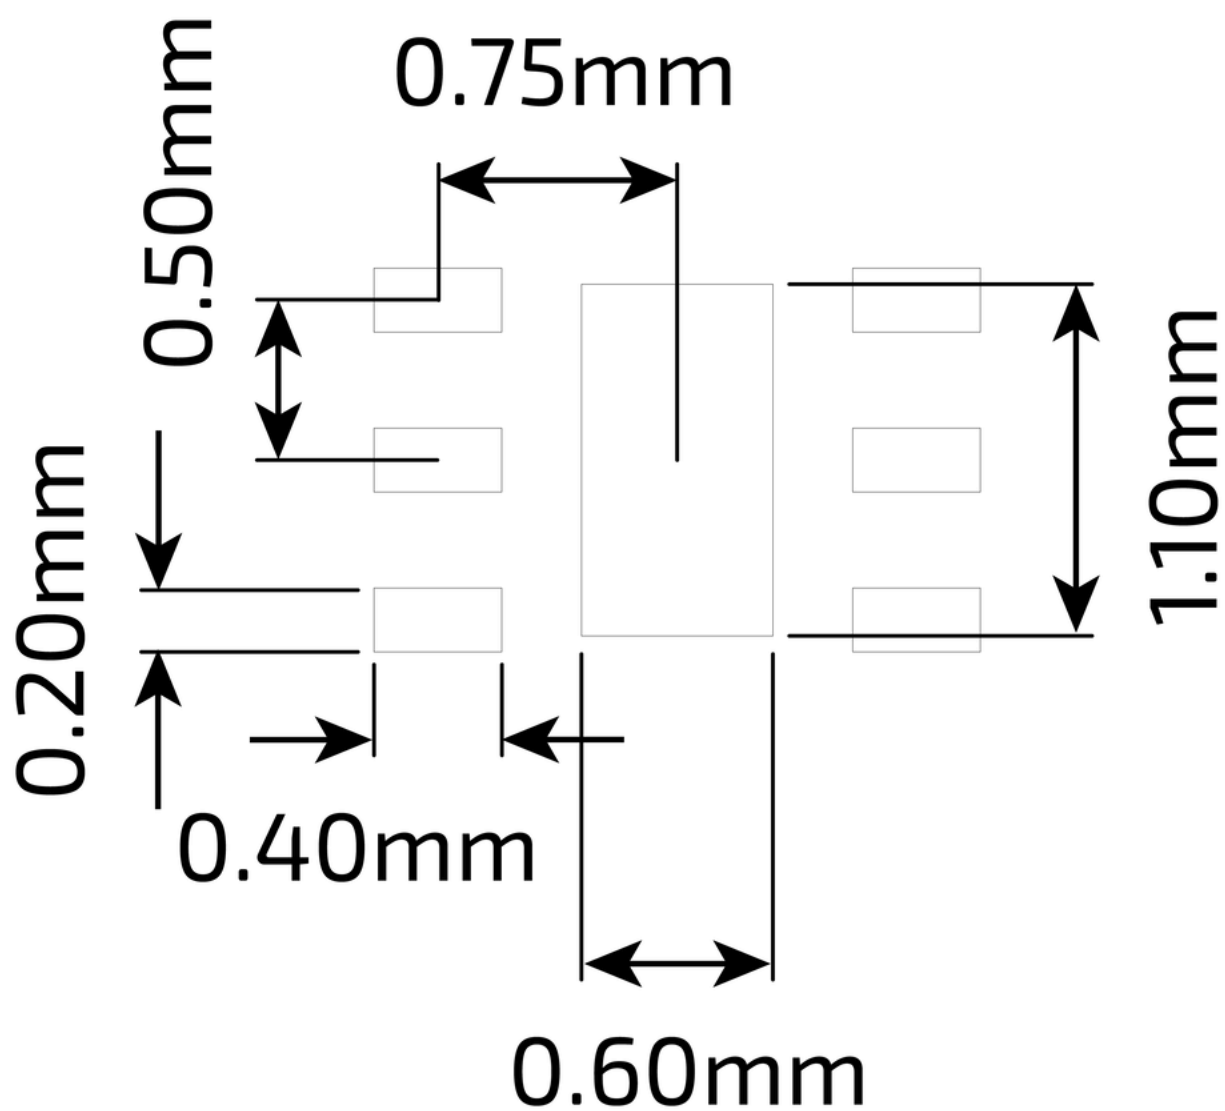

DFN 6 1.5x1.5mm Suggested PCB Footprint (Top View)


## Package Marking Diagram




Line 1: "Y" = YEAR (single digit). "WW" = WORK WEEK the Device was assembled.  
Line 2: "XXXX" = Device Part Number.

## Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag, and the outside surface of the box. For the latest reel specifications and package information (including units/reel), please visit [Package Manufacturing Information](#) | [Guerrilla RF](#) ([guerrilla-rf.com](http://guerrilla-rf.com)).

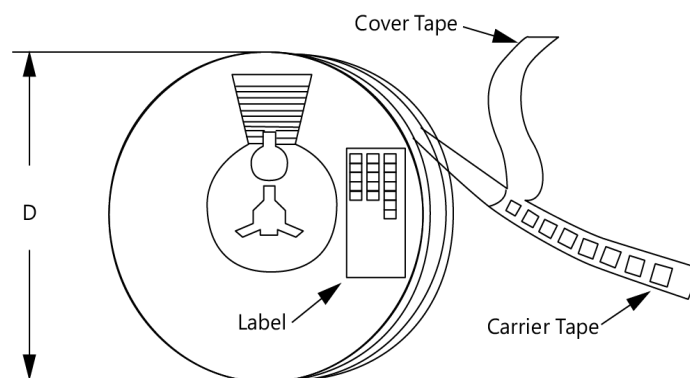

Tape and Reel Packaging with Reel Diameter Noted (D)

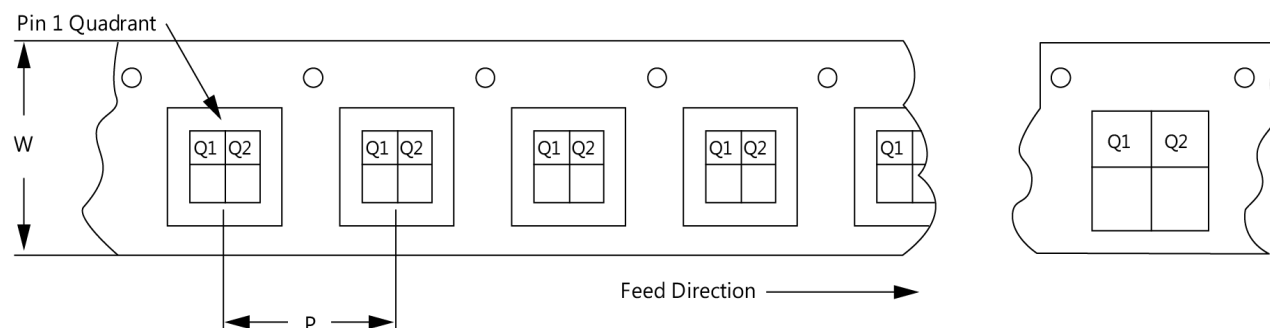

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information



**GRF2583** LNA with Selectable Gain 4.4 to 6 GHz

PRELIMINARY DATA SHEET

#### Revision History

Revision Date	Description of Change
May 21, 2024	Preliminary Data Sheet.
June 16, 2024	Lowered low end of Frequency Range from 5.8 to 4.4 GHz.



## Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the data sheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks, and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.