



## GRF4002W

**Linear Driver: SDARS / Compensator / GPS**  
**0.015 to 5.9 GHz**

RELEASE B DATA SHEET

### FEATURES

- Flexible Bias Voltage and Current
- Process: GaAs pHEMT
- Internally Matched to 50  $\Omega$
- Compact 1.5 x 1.5 mm DFN-6 Package

### AEC-Q100 Grade 2 Qualified

- 100% Device Reflow at Assembly
- 100% Optical Die Inspection

### Reference: 5 V / 70 mA / 2.5 GHz

- Gain: 15 dB
- OIP3: 36.5 dBm
- OP1dB: 23.5 dBm
- Evaluation Board Noise Figure: 0.85 dB

### APPLICATIONS

- SDARS LNA
- Cellular Repeaters (Compensator)
- GPS

 **ORDERING INFORMATION**  
 Buy it Now

### DESCRIPTION

The GRF4002W is a broadband low noise gain block designed for small cell, wireless infrastructure and other high performance applications. It exhibits outstanding broad-band noise figure (NF), linearity and return losses over 700 to 3800 MHz with a single match.


The device is operated from a supply voltage ( $V_{DD}$ ) of 1.8 to 5 volts with a selectable  $I_{DDQ}$  range of 20 to 80 mA for optimal efficiency and linearity.


GRF4002W is internally matched to 50  $\Omega$  at the input and output ports needing only external DC blocks and a bias choke on the output.

Please consult with the GRF applications engineering team for custom tuning/evaluation board data. Packaged device S-Parameters are available on the website landing page.

Additional tunes can be found on the GRF4002W "Custom Tunes" product page: [GRF4002W Custom Tunes](#)

### BLOCK DIAGRAM

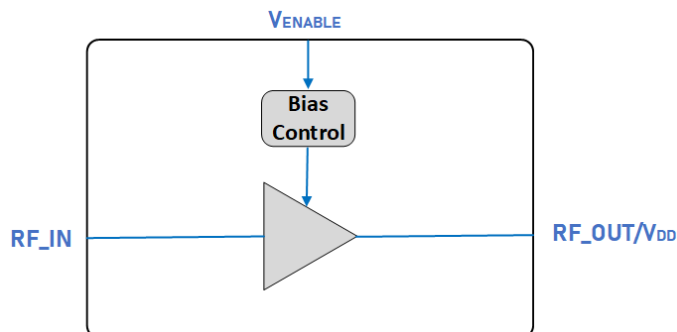

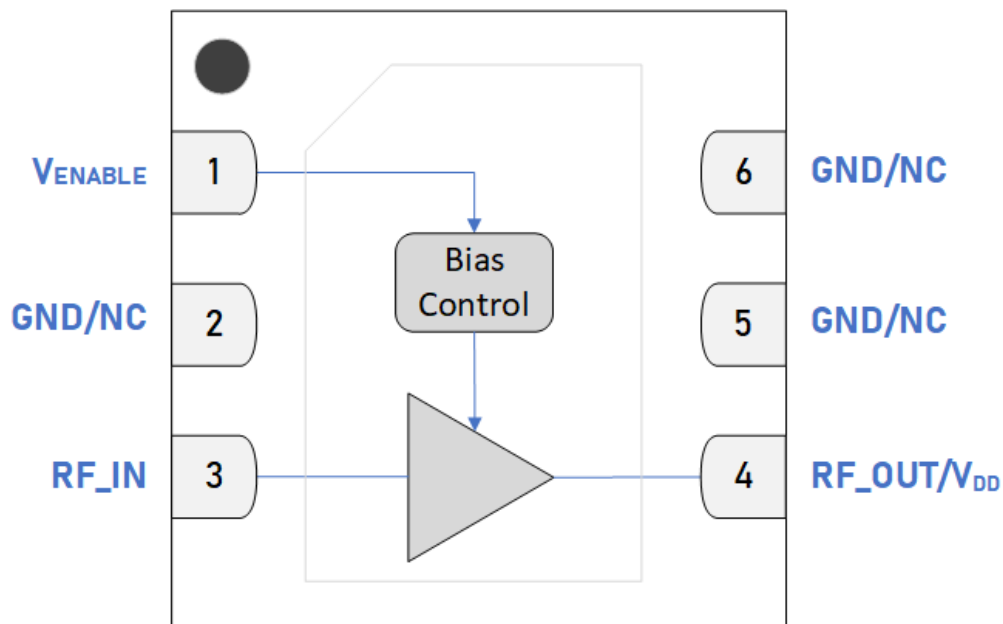

Pin Out (Top View)

## Pin Assignments

Pin	Name	Description	Note
1	V <sub>ENABLE</sub>	Enable Voltage Input	V <sub>ENABLE</sub> and series resistor set I <sub>DDQ</sub> . V <sub>ENABLE</sub> ≤ 0.2 volts disables device. On die pull-down resistor will turn the device off if this node is allowed to float.
2, 5, 6	GND/NC	Ground or No Connect	No internal connection to die. We recommend connecting these pins to GND.
3	RF_IN	LNA RF Input	Internally matched to 50 Ω. An external DC blocking capacitor must be used.
4	RF_OUT/V <sub>DD</sub>	LNA RF Output	Internally matched to 50 Ω. V <sub>DD</sub> must be applied through a choke to this pin.
PKG BASE	GND	Ground	Provides DC and RF ground for LNA, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

## Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	$V_{DD}$	0	6	V
RF Input Power: Load VSWR < 2:1, $V_{DD} = 5$ V	$P_{IN\ MAX}$		22	dBm
Operating Temperature (package base)	$T_{PKG\ BASE}$	-40	105	°C
Maximum Channel Temperature (MTTF > 10 <sup>6</sup> hours)	$T_{MAX}$		170	°C
Maximum Dissipated Power	$P_{DISS\ MAX}$		500	mW

## Electrostatic Discharge

Human Body Model	HBM	250		V
------------------	-----	-----	--	---

## Storage

Storage Temperature	$T_{STG}$	-65	150	°C
Moisture Sensitivity Level	MSL		1	--



**Caution! ESD Sensitive Device.**

**Exceeding Absolute Maximum Rating conditions may cause permanent damage.**

Note: For additional information, please refer to [Manufacturing Note MN-001 - Packaging and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging. For additional information, please refer to the [Certificate of RoHS Compliance](#).



## Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	$V_{DD}$	1.8	5	6	V	
Operating Temperature Range	$T_{PKG\ BASE}$	-40		105	°C	
RF Frequency Range	$F_{RF}$	0.015	2.5	5.9	GHz	Typical Application Schematic with external matching components <b>(notes 1 &amp; 2)</b> .
RF_IN Port Impedance	$Z_{RFIN}$		50		$\Omega$	
RF_OUT Port Impedance	$Z_{RFOUT}$		50		$\Omega$	

**Note 1:** Operation outside of this range is supported by using different custom tunes. Examples of other optimized tunes can be found here: [GRF4002W Custom Tunes](#)

**Note 2:** Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

## Nominal Operating Parameters - General

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current	$I_{DD}$		70		mA	$V_{DD} = 5\text{ V}$ , $V_{ENABLE} = 5\text{ V}$ .
Enable Current	$I_{ENABLE}$		2.2	3	mA	$V_{DD} = 5\text{ V}$ , $V_{ENABLE} = 5\text{ V}$ .
Switching Rise Time	$T_{RISE}$		500		ns	Gain mode to Disabled mode <b>(note 3)</b> .
Switching Fall Time	$T_{FALL}$		500		ns	Disabled mode to Gain mode <b>(note 4)</b> .

### Disabled Mode

Leakage Current	$I_{LEAKAGE}$		1	5	$\mu\text{A}$	$V_{DD} = 5\text{ V}$ , $V_{ENABLE} = 0\text{ V}$ .
-----------------	---------------	--	---	---	---------------	---

### Thermal Data

Thermal Resistance (Infrared Scan)	$\Theta_{JC}$		131		$^{\circ}\text{C}/\text{W}$	On standard evaluation board <b>(note 5)</b> .
------------------------------------	---------------	--	-----	--	-----------------------------	--

**Note 3:** Switching Time: 50% of  $V_{ENABLE}$  to 90% of  $P_{OUT}$ .

**Note 4:** Switching Time: 50% of  $V_{ENABLE}$  to 10% of  $P_{OUT}$ .

**Note 5:** MTTF >  $10^6$  hours for  $T_j \leq 170\text{ }^{\circ}\text{C}$ .




## Nominal Operating Parameters - RF

The following conditions apply unless noted otherwise; Typical Application Schematic,  $V_{DD} = 5\text{ V}$ ,  $50\ \Omega$  system impedance,  $F_{TEST} = 2.5\text{ GHz}$ ,  $T_{PKG\ BASE} = 25\text{ }^{\circ}\text{C}$ . Evaluation board losses are included within the specifications.


Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Gain	S21	14	15		dB	
Reverse Isolation	S12		> 23		dB	SDARS Tune
Noise Figure	NF		0.85	1	dB	On standard evaluation board.
Output 3rd Order Intercept Point	OIP3		36.5		dBm	2 dBm $P_{OUT}$ per tone. 2 MHz spacing (2499 and 2501 MHz).
Output 1 dB Compression Power	OP1dB	22	23.5		dBm	

## GRF4002W Typical Operating Curves: 0.7 to 3.8 GHz

### GRF4002 Gain vs Frequency

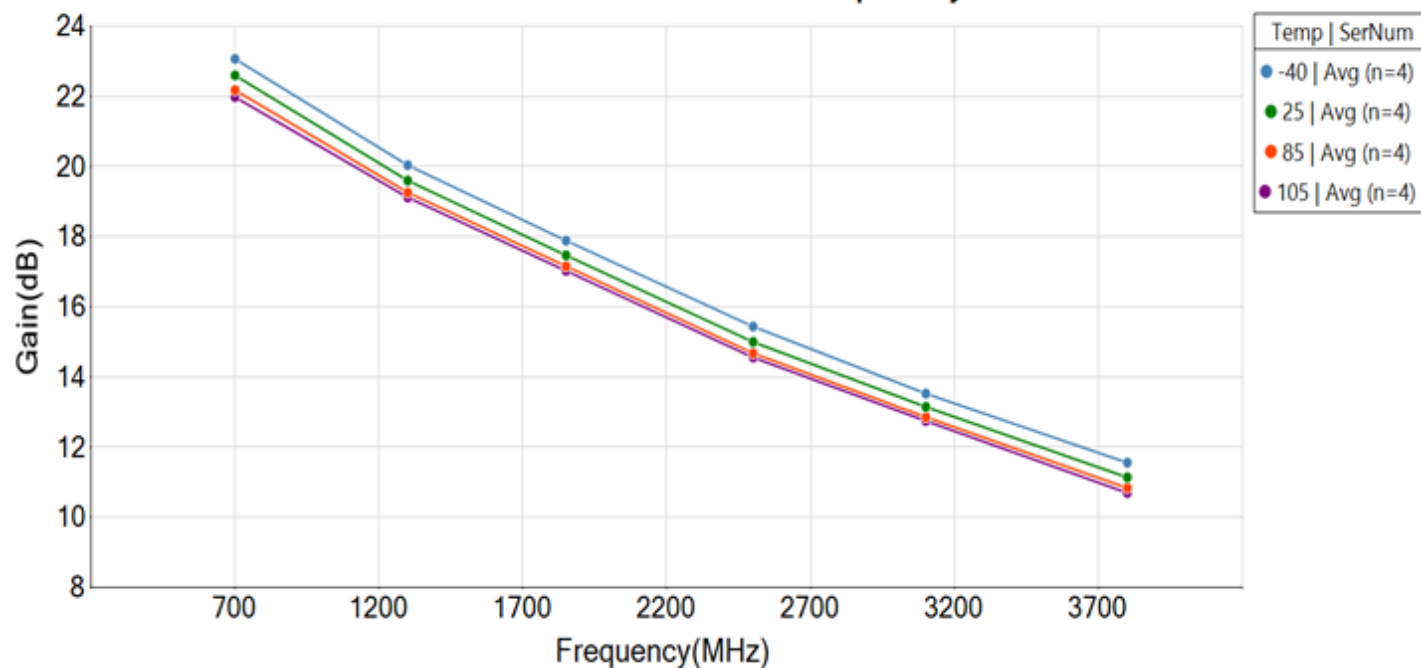


### GRF4002 Noise Figure vs Frequency

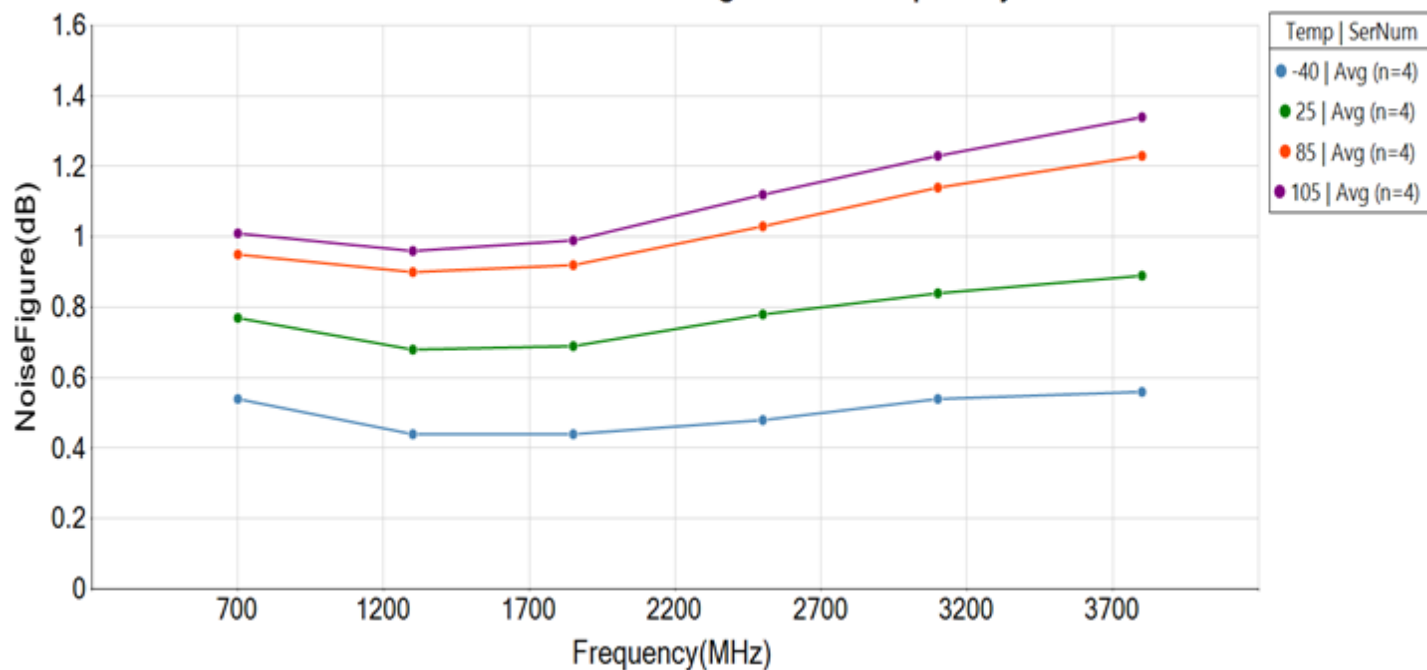




## GRF4002W Typical Operating Curves: 0.7 to 3.8 GHz


### GRF4002 OP1dB vs Frequency

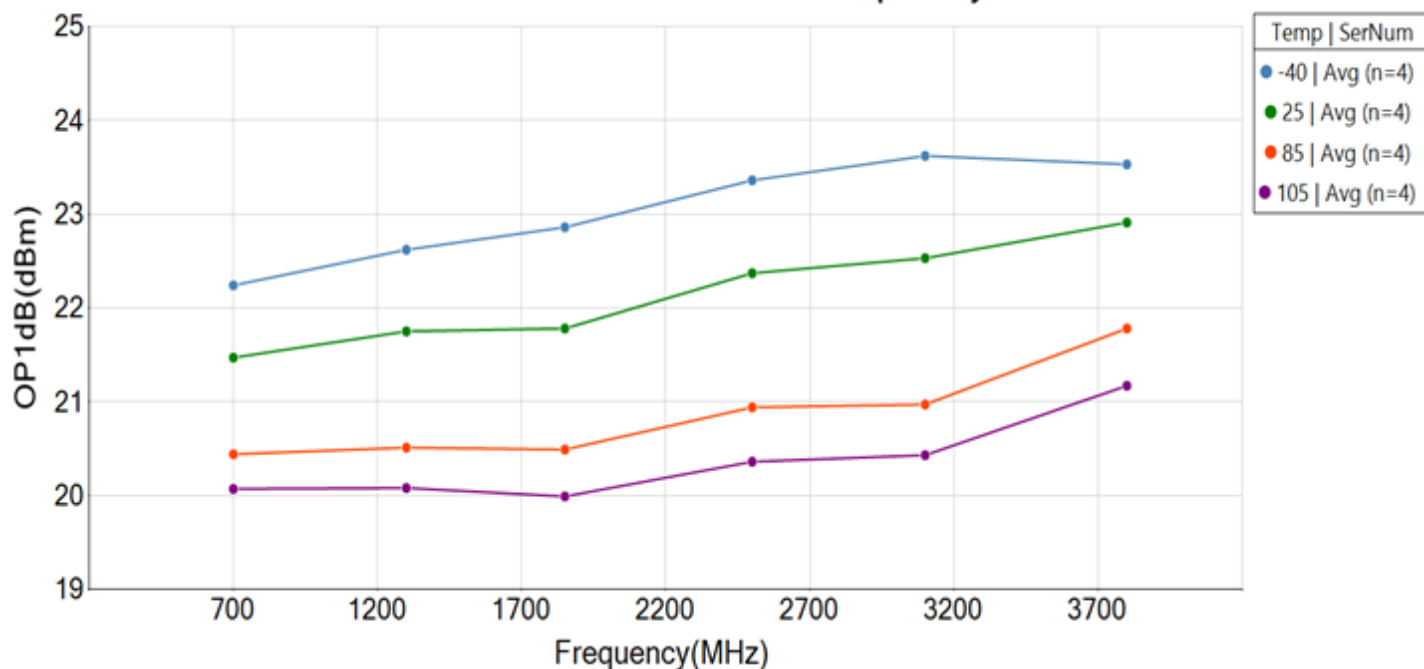


### GRF4002 OIP3 vs Frequency at Pout = 2 dBm

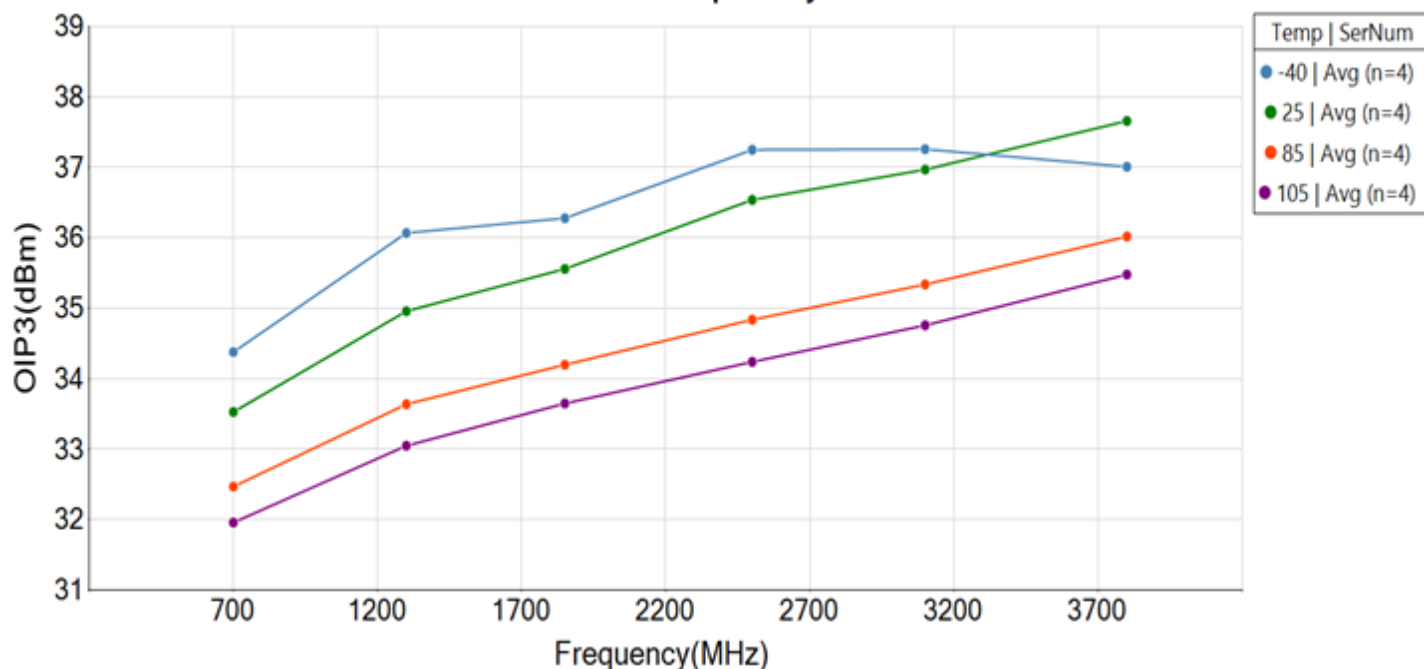


## GRF4002W Typical Operating Curves: S-Parameters (0.7 to 3.8 GHz)

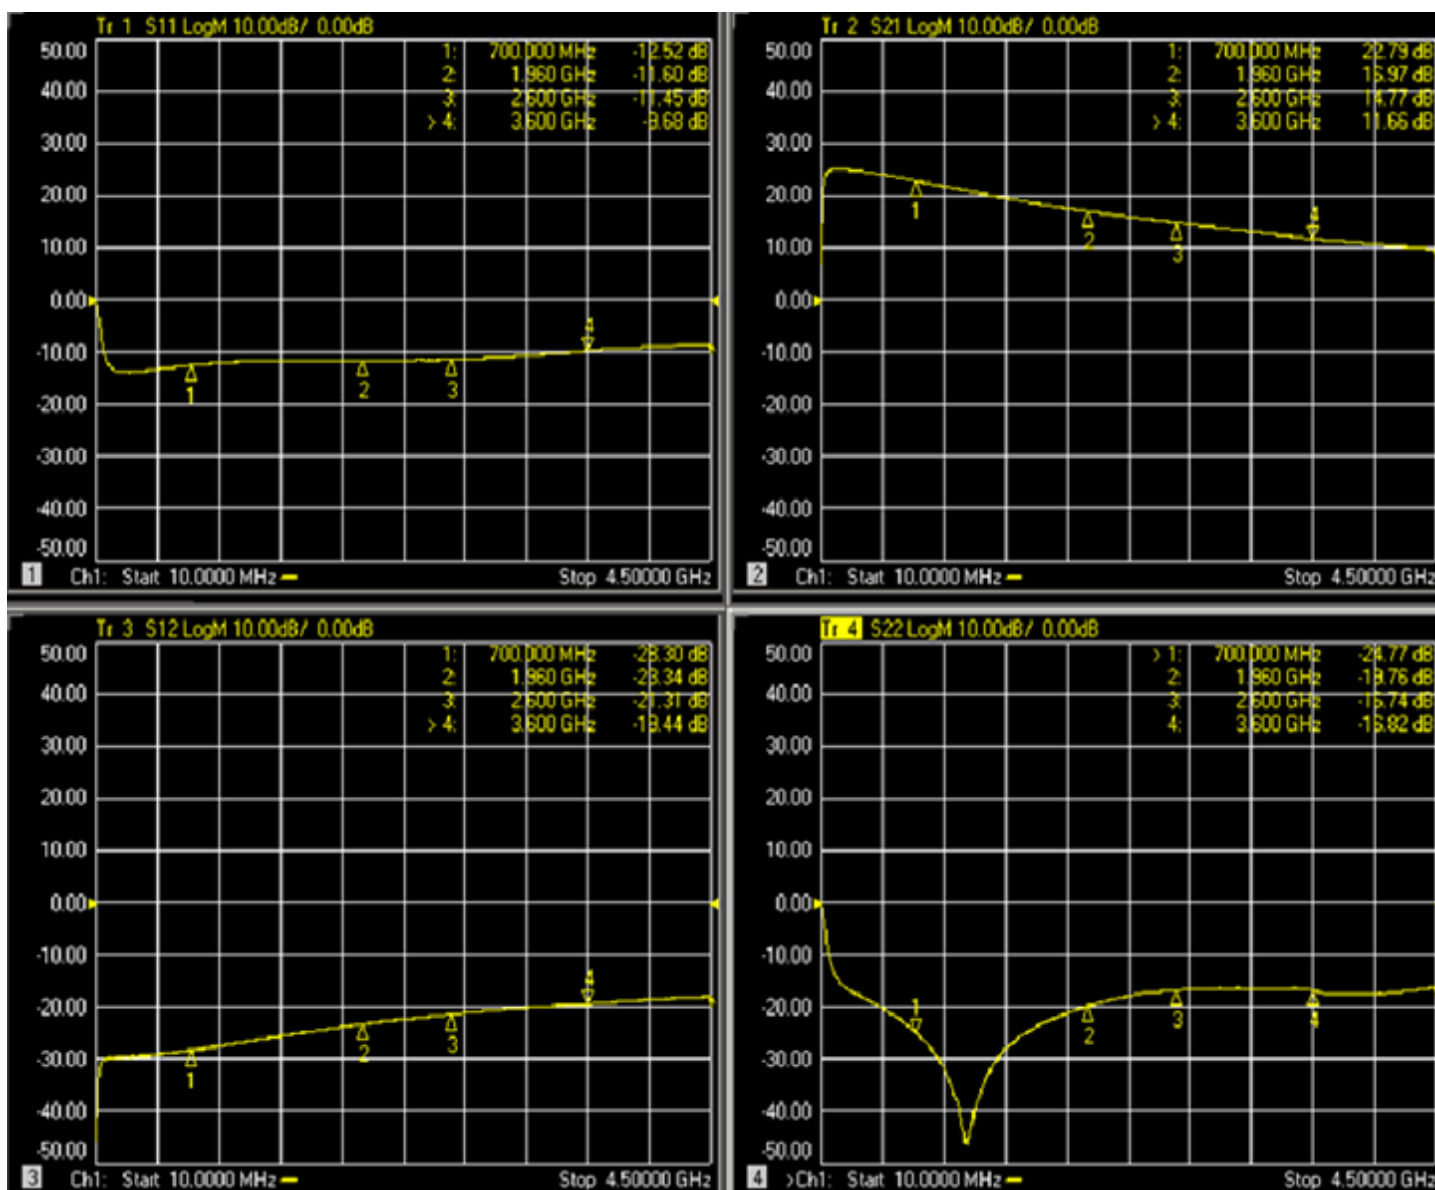


## GRF4002W Typical Operating Curves: Stability Mu Factor (10 MHz to 20 GHz)

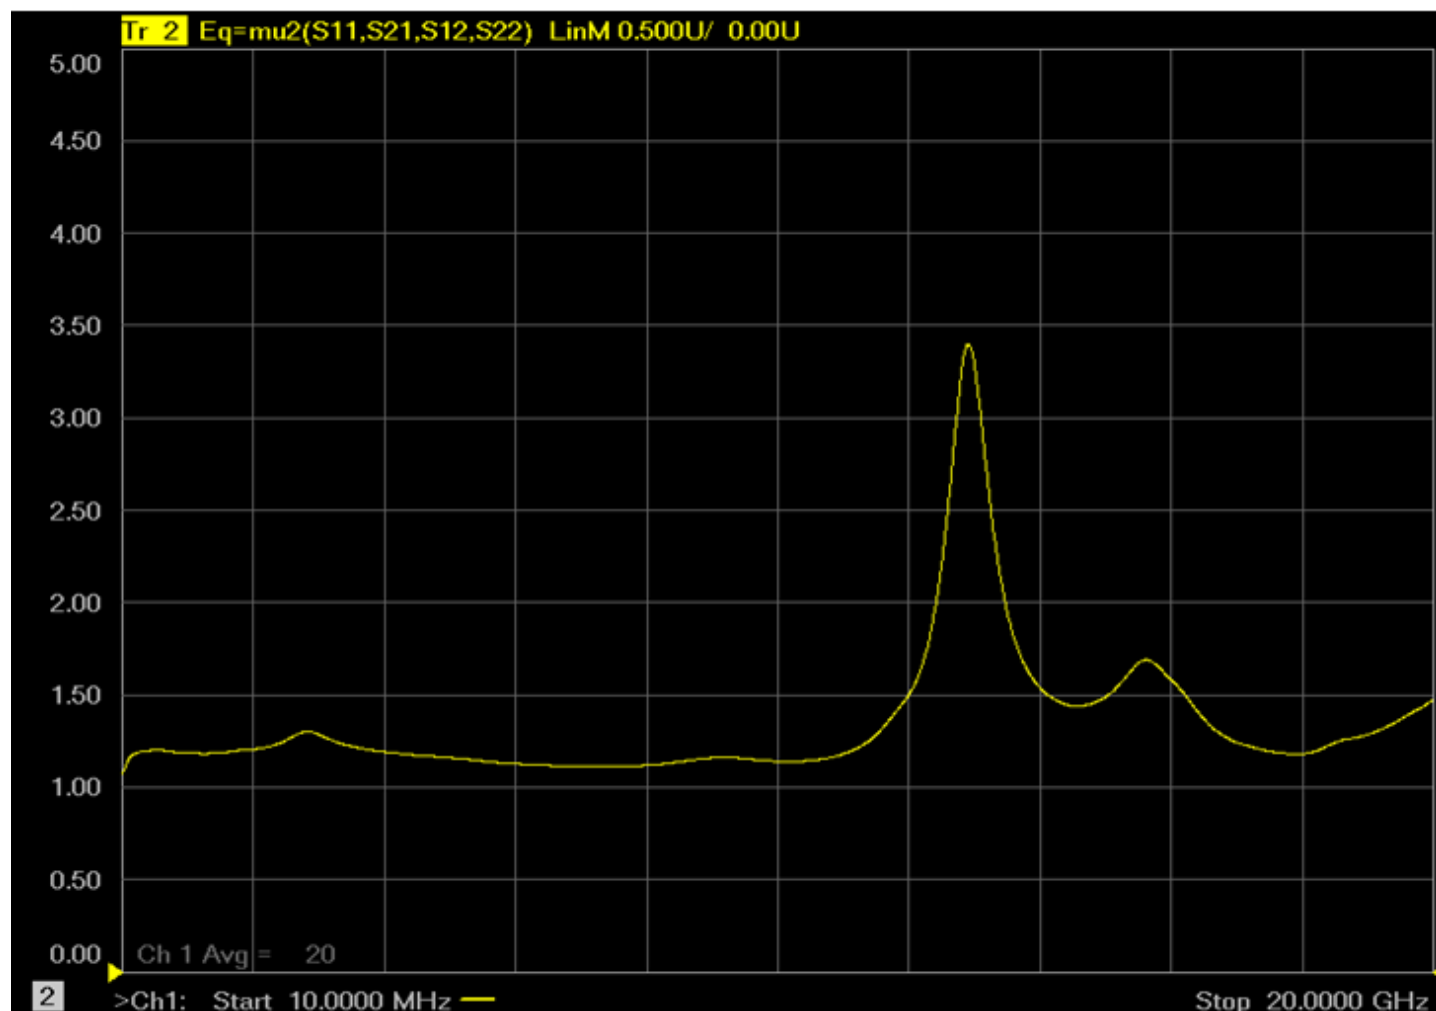

Note:  $\mu \geq 1$  implies unconditional stability.

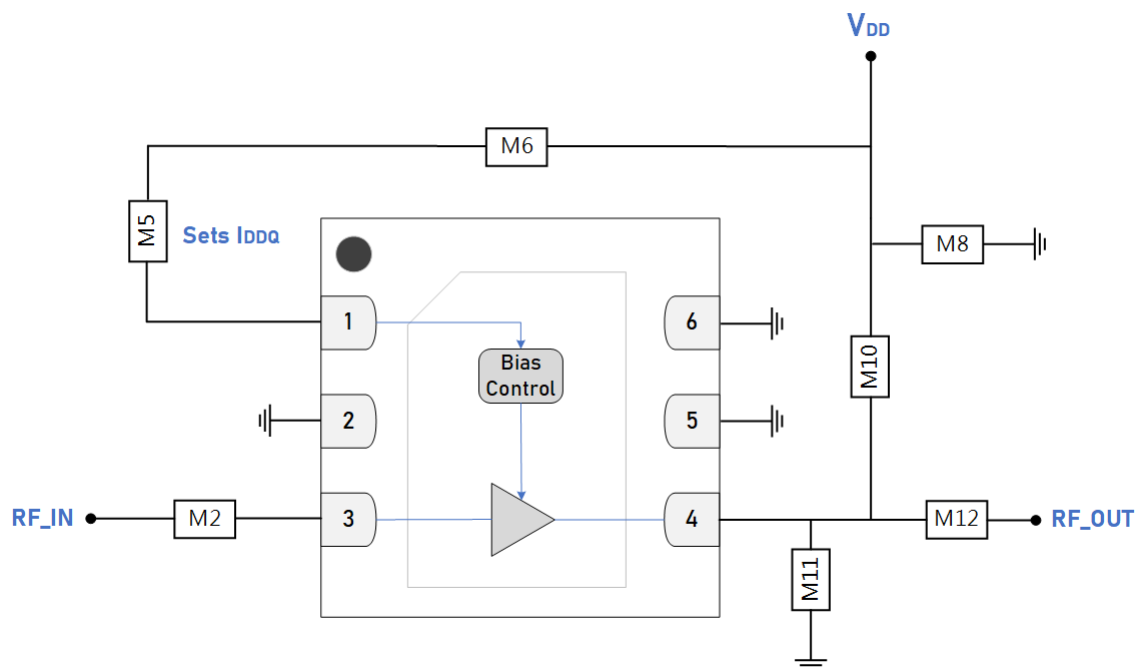

**GRF4002W Standard Evaluation Board Schematic**

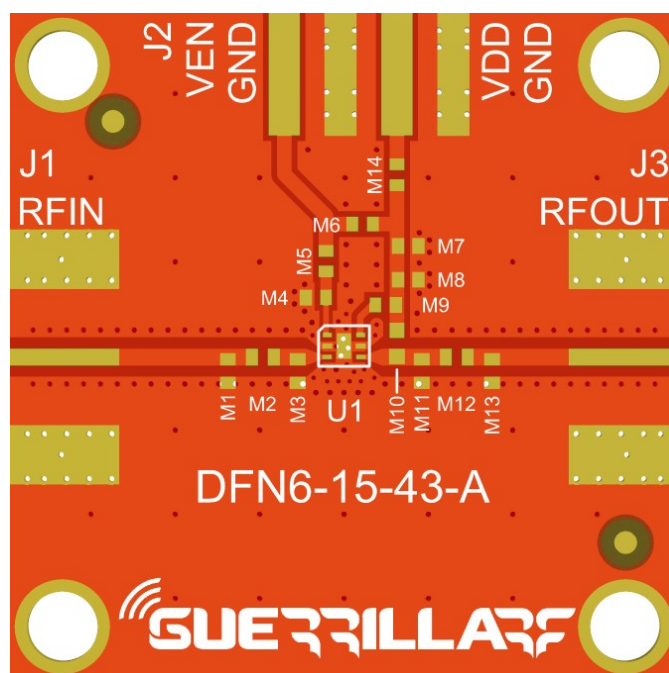





**GRF4002W Evaluation Board Assembly Diagram**

## GRF4002W Evaluation Board Assembly Diagram Reference: 0.1 to 3.8 GHz Tune


Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M2	Capacitor	Murata	GJM	100 pF	0402	ok
M5 (sets I <sub>DDQ</sub> )	Resistor	Various	5%	See Curves	0402	ok
M6	Resistor (jumper)	Various	5%	0 $\Omega$	0402	ok
M8	Capacitor	Murata	GJM	0.1 $\mu$ F	0402	ok
M10	Inductor	Coilcraft	HP	100 nH	0402	ok
M11	Capacitor	Murata	GJM	0.5 pF	0402	ok
M12	Capacitor	Murata	GJM	100 pF	0402	ok
Evaluation Board	DFN6-15-43-A					

## GRF4002W Bias Resistor Selection Curves

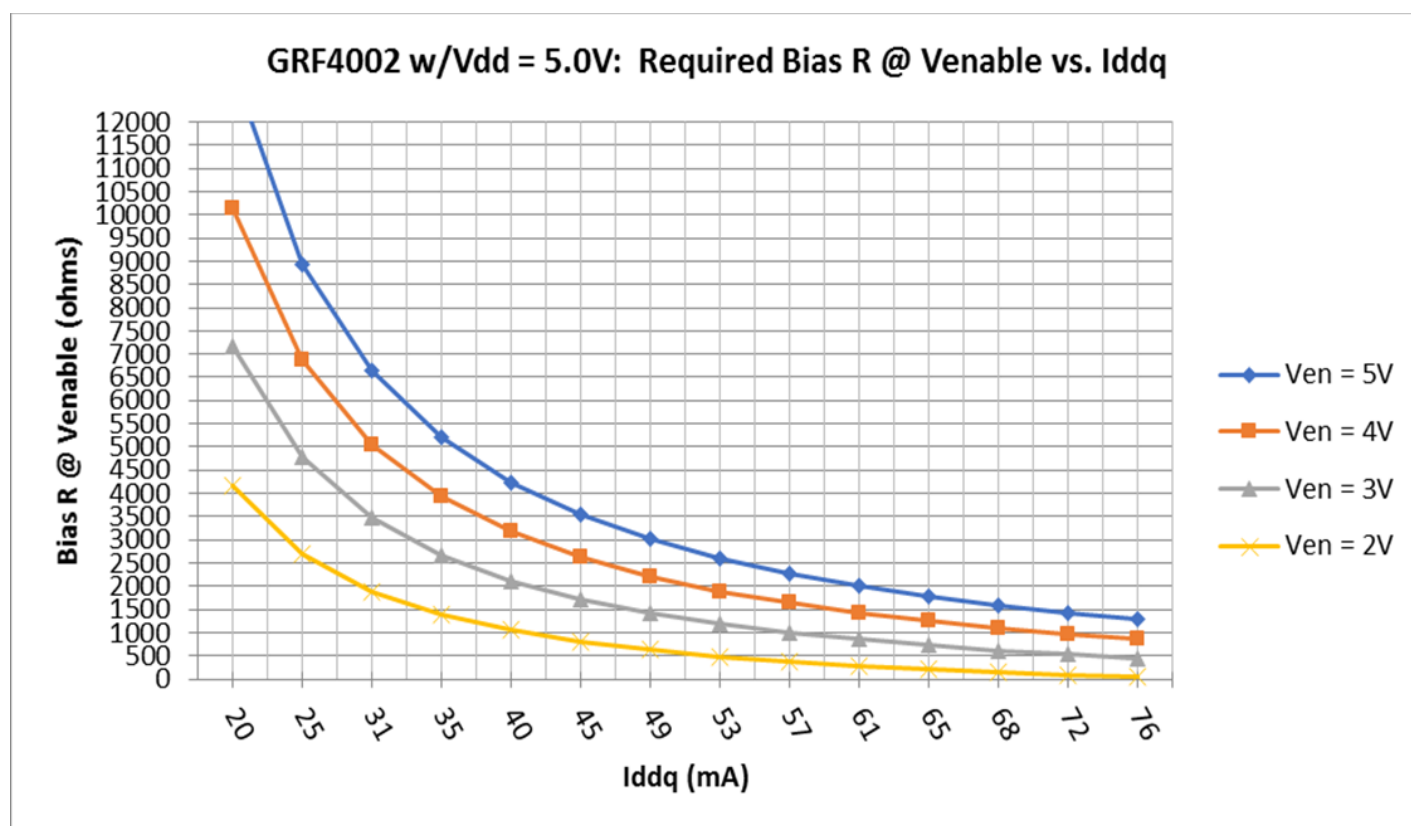

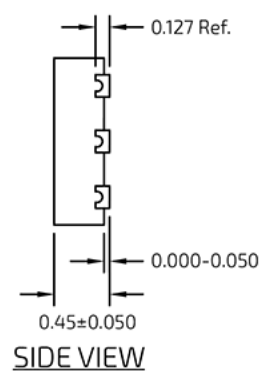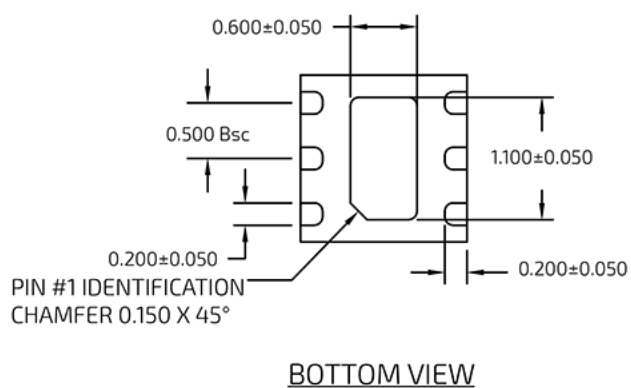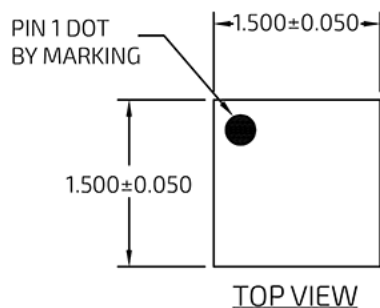

### DFN 6 1.5x1.5mm Package Dimensions

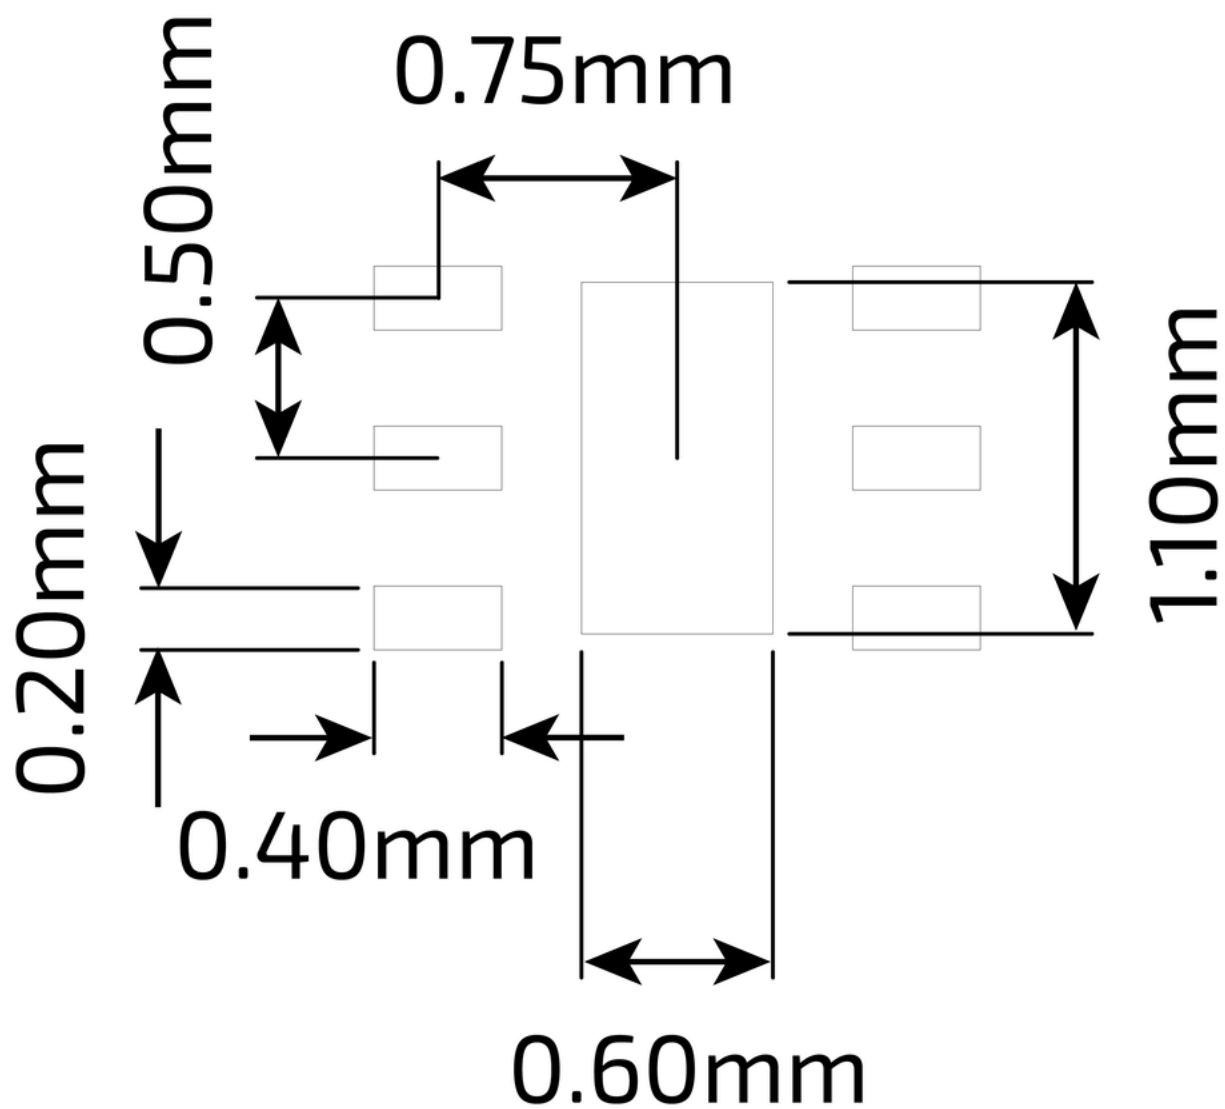

DFN 6 1.5x1.5mm Suggested PCB Footprint (Top View)


## Package Marking Diagram




Line 1: "Y" = YEAR (single digit). "WW" = WORK WEEK and "w" = W for automotive.  
Line 2: "XXXX" = Device Part Number.

## Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag, and the outside surface of the box. For the latest reel specifications and package information (including units/reel), please visit [Package Manufacturing Information](#) | [Guerrilla RF](#) ([guerrilla-rf.com](http://guerrilla-rf.com)).

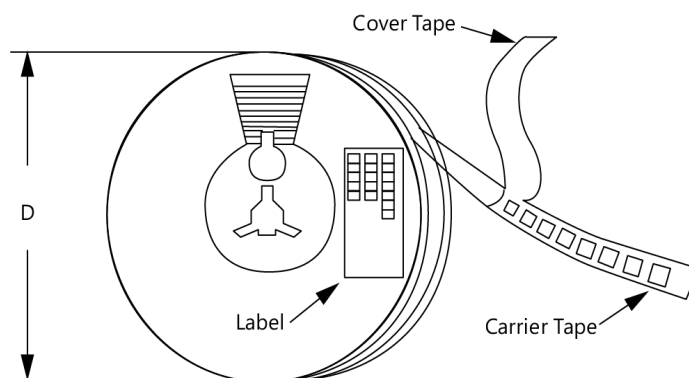

Tape and Reel Packaging with Reel Diameter Noted (D)

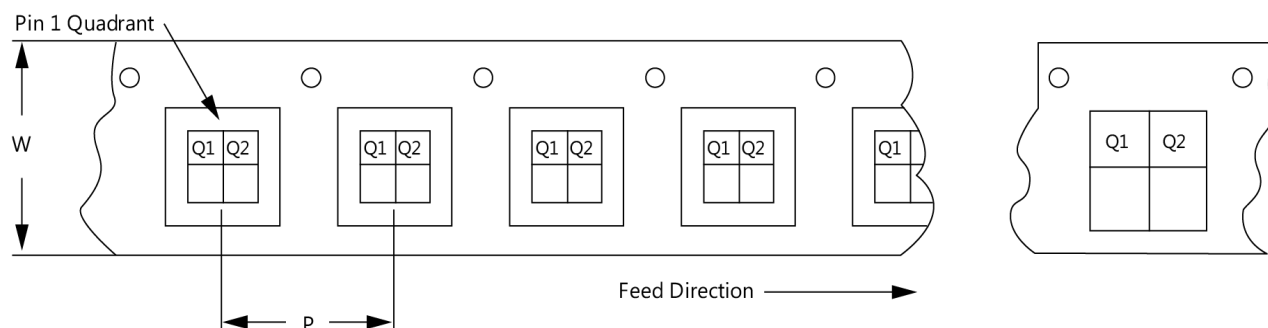

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information





**GRF4002W** Linear Driver: SDARS / Compensator / GPS 0.015 to 5.9 GHz

RELEASE B DATA SHEET

### Revision History

Revision Date	Description of Change
February 15, 2019	Release Ø Data Sheet.
June 1, 2022	Release A Data Sheet. Upgraded Data Sheet to new format.
August 4, 2023	Upgraded Data Sheet to newest format only.
September 12, 2023	Release B Data Sheet.
February 18, 2025	Added new evaluation board.
May 12, 2025	Extended frequency range from 100 - 3800 MHz to 15 - 5900 MHz.

**Data Sheet Classifications**

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the data sheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks, and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.