



GRF4015

High Frequency Power-LNA

0.7 to 9 GHz

RELEASE Ø DATA SHEET

FEATURES

- Flexible Bias Voltage and Current
- Process: GaAs pHEMT
- Compact 1.5 x 1.5 mm DFN-6 Package

Reference: 5 V / 165 mA / 2.5 GHz

- Gain: 21 dB
- OP1dB: 25.4 dBm
- OIP3: 41 dBm
- Evaluation Board Noise Figure: 1.5 dB

APPLICATIONS

- Linear Driver/PA/LNA
- Small Cells and Cellular Repeaters
- Multi-stage LNA
- Microwave Backhaul

 **ORDERING INFORMATION**
Buy it Now


DESCRIPTION


The GRF4015 is a high linearity PA/Linear Driver with low Noise Figure (NF). It delivers excellent P1dB, IP3 and NF over a wide range of frequencies with fractional bandwidths > 15 % and is well suited to demanding 802.11ac 5 GHz PA/Driver applications. The device offers flexible biasing to achieve optimal linearity and efficiency and can be tuned over a wide range of frequencies from 0.7 to 9 GHz.

Please consult with the GRF applications engineering team for custom tuning/evaluation board data and device S-parameters.

Additional tunes can be found on the GRF4015 "Custom Tunes" product page: [GRF4015 Custom Tunes](#)

BLOCK DIAGRAM

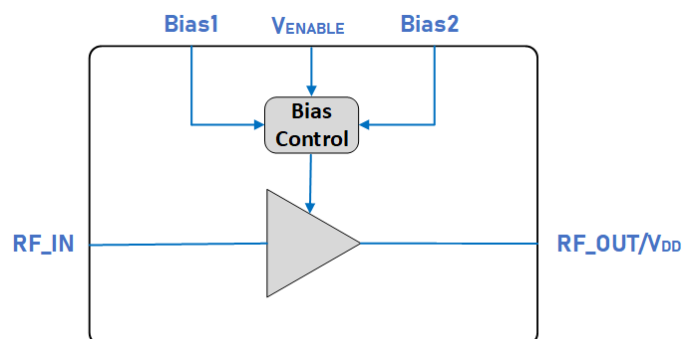

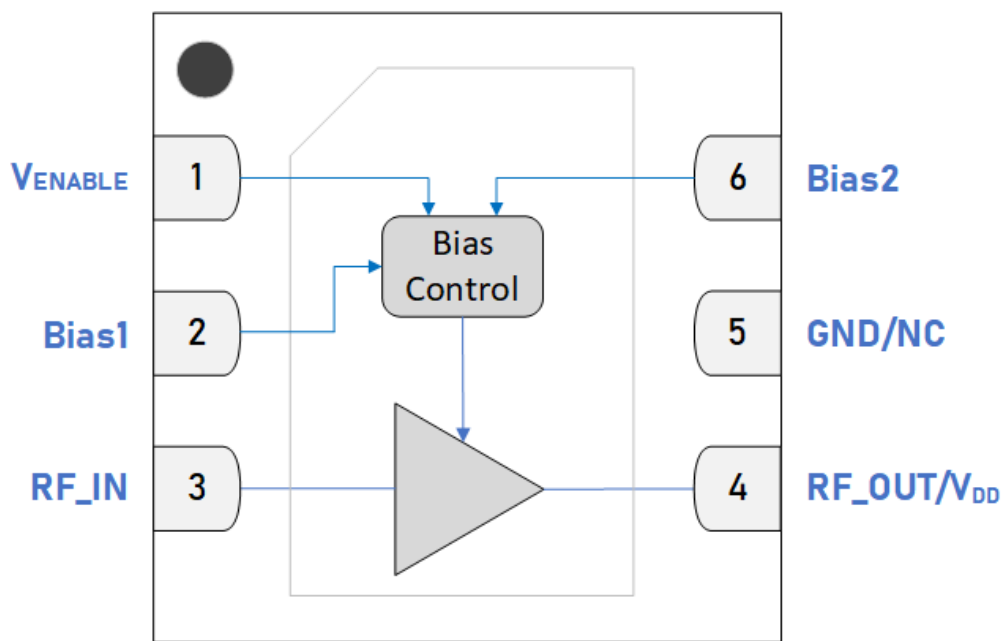

Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
1	V _{ENABLE}	Enable Voltage Input	V _{ENABLE} and series resistor set I _{DDQ} . V _{ENABLE} ≤ 0.2 volts disables device. On-die pull-down resistor will turn the device off if this node is allowed to float.
2	Bias1	Bias1 Circuit Supply	Connect to ground via R-L network for linearity optimization.
3	RF_IN	LNA RF Input	An external DC blocking capacitor must be used.
4	RF_OUT/V _{DD}	LNA RF Output	V _{DD} must be applied through a choke to this Pin.
5	GND/NC	Ground or No Connect	No internal connection to die. We recommend connecting these pins to ground.
6	Bias2	Bias2 Circuit Supply	Connect to V _{DD} through an external resistor.
PKG BASE	GND	Ground	Provides DC and RF ground for LNA as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Drain Voltage	V_{DD}	3	9	V
Transient Average RF Input Power CW: Load VSWR < 2:1	$P_{IN\ MAX}$		20	dBm
Operating Temperature (Package Base)	$T_{PKG\ BASE}$	-40	115	°C
Maximum Channel Temperature (MTTF > 10 ⁶ Hours)	T_{MAX}		170	°C
Maximum Dissipated Power at 85 °C (DC only, no RF applied)	$P_{DISS\ MAX}$		1.3	W
Maximum Dissipated Power at 105 °C (DC only, no RF applied)	$P_{DISS\ MAX}$		1.0	W
Maximum Dissipated Power at 115 °C (DC only, no RF applied)	$P_{DISS\ MAX}$		0.86	W

Electrostatic Discharge

Human Body Model	HBM	250		V
------------------	-----	-----	--	---

Storage

Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--


Caution! ESD Sensitive Device.
Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 - Packaging and Manufacturing Information](#).

All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging. For additional information, please refer to the [Certificate of RoHS Compliance](#).

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Drain Voltage	V_{DD}	3.3	5	8	V	
Operating Temperature Range	$T_{PKG\ BASE}$	-40		115	°C	
RF Frequency Range	F_{RF}	0.7	2.5	9	GHz	Typical application schematic with external matching components (note 1 & 2).
RF_IN Port Impedance	Z_{RFIN}		50		Ω	Single-ended, 3 element match.
RF_Out Port Impedance	Z_{RFOUT}		50		Ω	Single-ended, 3 element match.

Note 1: Operation outside of this range is supported by using different custom tunes. Examples of other optimized tunes can be found here: [GRF4015 Custom Tunes](#)

Note 2: Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

Nominal Operating Parameters - General

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current	I_{DD}		165		mA	$V_{DD} = 5\text{ V}$, $V_{ENABLE} = 5\text{ V}$. Adjustable for optimal IP3.
Enable Current	I_{ENABLE}		4.5		mA	$V_{DD} = 5\text{ V}$, $V_{ENABLE} = 5\text{ V}$.
Switching Rise Time	T_{RISE}		20		ns	Disabled mode to Gain mode (note 3).
Switching Fall Time	T_{FALL}		30		ns	Gain mode to Disabled mode (note 4).

Disabled Mode

Leakage Current	$I_{LEAKAGE}$		490		μA	$V_{DD} = 5\text{ V}$, $V_{ENABLE} = 0\text{ V}$.
-----------------	---------------	--	-----	--	---------------	---

Thermal Data

Thermal Resistance (Infrared Scan)	Θ_{JC}		68		$^{\circ}\text{C}/\text{W}$	On standard evaluation board (note 5).
------------------------------------	---------------	--	----	--	-----------------------------	---

Note 3: Switching Time: 50% of V_{ENABLE} to 90% of P_{OUT} .

Note 4: Switching Time: 50% of V_{ENABLE} to 10% of P_{OUT} .



Note 5: MTTF > 10^6 hours for $T_{CHANNEL} \leq 170\text{ }^{\circ}\text{C}$.

Nominal Operating Parameters - RF



The following conditions apply unless noted otherwise: typical application schematic, $V_{DD} = V_{ENABLE} = 5\text{ V}$, $I_{DD} = 165\text{ mA}$, $F_{TEST} = 2.5\text{ GHz}$, $50\ \Omega$ system impedance, $T_{PKG\ BASE} = 25\text{ }^{\circ}\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Gain	S21		21		dB	
Noise Figure	NF		1.5		dB	On standard evaluation board (includes board losses).
Output 3rd Order Intercept Point	OIP3		41		dBm	+8 dBm P_{OUT} per tone at 2 MHz spacing (2499 and 2501 MHz).
Output 1 dB Compression Power	OP1dB		25.4		dBm	


GRF4015 Typical Operating Curves: 2.3 to 2.7 GHz Tune

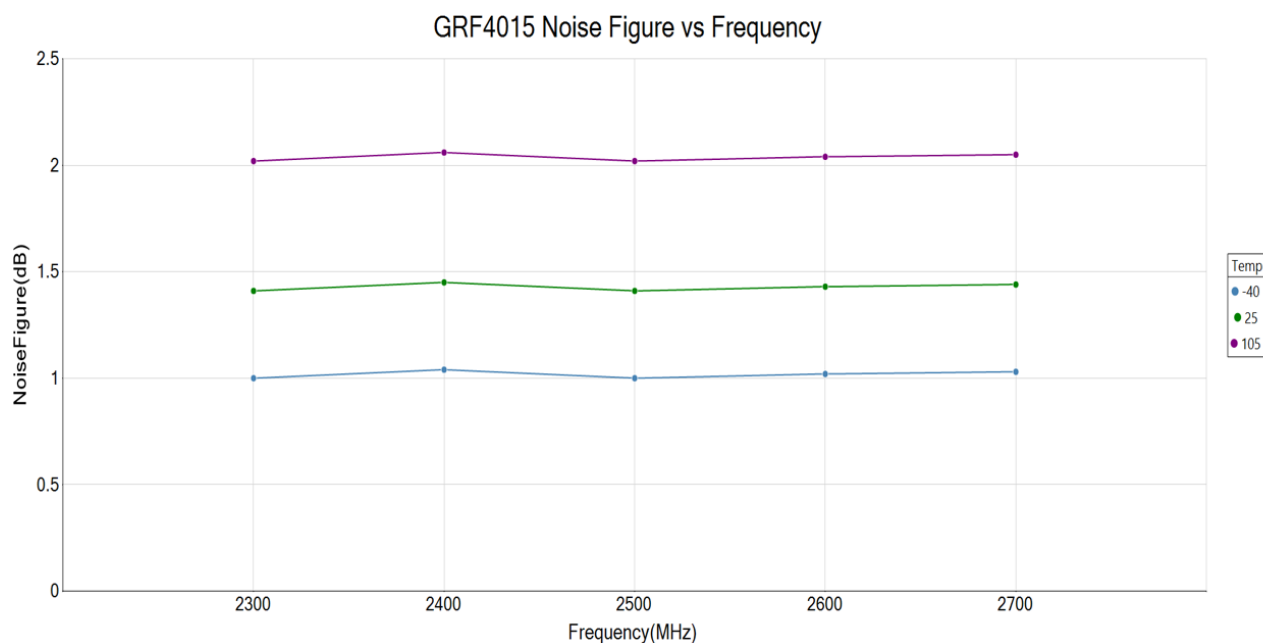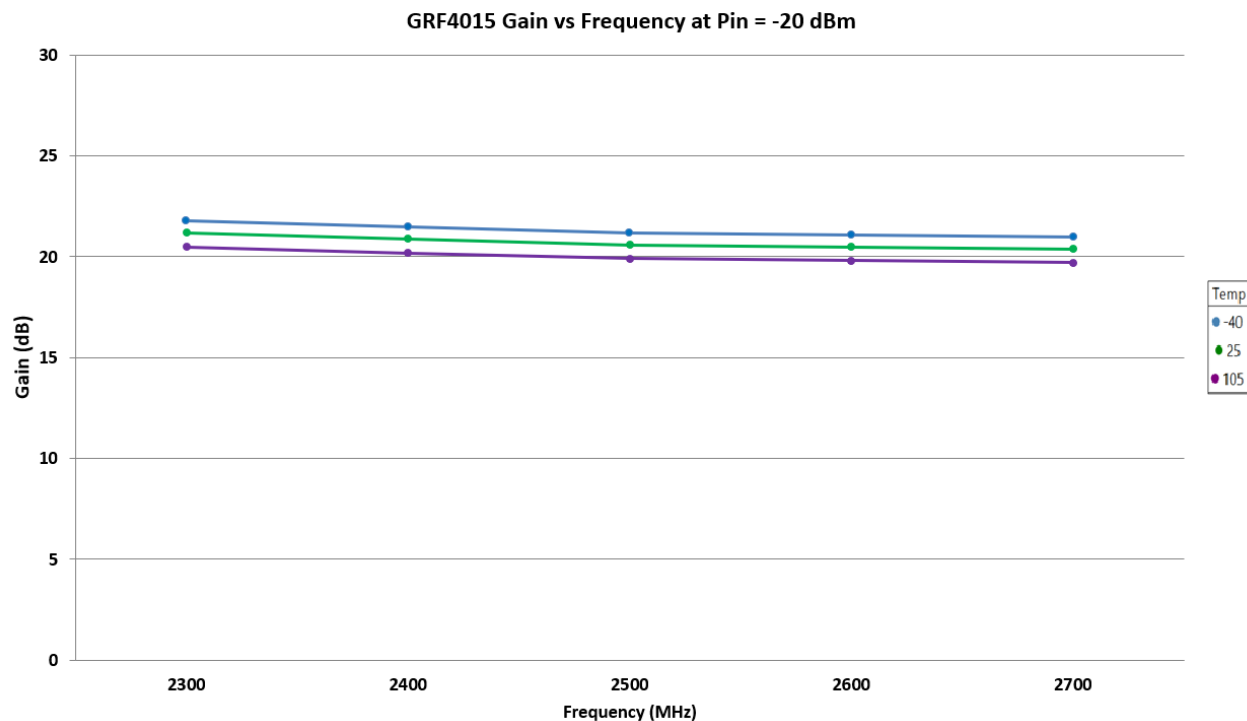


GRF4015 Typical Operating Curves: 2.3 to 2.7 GHz Tune

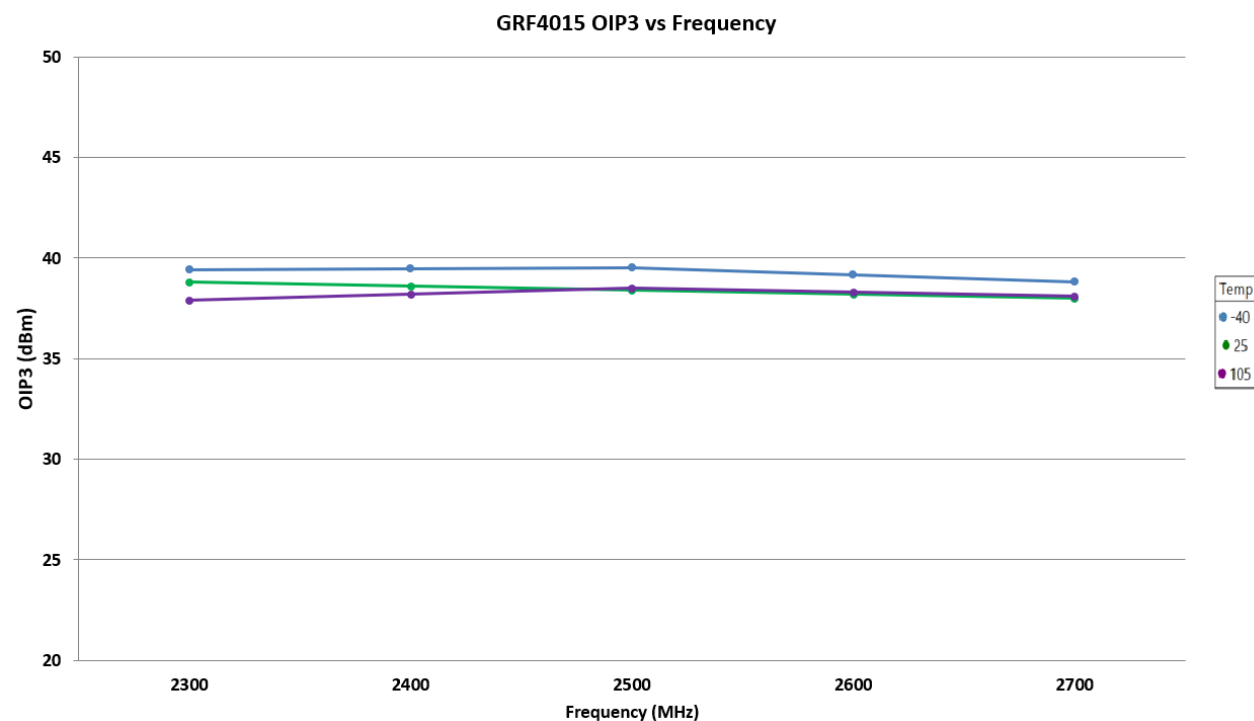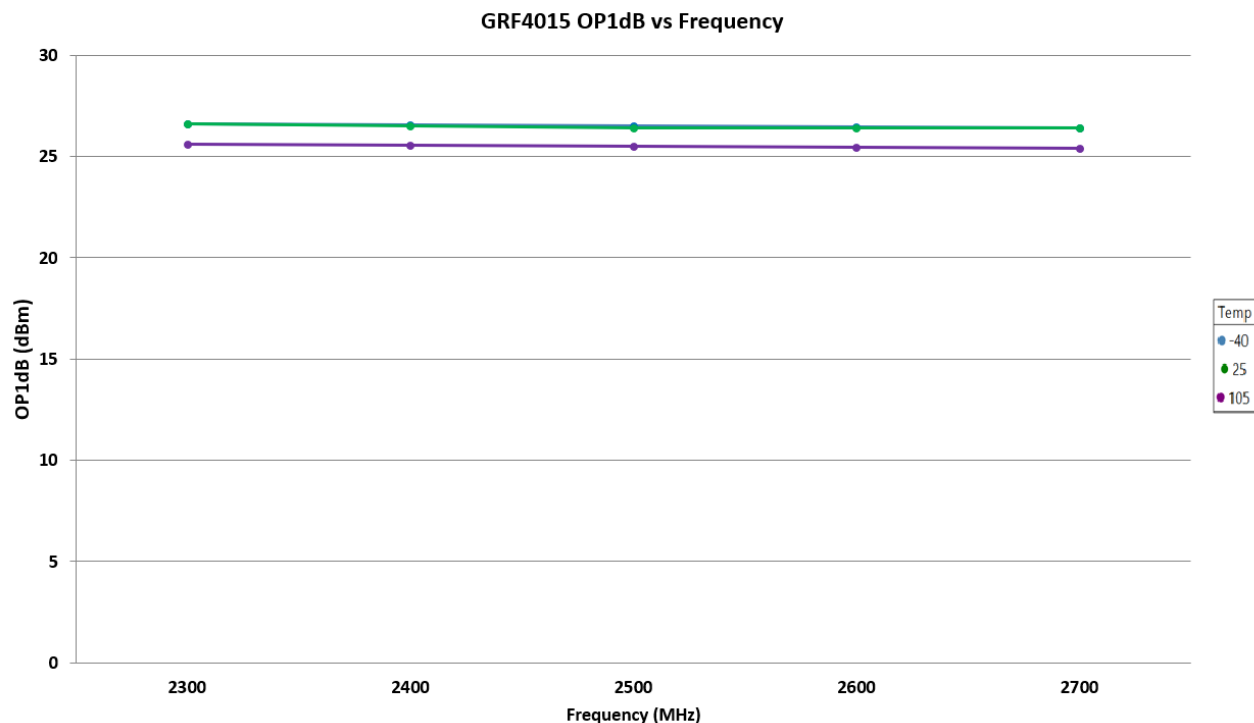


GRF4015 Typical Operating Curves: S-Parameters (2.3 to 2.7 GHz Tune)

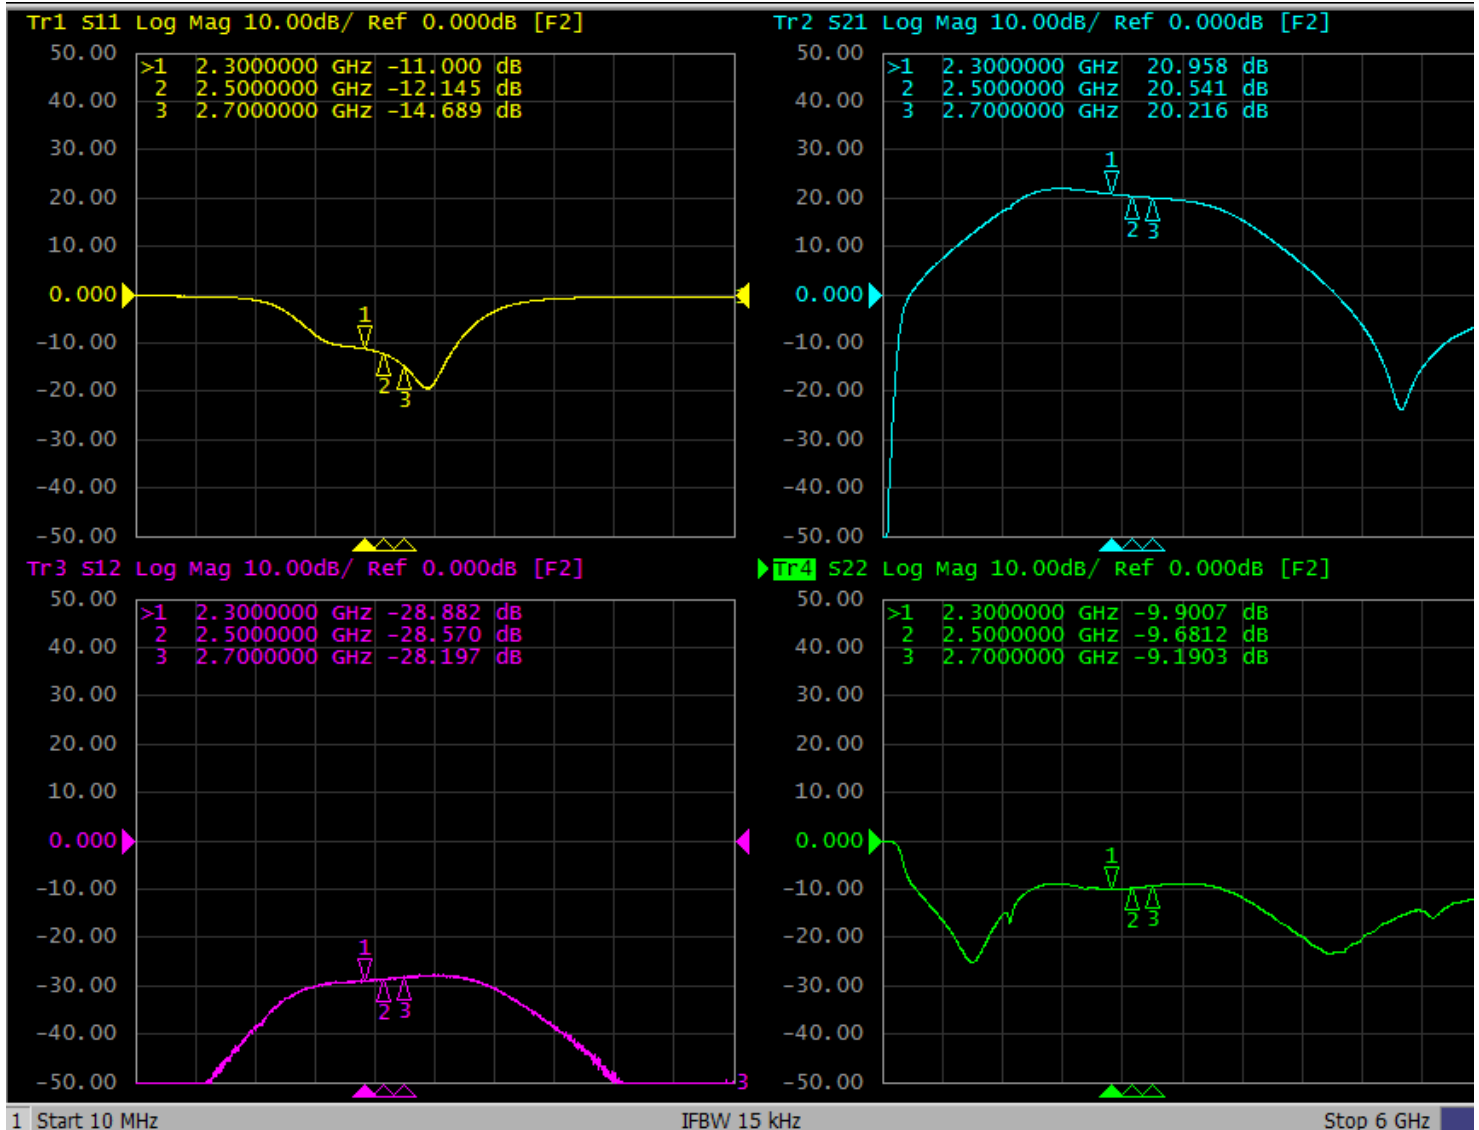


GRF4015 Typical Operating Curves: Stability Mu Factor (10 MHz to 20 GHz)

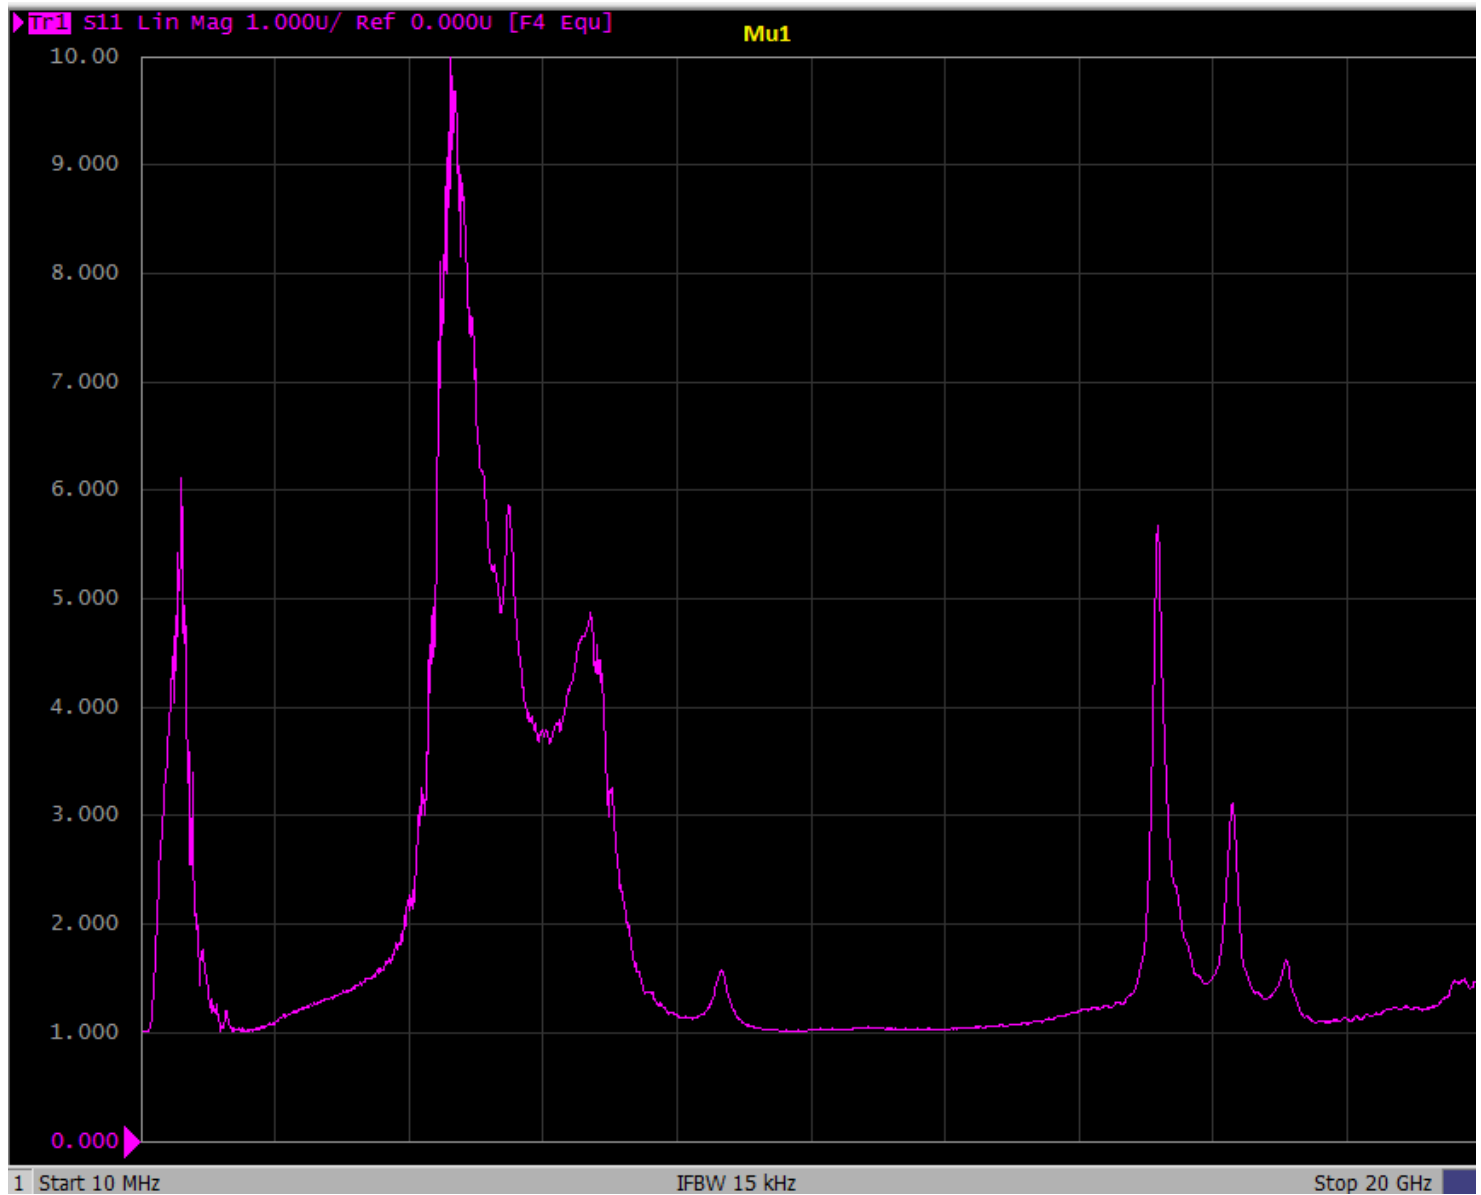

Note: $\text{Mu} \geq 1.0$ implies unconditional stability.

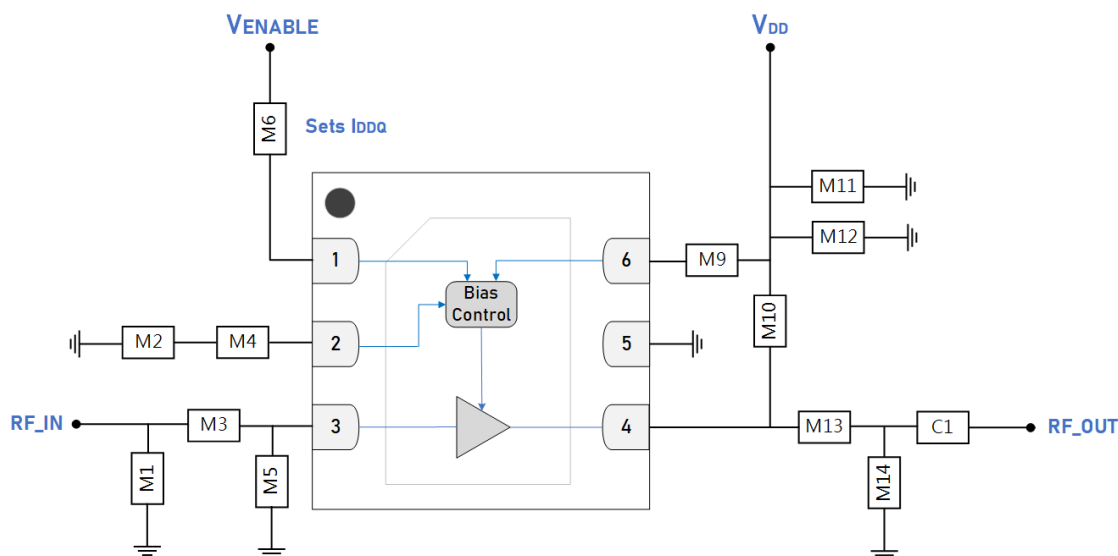




GRF4015 Standard Evaluation Board Schematic

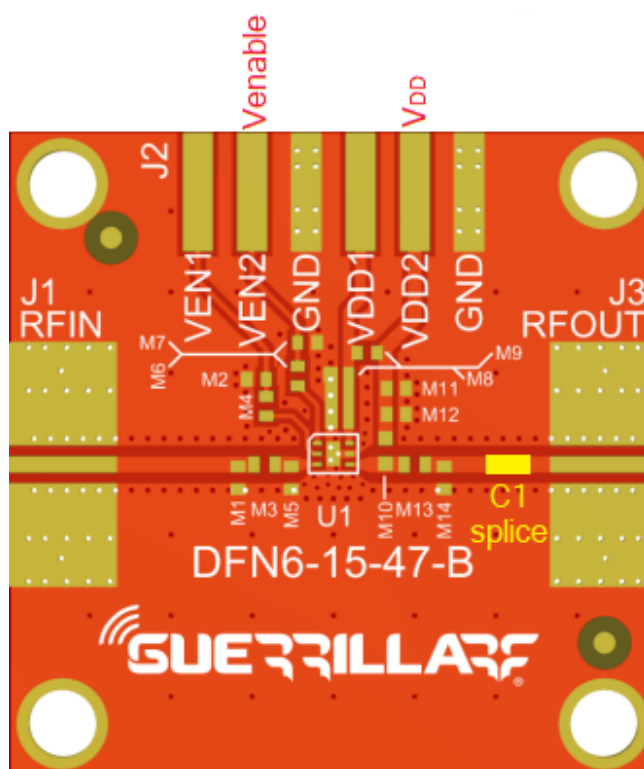


GRF4015 Evaluation Board Assembly Diagram

GRF4015 Evaluation Board Assembly Diagram Reference: 5 V, 2.3 to 2.7 GHz Tune

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQGWH	3.3 nH	0402	ok
M2	Resistor	Various	5%	50 Ω	0402	ok
M3	Capacitor	Murata	GJM	2.2 pF	0402	ok
M4	Resistor	Various	5%	0 Ω	0402	ok
M5	Capacitor	Murata	GJM	2.7 pF	0402	ok
M6	Resistor	Various	5%	300 Ω	0402	ok
M9	Resistor	Various	5%	500 Ω	0402	ok
M10	Inductor	Murata	LQGWH	15 nH	0402	ok
M11	Capacitor	Murata	GRM	10 μ F	0603	ok
M12	Capacitor	Murata	GRM	22 pF	0402	ok
M13	Resistor (jumper)	Various	5%	0 Ω	0402	ok
M14	Capacitor	Murata	GJM	0.5 pF	0402	ok
C1	Capacitor	Murata	GJM	15 pF	0402	ok
Evaluation Board	DFN6-15-47-B					

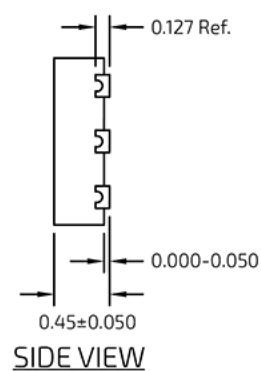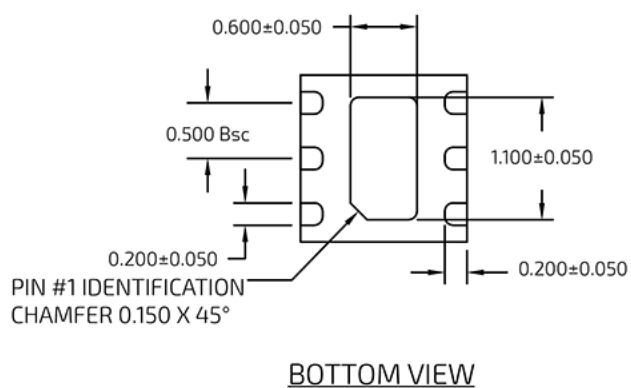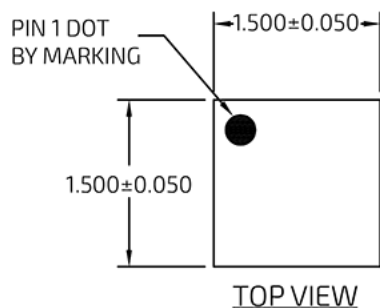

DFN 6 1.5x1.5mm Package Dimensions

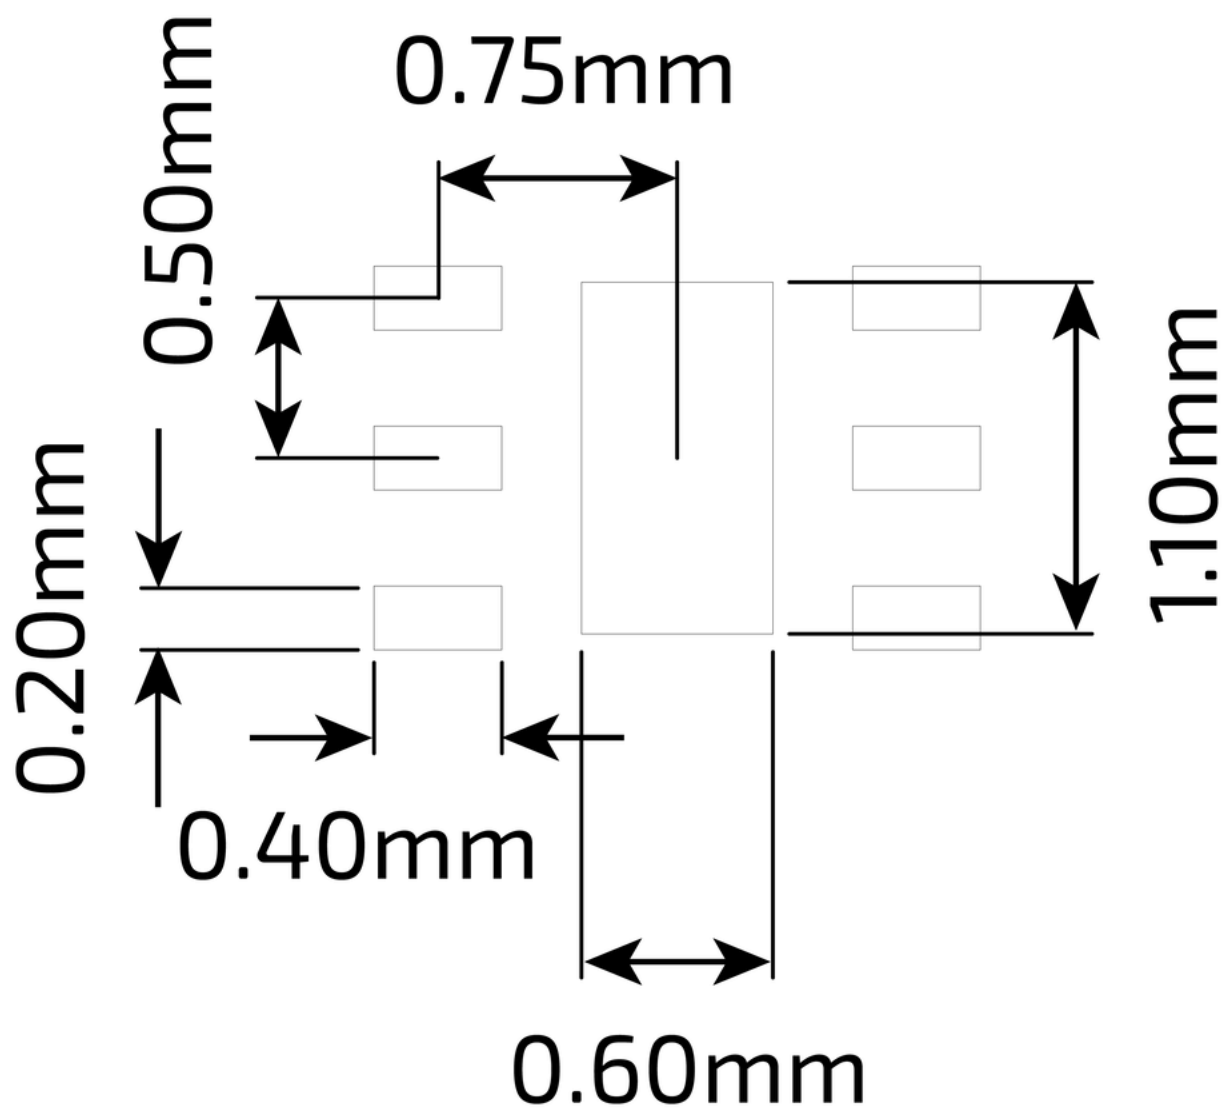

DFN 6 1.5x1.5mm Suggested PCB Footprint (Top View)


Package Marking Diagram




Line 1: "Y" = YEAR (single digit). "WW" = WORK WEEK the Device was assembled.
Line 2: "XXXX" = Device Part Number.

Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag, and the outside surface of the box. For the latest reel specifications and package information (including units/reel), please visit [Package Manufacturing Information](#) | [Guerrilla RF](#) (guerrilla-rf.com).

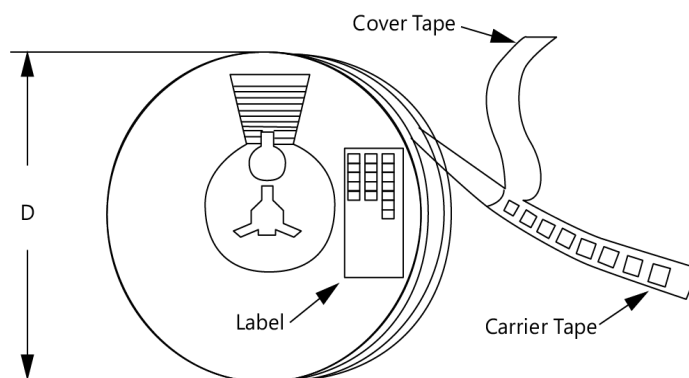

Tape and Reel Packaging with Reel Diameter Noted (D)

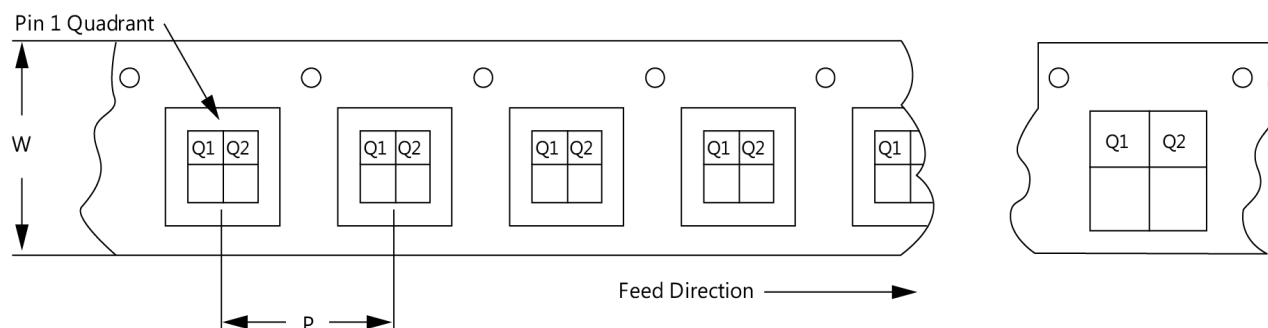

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information



Revision History

Revision Date	Description of Change
February 21, 2024	Advance Data Sheet.
April 10, 2024	Preliminary Data Sheet.
March 5, 2025	Release Ø Data Sheet.
April 30, 2025	Raised Maximum Operating Temperature from 105 to 115 °C. Added Maximum Dissipated Power at 105 and 115 °C.



Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the data sheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks, and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.