

# 承認書



## SPECIFICATION FOR APPROVAL

Version: REV.A1

客 戶

Customer : \_\_\_\_\_

客戶料號

44-70493

Customer's P/N : \_\_\_\_\_

品 名

493

Description : \_\_\_\_\_

出 貨 日 期

2013-01-25

Date &amp; Version : \_\_\_\_\_


| 出圖            |               |               | 承認                |
|---------------|---------------|---------------|-------------------|
| DRAWING       |               |               | CUSTOMER APPROVAL |
| 製表            | 審核            | 批准            |                   |
| Prepared By   | Checked By    | Approved By   |                   |
| Zhong Yu Hong | Wang Hai Long | Lu Xian Chuan |                   |
| DATE :        | 2013-01-21    |               | DATE:             |

# Specification

|                 |  |         |            |
|-----------------|--|---------|------------|
| 客 戶 Customer    |  | 型號 P/N  | 44-70493   |
| 用 途 Application |  | 日期 Date | 2013.01.21 |

1 ) Dimension: ( Unit : MM )

2 ) Connection :

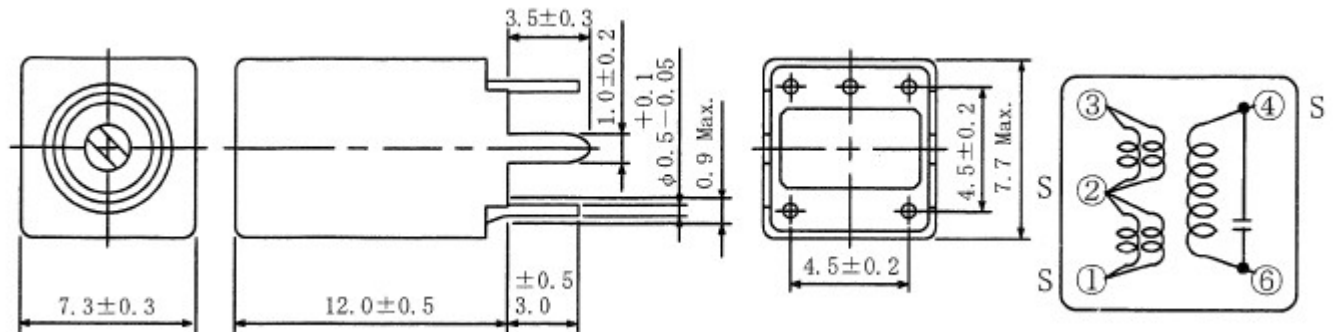

| Items      | N1         | N2   | N3  | N4 |
|------------|------------|------|-----|----|
| Winding    | 1-2        | 2-3  | 4-6 |    |
| Turns      | 2T*2       | 2T*2 | 12T |    |
| Wire(2UEW) | 2UEW φ0.10 |      |     |    |

3 ) Electric Characteristics :

| Frequency Variable                    | Unloaded(Q) | L location | Capacity(INT.) | Remark |
|---------------------------------------|-------------|------------|----------------|--------|
| 40.5MHz                               |             |            |                |        |
| F <sub>46</sub> : 40.5MHz±3%<br>(Min) | Q13≥50(Min) | 4-6        | 5Pf±5%         |        |

( 1 ) . Touque: 45-300g/CM

( 2 ) .Operation Temp: -25 +85 , Humidity: 25% 85%.

( 3 ) .Storage Temp:-40 +70 ; Humidity:45% 75%RH.

| DESIGNED BY | CHECKED BY    | APPROVED BY  |
|-------------|---------------|--------------|
| ShoYin Wang | XiaoDong Cian | ChoKai Chang |