

GRF9240

CATV and General Purpose Amplifier 5 to 2000 MHz

PRELIMINARY DATA SHEET

FEATURES

- 5 to 2000 MHz Operation
- Outstanding Noise Figure and Linearity
- Compact 3.0 x 3.0 mm QFN-16 Package
- Process: GaAs pHEMT

Reference: 5 V / 250 mA / 1218 MHz

- Gain: 18.6 dB
- OIP2L: 72 dBm
- OIP2H: 58 dBm
- OIP3: 41 dBm
- OP1dB: 24.3 dBm
- Evaluation Board Noise Figure: 2.4 dB

APPLICATIONS

- Cable, Terrestrial, and Satellite
- DOCSIS
- CATV, Cable Modem and Set Top Box
- General Purpose Gain Block

ORDERING INFORMATION


Buy it Now


DESCRIPTION

The GRF9240 is a broadband, linear, dual/balanced gain block designed for use in 75 Ω CATV and 50 Ω general purpose applications.

Please consult with the GRF applications engineering team for application notes and custom tuning/evaluation board data. De-embedded S-Parameters are available on the website.

BLOCK DIAGRAM

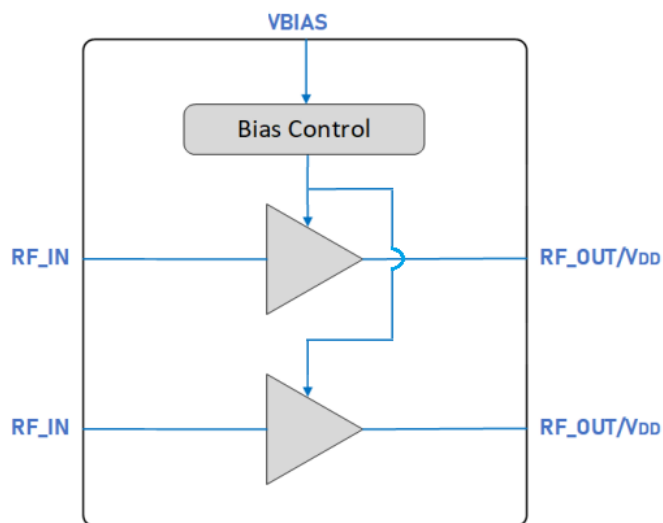

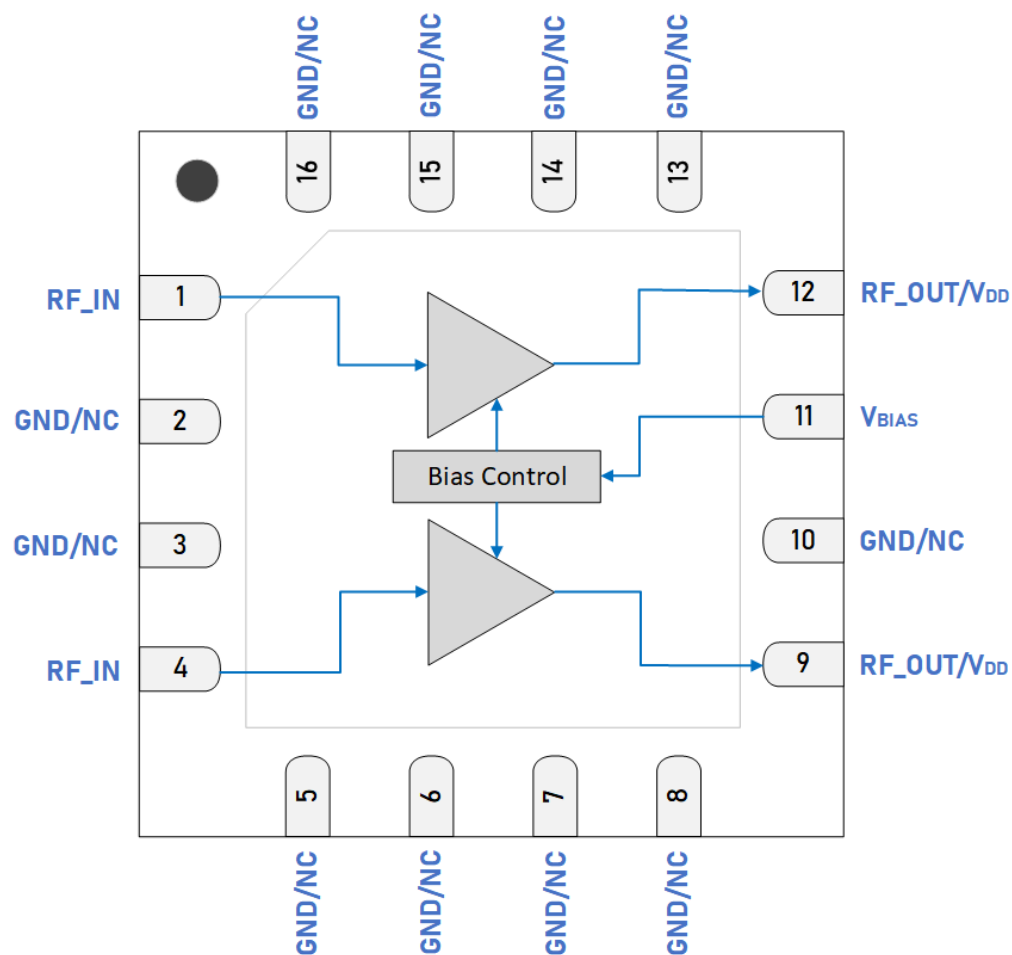

Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
1, 4	RF_IN	RF Input	External match must provide DC Block.
9, 12	RF_OUT/V _{DD}	RF Output	Provides device V _{DD} via external bias inductor/ferrite. DC block required at evaluation board output.
11	V _{BIAS}	Bias Voltage	Applied through series resistor.
2, 3, 5, 6, 7, 8, 10, 13, 14, 15, 16	GND/NC	Ground or No Connect	No internal connection to die. We recommend connecting these pins to ground.
PKG BASE	GND	Ground	Provides DC and RF ground as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V_{DD}	0	5.25	V
RF Input Power: Load VSWR < 2:1, $V_{DD} = 5$ V.	$P_{in\ Max}$		TBD	dBm
Operating Temperature (Package Base)	$T_{PKG\ BASE}$	-40	85	°C
Maximum Channel Temperature (MTTF > 10^6 Hours)	T_{MAX}		170	°C
Maximum Dissipated Power	$P_{DISS\ MAX}$		TBD	mW
Electrostatic Discharge				
Charged Device Model	CDM	TBD		V
Human Body Model	HBM	TBD		V
Storage				
Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--



Caution! ESD Sensitive Device.

Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 - Packaging and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging. For additional information, please refer to the [Certificate of RoHS Compliance](#).



Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V _{DD}	3	5	5.25	V	
Operating Temperature Range	T _{PKG BASE}	-40		85	°C	
RF Frequency Range	F _{RF}	5	1218	2000	MHz	Typical application schematic with external matching components (notes 1 & 2).
RF_IN Port Impedance	Z _{RFIN}		75		Ω	Single-ended.
RF_OUT Port Impedance	Z _{RFOUT}		75		Ω	Single-ended.

Note 1: Operation outside of this range is possible but with degraded performance of some parameters.

Note 2: Contact the Guerrilla RF applications team for guidance on optimizing the tuning of the device for alternative bands.



Nominal Operating Parameters - General

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current	I _{DD}		250		mA	
Thermal Data						
Thermal Resistance (Infrared Scan)	Θ _{JC}		TBD		°C/W	On standard evaluation board (note 3).



Note 3: MTTF > 10⁶ hours for T_j ≤ 170 °C

Nominal Operating Parameters - RF



Typical Application Schematic: $V_{DD} = 5\text{ V}$, $I_{DD} = 250\text{ mA}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Gain	S21		17.7		dB	50 MHz
			18.6		dB	1218 MHz
			18.7		dB	1800 MHz
S-Parameters	S11		< -18		dB	50 - 1800 MHz
	S12		< -21.5		dB	50 - 1800 MHz
	S22		< -18		dB	50 - 1800 MHz
Noise Figure	NF		1.7		dB	50 MHz (evaluation board F to F)
			2.4		dB	1218 MHz (evaluation board F to F)
			3		dB	1800 MHz (evaluation board F to F)
Output 2nd Order Intercept Point Low	OIP2L		86		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 50 MHz
			72		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 1218 MHz
			88		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 1800 MHz
Output 2nd Order Intercept Point High	OIP2H		86		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 50 MHz
			58		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 1218 MHz
			56		dBm	+12 dBm P_{OUT} per tone. 30 MHz spacing at 1800 MHz
Output 3rd Order Intercept Point	OIP3		42.5		dBm	+12 dBm P_{OUT} per tone. 6 MHz spacing at 50 MHz
			41		dBm	+12 dBm P_{OUT} per tone. 6 MHz spacing at 1218 MHz
			39.2		dBm	+12 dBm P_{OUT} per tone. 6 MHz spacing at 1800 MHz
Output 1dB Compression Power	OP1dB		25.6		dBm	50 MHz
			24.3		dBm	1218 MHz
			23.7		dBm	1800 MHz



GRF9240 Typical Operating Curves: 5 V, 5 to 1800 MHz Tune

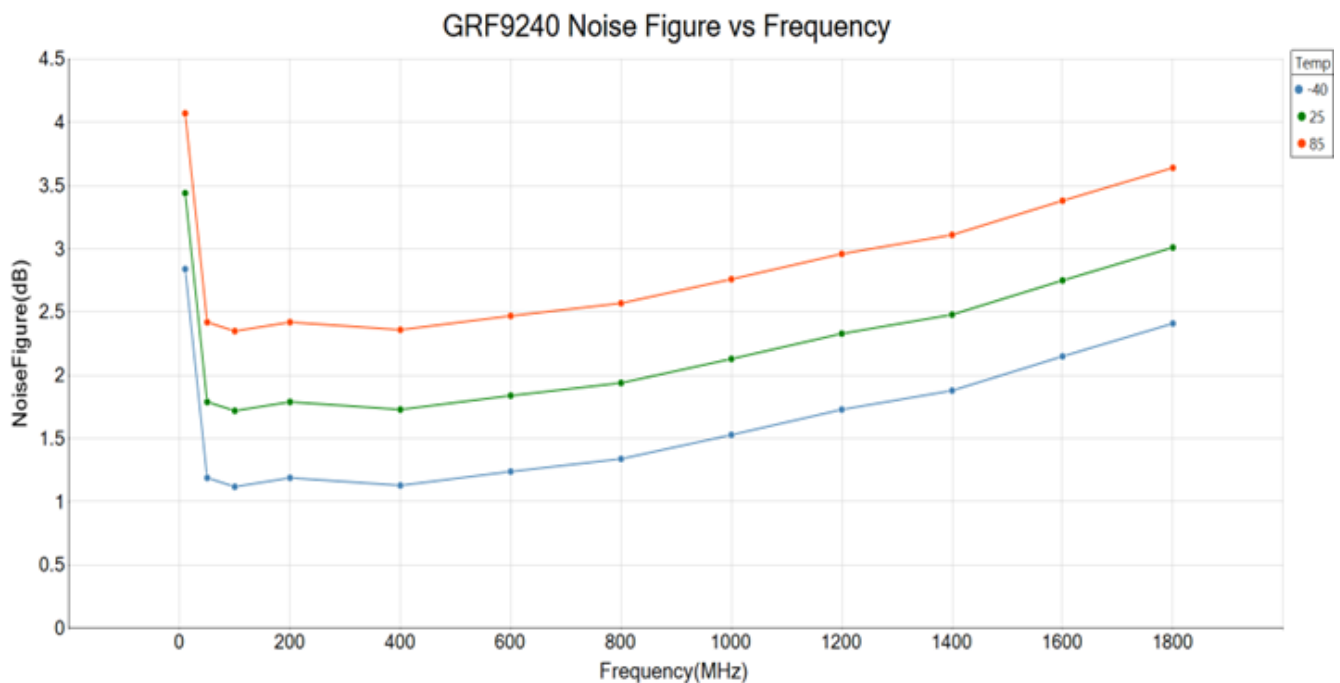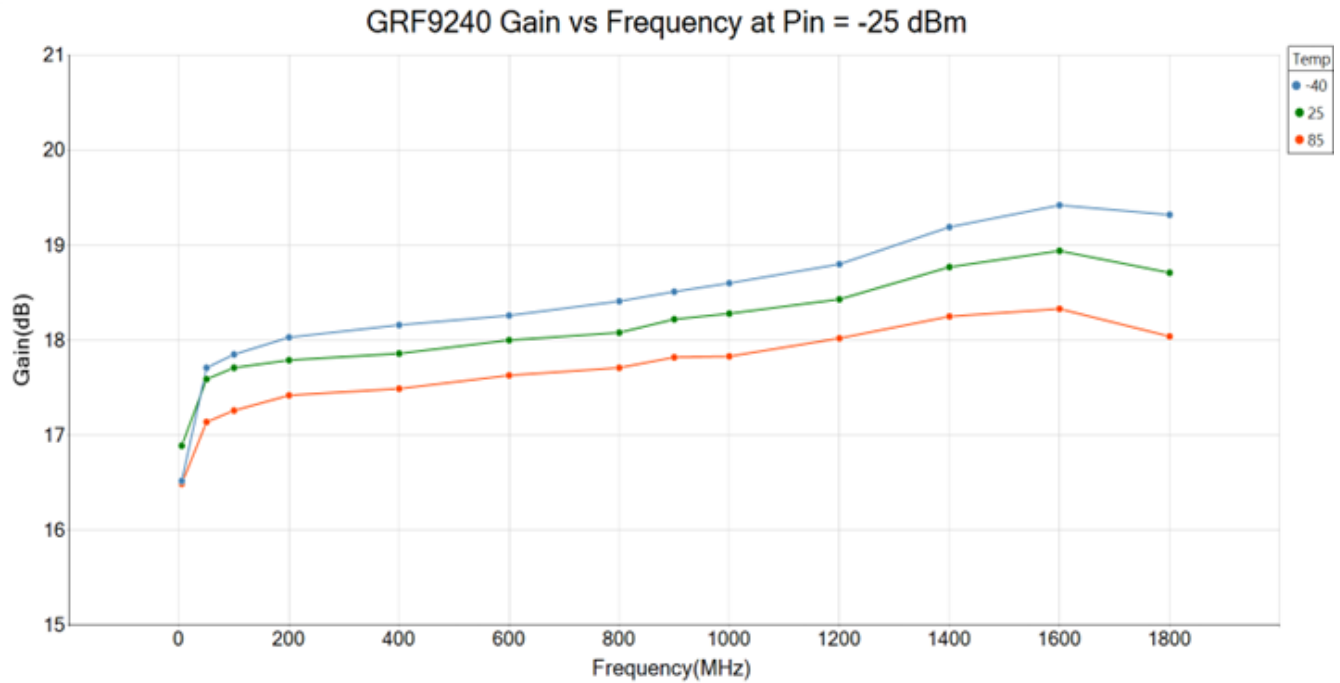


GRF9240 Typical Operating Curves: 5 V, 5 to 1800 MHz Tune

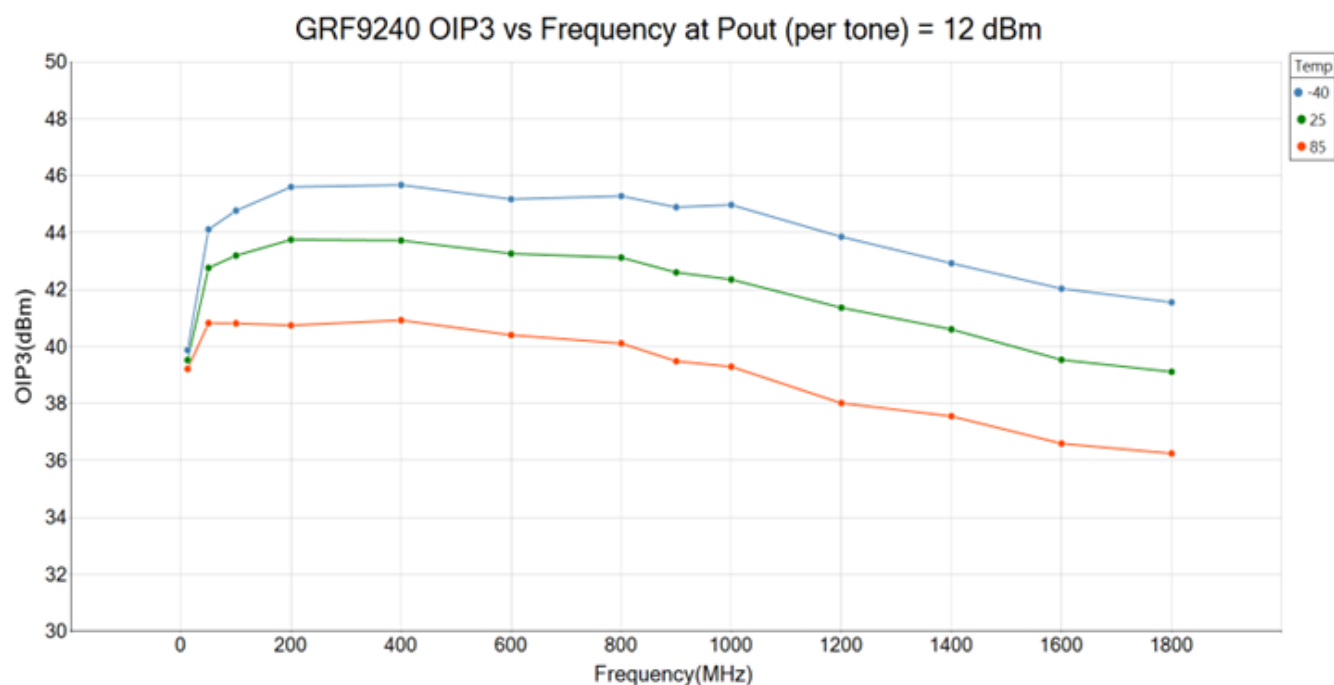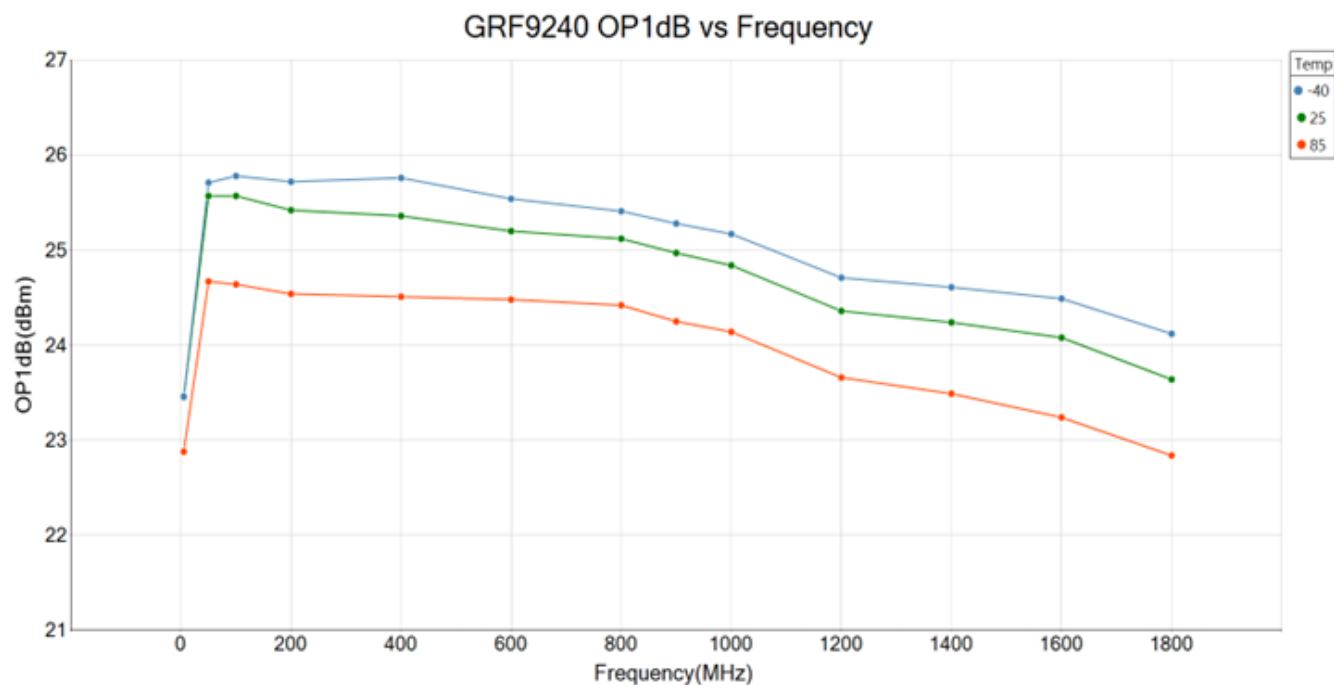


GRF9240 Typical Operating Curves: 5 V, 5 to 1800 MHz Tune

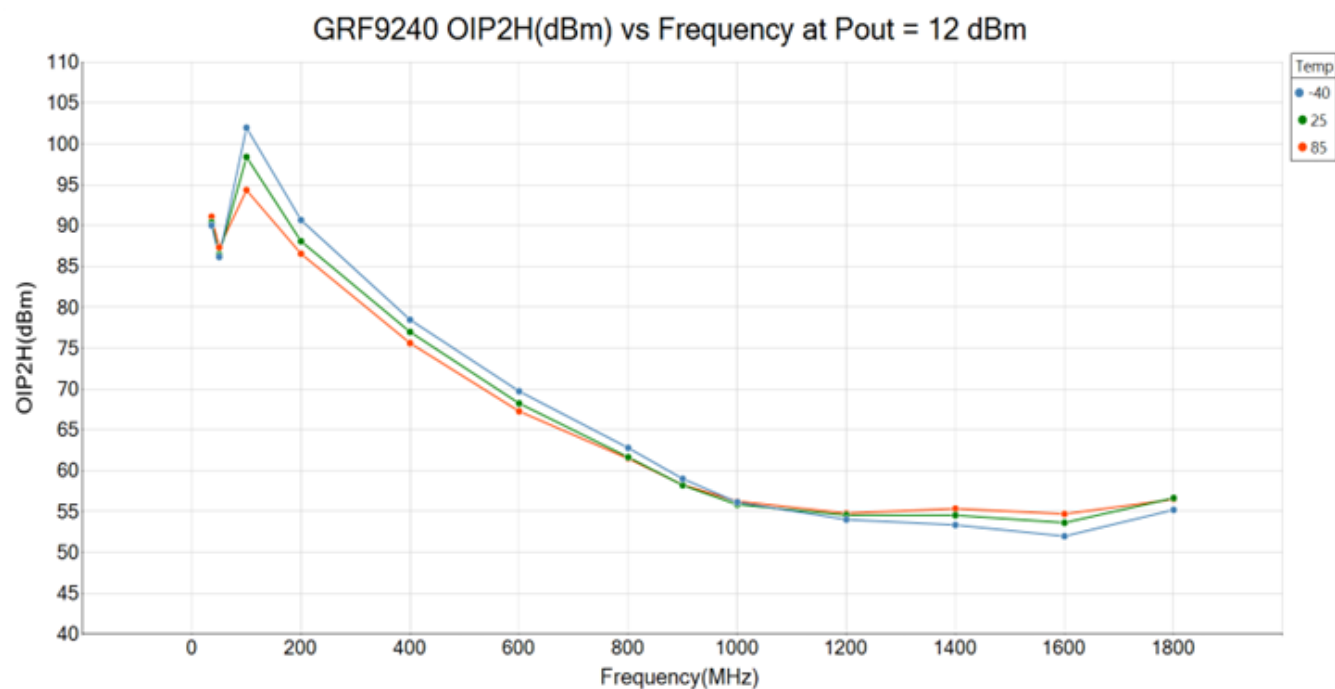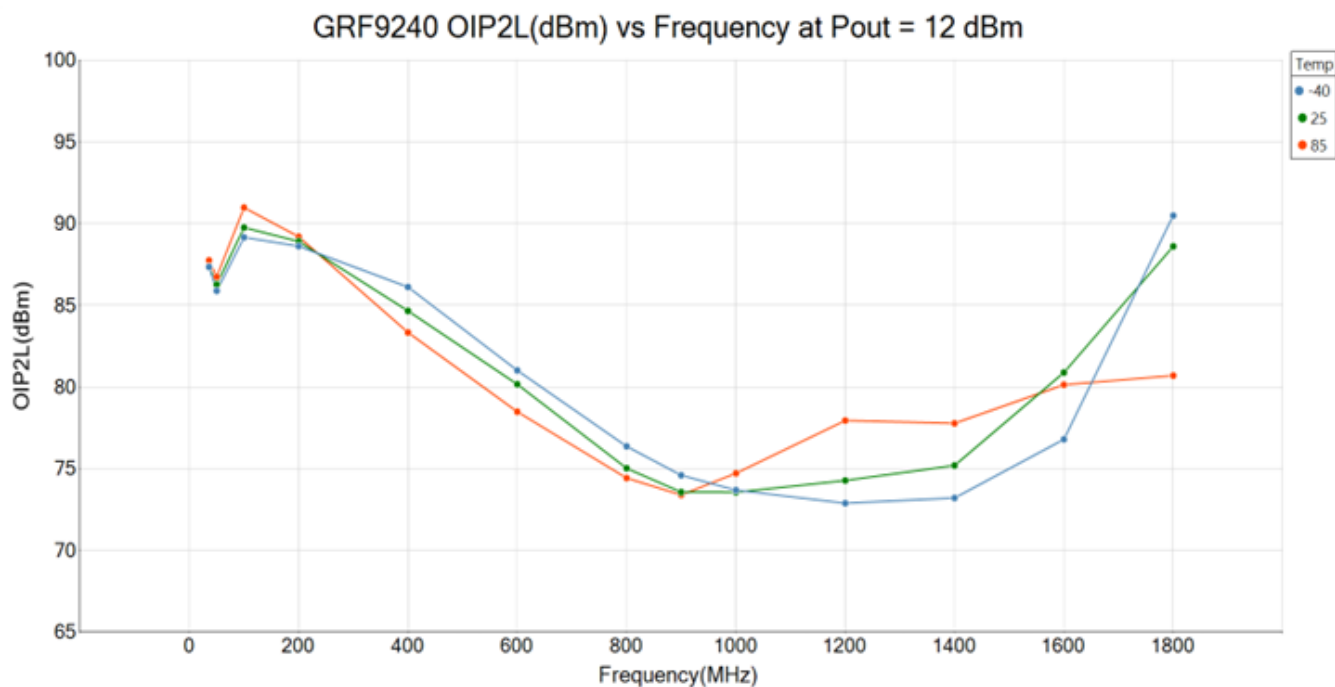


GRF9240 Typical Operating Curves: S-Parameters (1 to 3000 MHz in 75 Ω System)

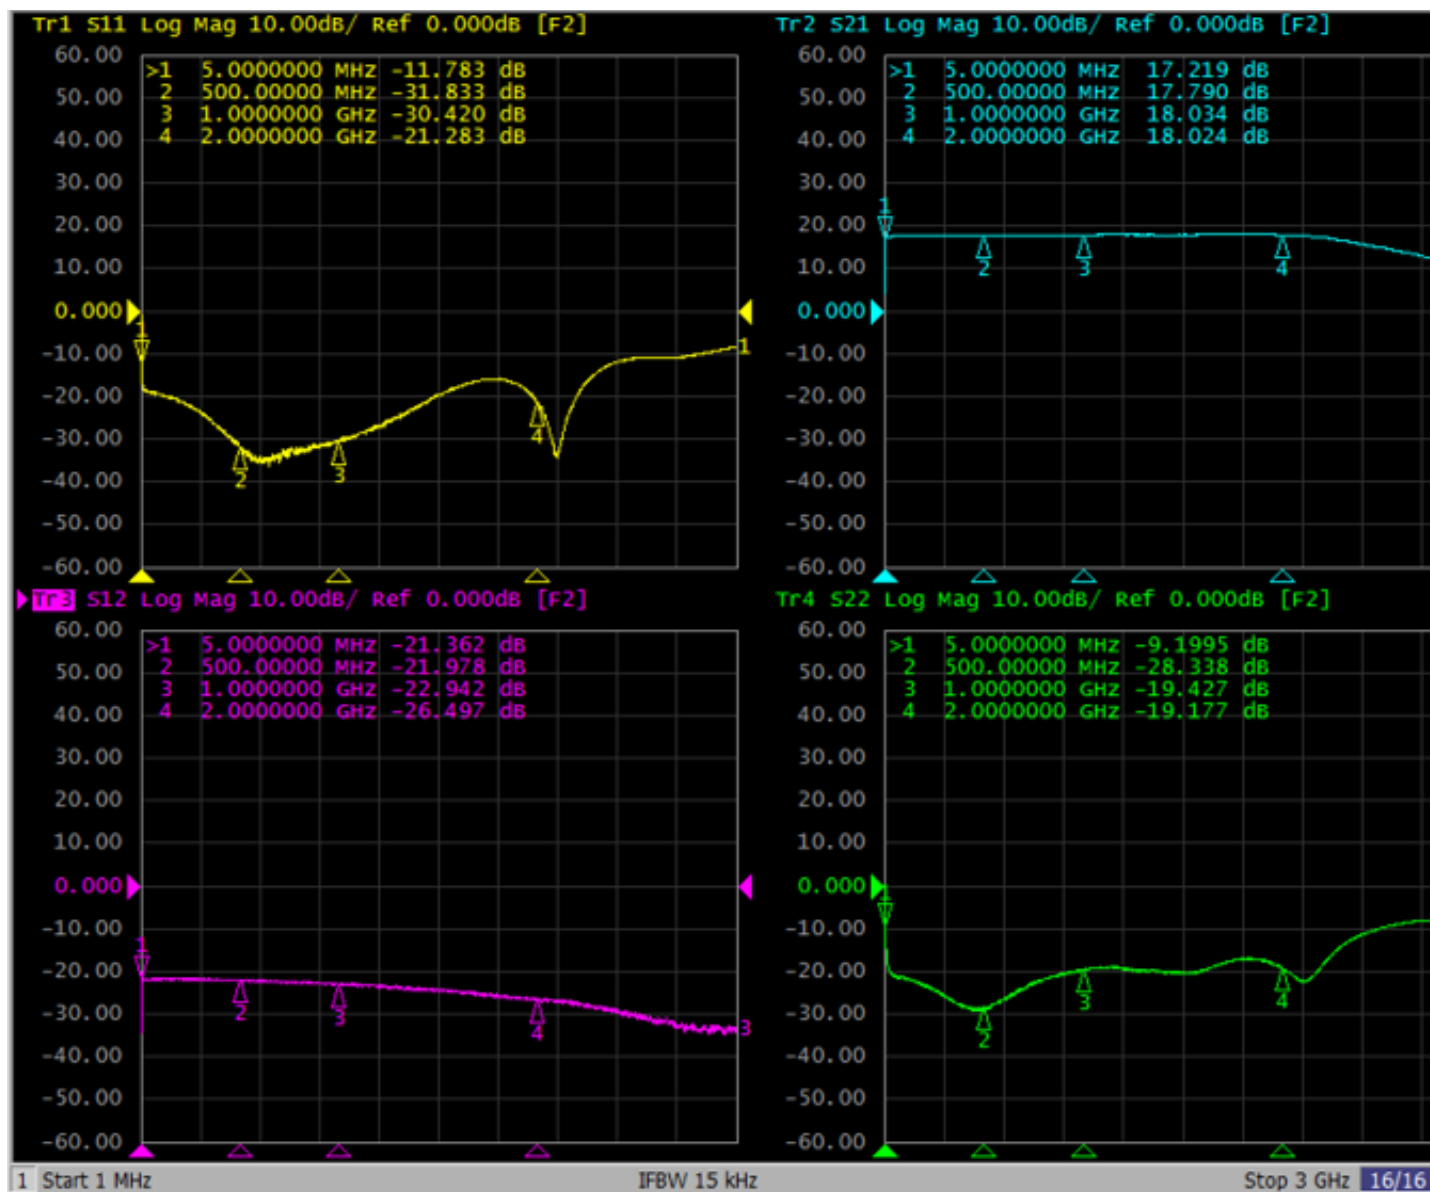


GRF9240 Typical Operating Curves: Stability Mu Factor (1 to 3000 MHz in 75 Ω System)

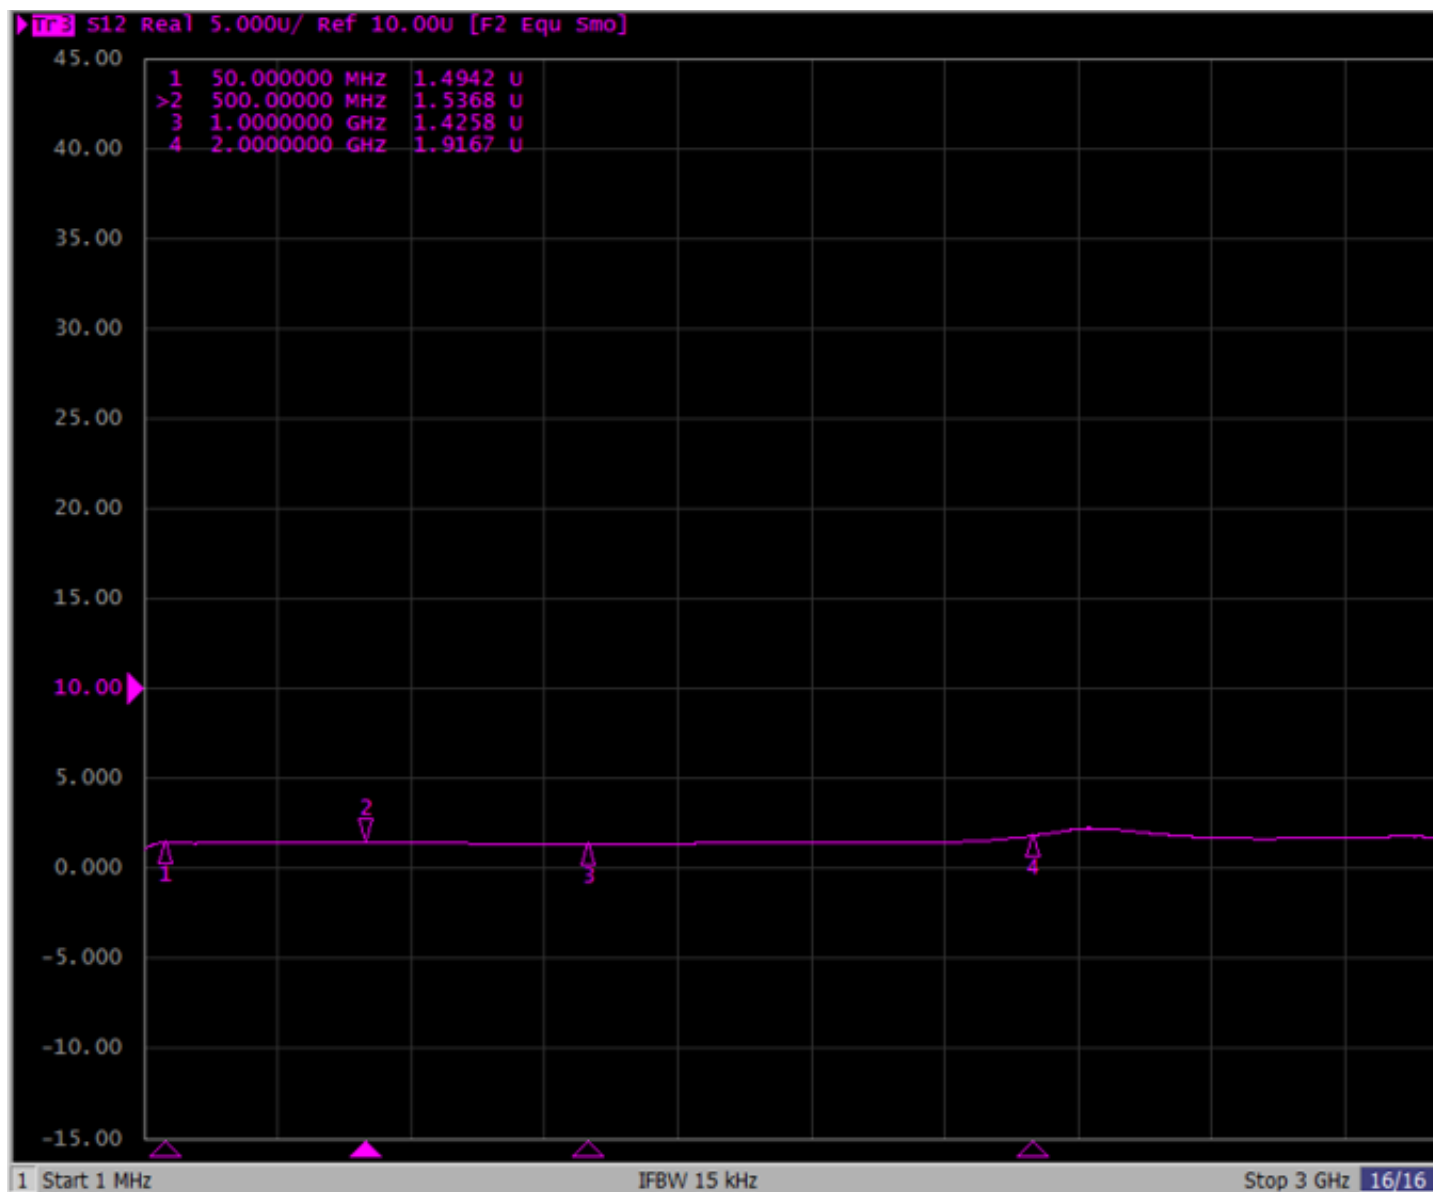

Note: Mu factor ≥ 1.0 implies unconditional stability.

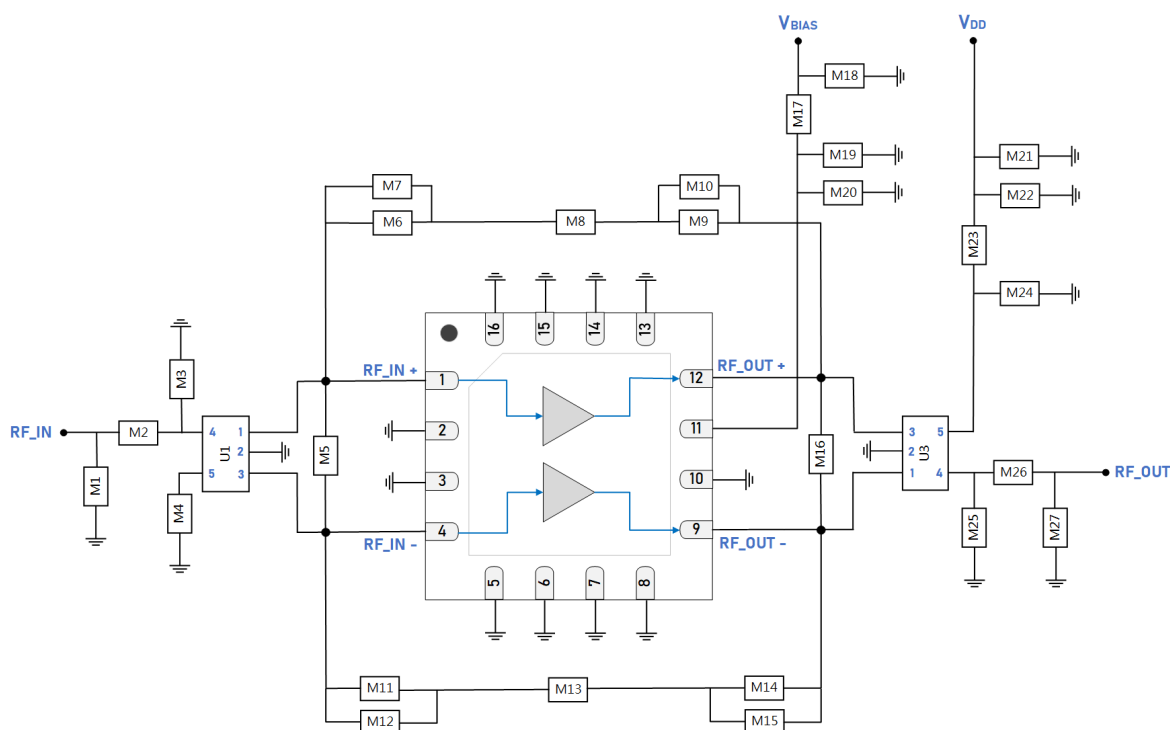



GRF9240 Standard Evaluation Board Schematic

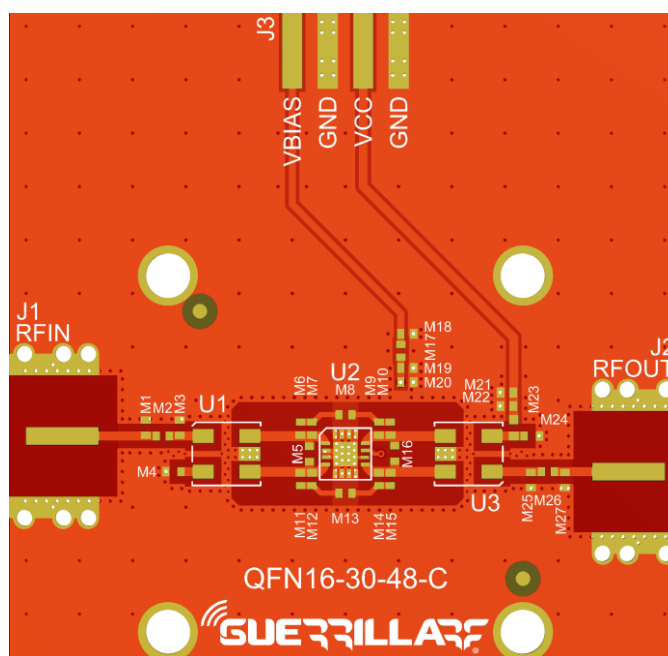


GRF9240 Evaluation Board Assembly

GRF9240 Evaluation Board Assembly Diagram Reference: 5 to 1800 MHz Tune

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1, M3, M5, M10, M15, M16, M19, M20, M25, M27	DNP					
M2, M4, M8, M13, M18, M21, M24, M26	Capacitor	Murata	GRM	0.1 μ F	0402	ok
M6, M11	Resistor	Various	N/A	82 Ω	0402	ok
M7, M12	Inductor	Murata	LQG15WH	27 nH	0402	ok
M9, M14	Resistor	Various	N/A	475 Ω	0402	ok
M17	Resistor	Various	N/A	22 k Ω	0402	ok
M22	Capacitor	Murata	GRM	1000 pF	0402	ok
M23	Ferrite	Murata	BLM15PX601SZ1	N/A	0402	no
U1, U3	Balun	MiniRF	MRFX0837	N/A	N/A	no
Evaluation Board	QFN16-30-48-C					

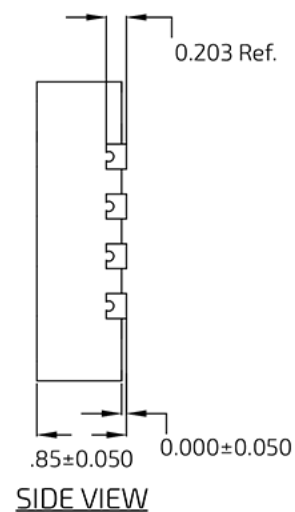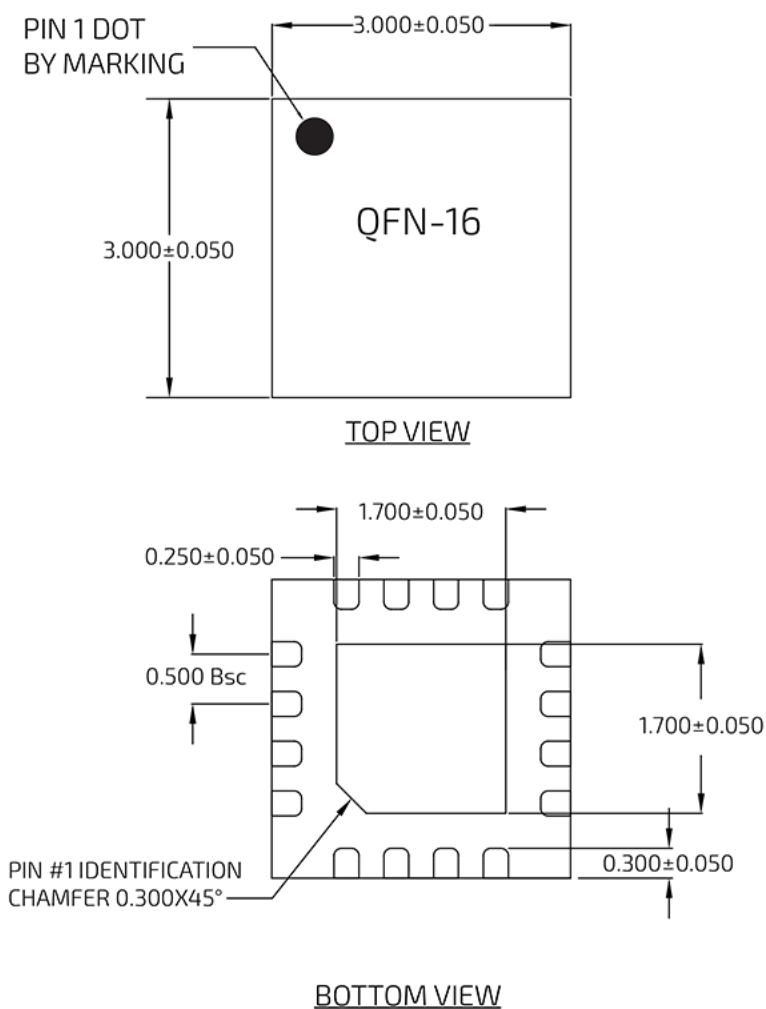

QFN 16 3x3mm Package Dimensions

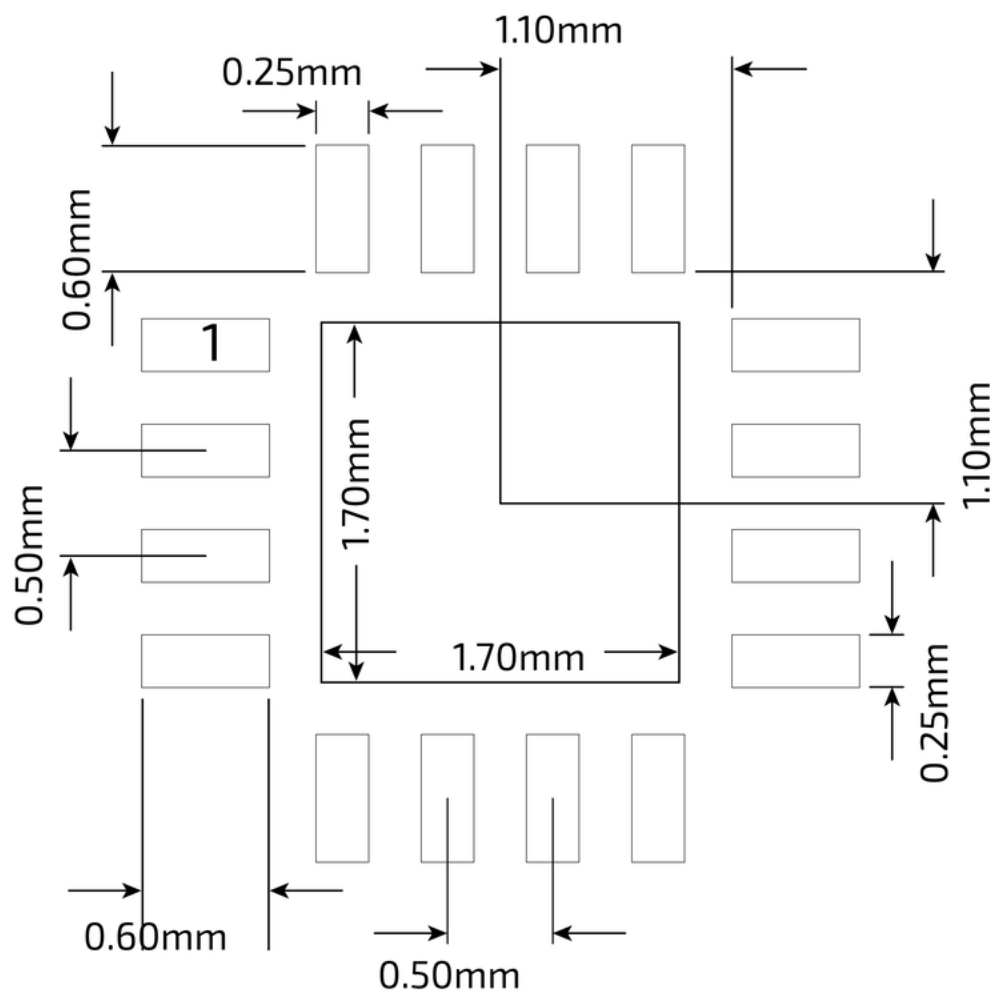

QFN 16 3x3mm Suggested PCB Footprint (Top View)


Package Marking Diagram




Line 1: "YY" = Year. "WW" = WORK WEEK the Device was assembled.
 Line 2: "GRF" = Guerrilla RF
 Line 3: "XXXX" = Device Part Number.

Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag, and the outside surface of the box. For the latest reel specifications and package information (including units/reel), please visit [Package Manufacturing Information](#) | [Guerrilla RF](#) (guerrilla-rf.com).

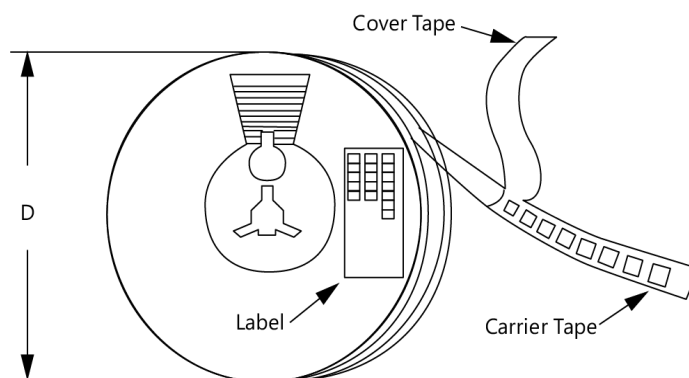

Tape and Reel Packaging with Reel Diameter Noted (D)

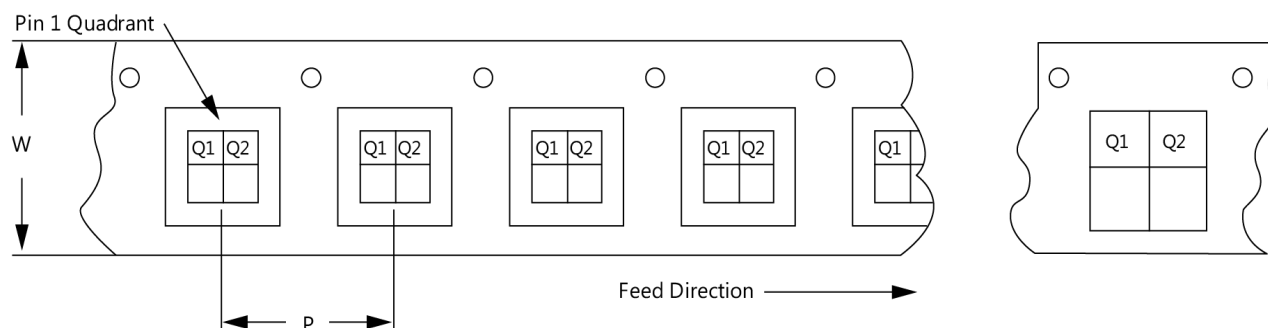

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information



Revision History

Revision Date	Description of Change
March 12, 2024	Advance Data Sheet.
October 3, 2024	Preliminary Data Sheet.



Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the data sheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks, and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.