


The NDR303.825 is a true one-port, surface-acoustic-wave (**SAW**) resonator in a low-profile **TO-39** case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at **303.825 MHz**.

## 1.Package Dimension (TO-39)



Pin	Connection
1	Terminal1
2	Terminal2
3	Case Ground


	Data (unit: mm)
A	9.30±0.20
B	5.08±0.10
C	3.40±0.20
D	3±0.20 / 5±0.20
E	0.45±0.20

## 2.Marking

**NDR303.825**


Color: Black or Blue

## 3.Equivalent LC Model and Test Circuit

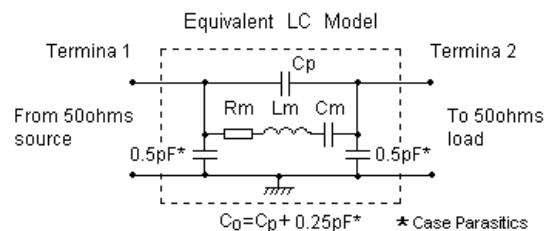


## 4.Typical Application Circuit


### 1) Telecontrol Circuitry




### 2) Local Oscillator Application



## 5.Typical Frequency Response

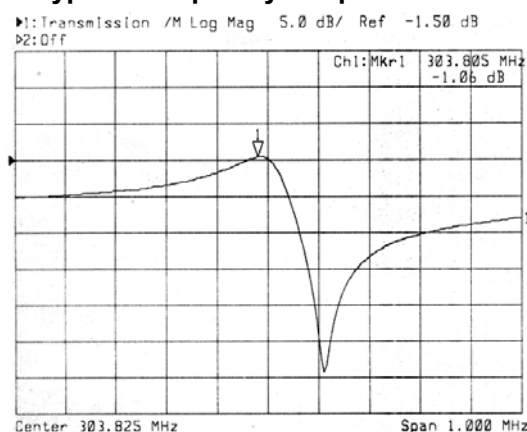

## 6.Temperature Characteristics

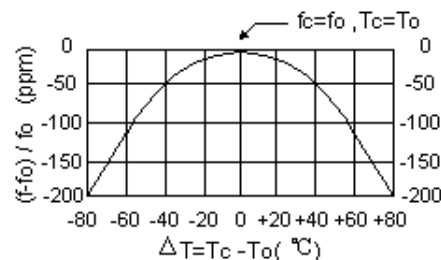

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.

## 7.Performance

### 7-1.Maximum Rating

Rating	Value	Units
CW RF Power Dissipation	+10	dBm
DC Voltage Between Any Two Pins	$\pm 30V$	VDC
Case Temperature	-40 to +85	$^{\circ}C$

### 7-2.Electronic Characteristics

Characteristic		Sym	Minimum	Typical	Maximum	Units
Center Frequency (+25 $^{\circ}C$ )	Absolute Frequency	$f_c$	303.750		303.900	MHz
	Tolerance from 303.825 MHz	$\Delta f_c$		$\pm 75$		KHz
Insertion Loss		IL		1.2	1.8	dB
Quality Factor	Unloaded Q	$Q_U$		13,800		
	50 $\Omega$ Loaded Q	$Q_L$		1800		
Temperature Stability	Turnover Temperature	$T_O$	25	40	55	$^{\circ}C$
	Turnover Frequency	$f_O$		$f_c$		KHz
	Frequency Temperature Coefficient	FTC		0.037		ppm/ $^{\circ}C^2$
Frequency Aging	Absolute Value during the First Year	$ f_A $		$\leq 10$		ppm/yr
DC Insulation Resistance Between Any Two Pins			1.0			M $\Omega$
RF Equivalent RLC Model	Motional Resistance	$R_M$		15	23	$\Omega$
	Motional Inductance	$L_M$		109.010		$\mu H$
	Motional Capacitance	$C_M$		2.5319		fF
	Pin 1 to Pin 2 Static Capacitance	$C_O$		2.5		pF

☺ **CAUTION: Electrostatic Sensitive Device. Observe precautions for handling !**

### NOTES:

- Frequency aging is the change in  $f_c$  with time and is specified at +65 $^{\circ}C$  or less. Aging may exceed the specification for prolonged temperatures above +65 $^{\circ}C$ . Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- The center frequency,  $f_c$ , is the frequency of minimum IL with the resonator in the specified test fixture in a 50  $\Omega$  test system with VSWR  $\leq 1.2$  : 1. Typically,  $f_{oscillator}$  or  $f_{transmitter}$  is less than the resonator  $f_c$ .
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Unless noted otherwise, case temperature  $T_C = +25^{\circ}C \pm 2^{\circ}C$ .
- The design, manufacturing process, and specifications of this device are subject to change without notice.
- Derived mathematically from one or more of the following directly measured parameters:  $f_c$ , IL, 3 dB bandwidth,  $f_c$  versus  $T_C$ , and  $C_O$ .
- Turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_O$ . The nominal center frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ . Typically, oscillator  $T_O$  is 20 $^{\circ}C$  less than the specified resonator  $T_O$ .
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_O$  is the measured static (nonmotional) capacitance between either pin 1 and ground or pin 2 and ground. The measurement includes case parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25 pF to  $C_O$ .