

GRF5219

HIGH GAIN LINEAR DRIVER

1.8 to 2.2 GHz

PRELIMINARY DATA SHEET

FEATURES

- Gain Flatness < 1 dB
- Excellent Linearity Performance Over Wide Bandwidths
- Flexible Biasing Provides Latitude for Linearity Optimization
- 109 mA Native Mode Quiescent Current Consumption
- 50 Ω Single-ended Input and Output Impedances
- -40 to 115 $^{\circ}$ C Operating Temperature Range
- Compact 3 x 3 mm QFN-16 Package

Reference: 5 V / 109 mA / 2 GHz

- Gain: 44.1 dB
- OP1dB: 30 dBm
- OIP3: 33.8 dBm
- NF: 4.1 dB

APPLICATIONS

- Linear Driver / Pre-Driver Amplifiers
- 5G Sub-6 GHz Massive MIMO Base Stations
- Small Cells and Cellular Repeaters
- Millimeter Wave IF Stages
- High-Performance RF Infrastructure



ORDERING INFORMATION

Buy it Now

DESCRIPTION


The GRF5219 is a high-gain, three-stage driver amplifier targeting 1.8 to 2.2 GHz wireless infrastructure applications. The device delivers up to 30 dBm of OP1dB, 33.8 dBm of OIP3, and a low noise figure (NF) of less than 4.1 dB over its targeted band of operation.


For optimal efficiency and linearity, the amplifier was designed to operate with a single 5 V supply voltage while using only 85-109 mA of quiescent current. 3.3 V supplies can also be used while still yielding 26.7 dBm of OP1dB. If desired, I_{CCQ} can be increased beyond the native biasing point for enhanced linearity performance.

The GRF5219 is designed for 50 Ω systems, typically needing only a two-element shunt-series match on the output port.

Additional tunes can be found on the GRF5219 "Custom Tunes" product page: [GRF5219 Custom Tunes](#)

BLOCK DIAGRAM

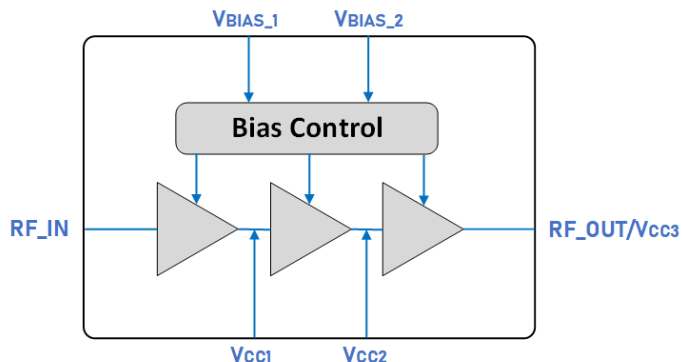

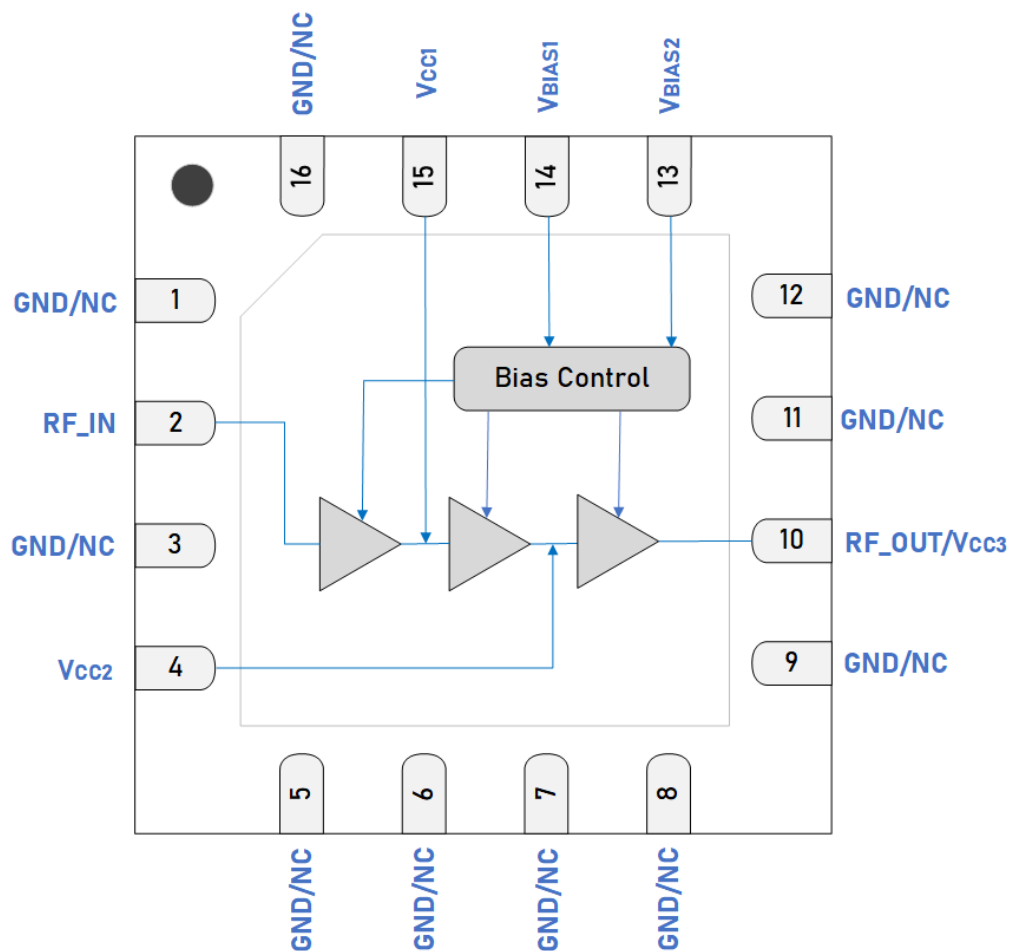

Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
2	RF_IN	RF Input	The RF input is fully matched to 50Ω, and it contains internal DC blocking capacitor.
1, 3, 5, 6, 7, 8, 9, 11, 12, 16	GND/NC	Ground or No Connect	No internal connection. These pins can be left unconnected, or be connected to the ground (recommended). Use a via as close to the pin as possible if grounded.
4	V _{CC2}	V _{CC} Bias Voltage	Pull up to V _{CC} through inductor and use bypass capacitors as close to the pin as possible. In addition to supplying the device with a DC voltage, there is also an RF signal present.
10	RF_OUT/V _{CC3}	RF Output/V _{CC3} Bias Voltage	V _{CC} must be applied through a choke to this pin.
13	V _{BIAS2}	Second Bias Set	Connect via resistor to a common V _{CC} . V _{BIAS2} and series resistor sets I _{CCQ3} . Setting V _{BIAS2} ≤ 0.2 V will disable the final stage of the device.
14	V _{BIAS1}	First Bias Set	Connect via resistor to a common V _{CC} . V _{BIAS1} and series resistor set I _{CCQ1} and I _{CCQ2} . Setting V _{BIAS1} ≤ 0.2 V will disable the 1st and 2nd stage of the device.
15	V _{CC1}	V _{CC} Bias Voltage	Connect to a common V _{CC} . Place bypass capacitors as close to the pin as possible.
PKG BASE	GND	Ground	Provides DC and RF ground for the amplifier, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on the schematic page.

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V_{CC}	3	5.5	V
RF Input Power: Load VSWR $\leq 2:1$, all phase angles, $V_{CC} = 5$ V, CW Tone, 100% Duty Cycle, $T_{PKG\ BASE} = -40$ to 115 °C	$P_{IN\ MAX}$		21	dBm
Operating Temperature (Package Base)	$T_{PKG\ BASE}$	-40	115	°C
Maximum Channel Temperature (MTTF > 10^6 Hours)	T_{MAX}		190	°C
Maximum Dissipated Power Stage 1 (DC only, no RF applied)	$P_{DISS\ MAX}$		TBD	mW
Maximum Dissipated Power Stage 2 (DC only, no RF applied)	$P_{DISS\ MAX}$		TBD	mW
Maximum Dissipated Power Stage 3 (DC only, no RF applied)	$P_{DISS\ MAX}$		TBD	mW
Electrostatic Discharge				
Human Body Model	HBM	TBD		V
Charged Device Model	CDM	TBD		V
Storage				
Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--



Caution! ESD Sensitive Device.

Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 - Packaging and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging. For additional information, please refer to the [Certificate of RoHS Compliance](#).

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V_{CC}	3	5	5.5	V	
Operating Temperature (Package Base)	$T_{PKG\ BASE}$	-40		115	°C	
RF Frequency Range	F_{RF}	1.8		2.2	GHz	Notes 1 & 2.
RF_IN Port Impedance	Z_{RFIN}		50		Ω	
RF_OUT Port Impedance	Z_{RFOUT}		50		Ω	

Note 1: Operation outside of this range is supported by using different custom tunes. Examples of other optimized tunes can be found here: [GRF5219 Custom Tunes](#)

Note 2: Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

Nominal Operating Parameters - General

The following conditions apply unless noted otherwise: typical application schematic using the 1.8 to 2.2 GHz tuning set. $R_{BIAS1} = 453 \Omega$ and $R_{BIAS2} = 2940 \Omega$, $V_{CC} = 5 \text{ V}$, 50Ω system impedance, $P_{OUT} = 4 \text{ dBm}$, $F_{TEST} = 2 \text{ GHz}$, $T_{PKG \text{ BASE}} = 25 \text{ }^{\circ}\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
V_{BIAS1} Logic Input Low	V_{IL}	0		0.2	V	Measured at V_{BIAS1} node (with bias-setting resistor in line between node and pin 14).
V_{BIAS1} Logic Input High	V_{IH}	1.5		V_{CC}	V	
V_{BIAS2} Logic Input Low	V_{IL}	0		0.2	V	Measured at V_{BIAS2} node (with bias-setting resistor in line between node and pin 13).
V_{BIAS2} Logic Input High	V_{IH}	1.5		V_{CC}	V	
V_{BIAS1} Logic Low Current	I_{IL}		20		nA	$V_{BIAS1}=0.2 \text{ V}$.
V_{BIAS1} Logic High Current	I_{IH}		5.7		mA	$V_{BIAS1}=5 \text{ V}$.
V_{BIAS2} Logic Low Current	I_{IL}		30		nA	$V_{BIAS2}=0.2 \text{ V}$.
V_{BIAS2} Logic High Current	I_{IH}		0.7		mA	$V_{BIAS2}=5 \text{ V}$.
Switching Rise Time	$t_{STBY-RISE}$		TBD		ns	Turn ON time: V_{BIAS1} & V_{BIAS2} LOW to HIGH (note 3).
Switching Fall Time	$t_{STBY-FALL}$		TBD		ns	Turn OFF time: V_{BIAS1} & V_{BIAS2} HIGH to LOW (note 4).

Note 3: Switching Time: 50% of V_{BIAS} to 90% of P_{OUT} .

Note 4: Switching Time: 50% of V_{BIAS} to 10% of P_{OUT} .

Disabled Mode

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Standby Current	I_{STBY}		150		nA	$V_{CC}=5 \text{ V}$. $V_{BIAS1}=V_{BIAS2}=0.2 \text{ V}$.

Nominal Operating Parameters - General (continued)

Thermal Data

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Thermal Resistance (Infrared Scan)	Θ_{JC}		TBD		°C/W	On standard evaluation board.
Channel Temperature @ 115 °C reference (package base)	$T_{CHANNEL}$		TBD		°C	$V_{CC}=5\text{ V}$. $I_{CCQ}=115\text{ mA}$. $P_{DISS}=600\text{ mW}$. No RF applied (note 5).

Note 5: MTTF > 10^6 hours for $T_{CHANNEL} \leq 190\text{ °C}$.

Nominal Operating Parameters - RF

1.8 to 2.2 GHz, 5 V Operation

The following conditions apply unless noted otherwise: typical application schematic using the 1.8 to 2.2 GHz tuning set, $V_{CC} = 5\text{ V}$, $F_{TEST} = 2\text{ GHz}$, $R_{BIAS1} = 453\ \Omega$, $R_{BIAS2} = 2940\ \Omega$, $50\ \Omega$ system impedance, $T_{PKG\ BASE} = 25\ ^\circ\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current	I_{CCQ}		109		mA	
Supply Current with RF Applied	I_{CC}		125		mA	$P_{OUT} = 14\text{ dBm}$.
Gain	S_{21}		44.1		dB	
Gain Flatness	$S_{21_{FLAT}}$		< 1.0		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Standby Mode Gain	$S_{21_{STBY}}$		-46		dB	$V_{BIAS1} < 0.2\text{ V}$, $V_{BIAS2} < 0.2\text{ V}$.
Input Return Loss	S_{11}		-9		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Output Return Loss	S_{22}		-7.4		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Reverse Isolation	S_{12}		-55		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Noise Figure	NF		4.1		dB	On standard evaluation board.
Output 3rd Order Intercept Point	OIP3		33.8		dBm	4 dBm P_{OUT} per tone at 2 MHz spacing.
Output 1 dB Compression Power	OP1dB		30		dBm	

Nominal Operating Parameters - RF


1.8 to 2.2 GHz, 3.3 V Operation

The following conditions apply unless noted otherwise: typical application schematic using the 1.8 to 2.2 GHz tuning set, $V_{CC} = 3.3\text{ V}$, $F_{TEST} = 2\text{ GHz}$, $R_{BIAS1} = 453\ \Omega$, $R_{BIAS2} = 2940\ \Omega$, $50\ \Omega$ system impedance, $T_{PKG\ BASE} = 25\ ^\circ\text{C}$. Evaluation board losses are included within the specifications.


Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current	I_{CCQ}		97		mA	
Supply Current with RF Applied	I_{CC}		120		mA	$P_{OUT} = 14\text{ dBm}$
Gain	S_{21}		45		dB	
Gain Flatness	$S_{21_{FLAT}}$		< 1.1		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Standby Mode Gain	$S_{21_{STBY}}$		-46		dB	$V_{BIAS1} < 0.2\text{ V}$, $V_{BIAS2} < 0.2\text{ V}$.
Input Return Loss	S_{11}		-9		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Output Return Loss	S_{22}		-7.4		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Reverse Isolation	S_{12}		-55		dB	$F_{RF} = 1.8\text{ to }2.2\text{ GHz}$
Noise Figure	NF		4.1		dB	On standard evaluation board.
Output 3rd Order Intercept Point	OIP3		33.7		dBm	4 dBm P_{OUT} per tone at 2 MHz spacing.
Output 1 dB Compression Power	OP1dB		26.7		dBm	

GRF5219 Typical Operating Curves: 5 V, 1.8 to 2.2 GHz Tune

GRF5219 Gain vs Frequency at $V_{cc3}(V) = 5\text{ V}$

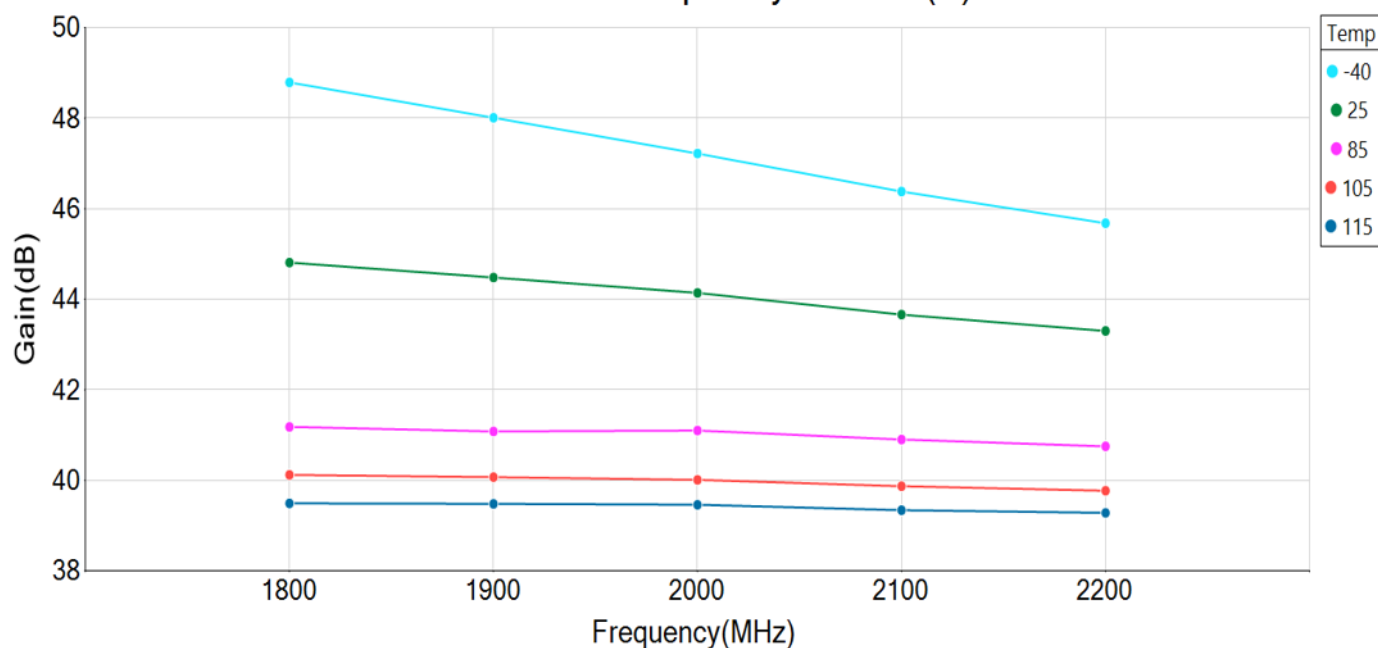


GRF5219 Gain vs Pout at Temp = 25 degC and $V_{cc3}(V) = 5\text{ V}$

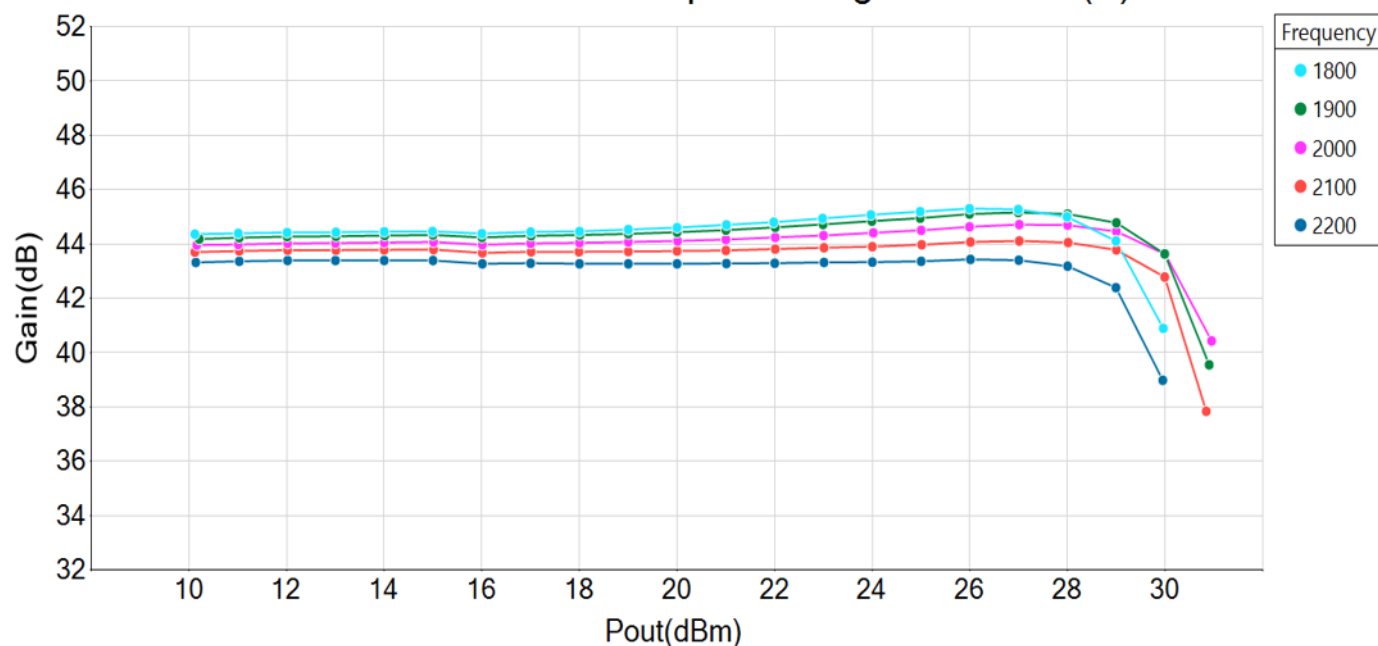


GRF5219 Typical Operating Curves: 5 V, 1.8 to 2.2 GHz Tune

GRF5219 OP1dB vs Frequency at Vcc3(V) = 5 V

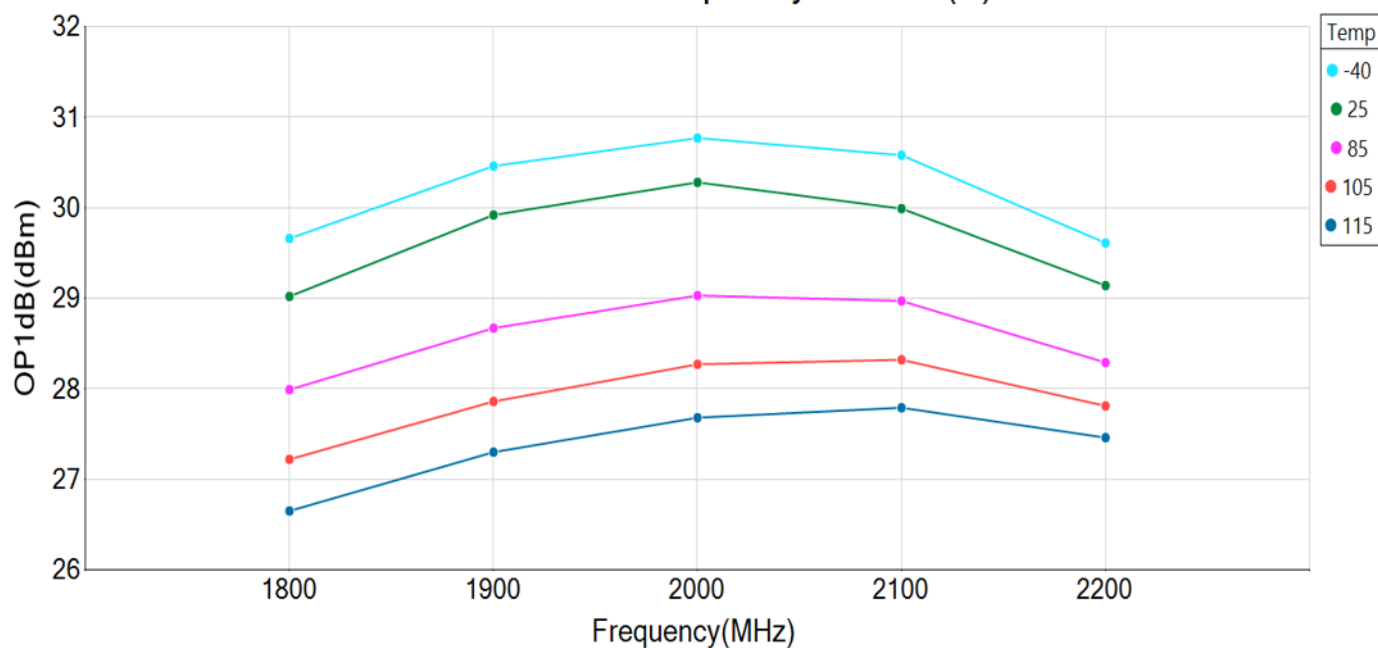


GRF5219 OIP3 vs Frequency at Vcc3(V) = 5 V

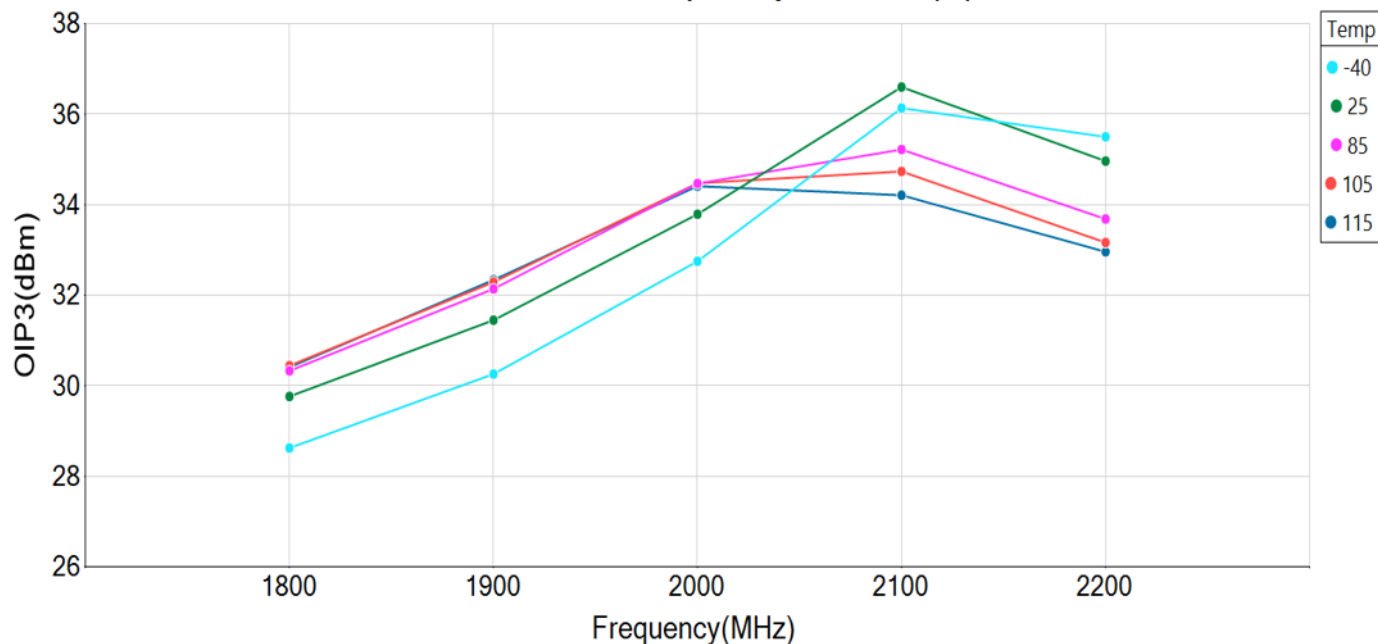


GRF5219 Typical Operating Curves: 5 V, 1.8 to 2.2 GHz Tune


GRF5219 ACLR1 vs Pout at Vcc2 = 5 V and ModulationType = 5G_1x10MHz

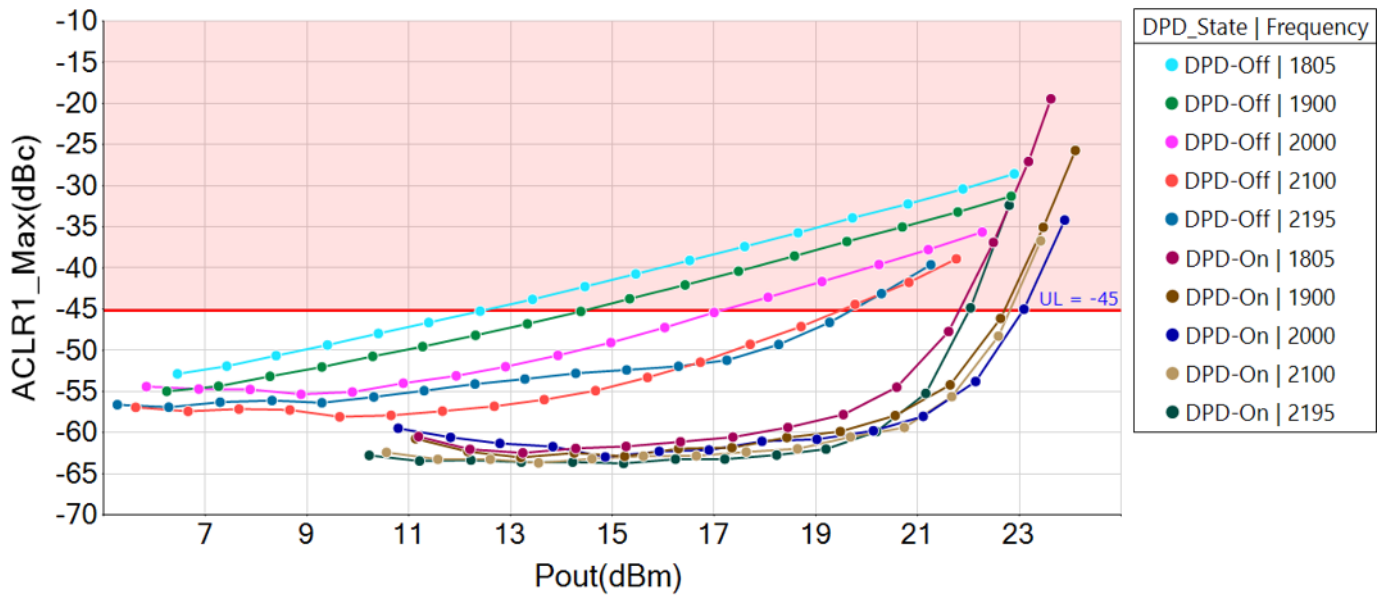


GRF5219 IccTot vs Pout at Temp = 25 degC and Vcc3(V) = 5 V

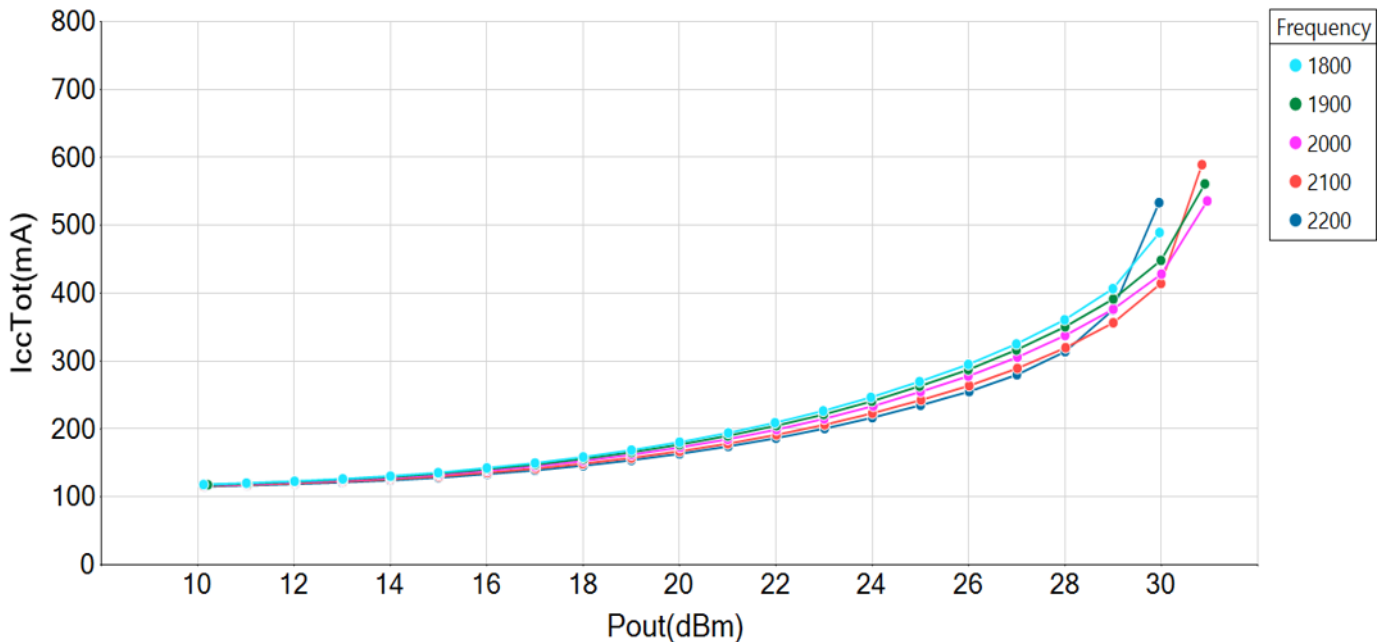


GRF5219 Typical Operating Curves: S-Parameters (5 V, 1.8 to 2.2 GHz Tune)

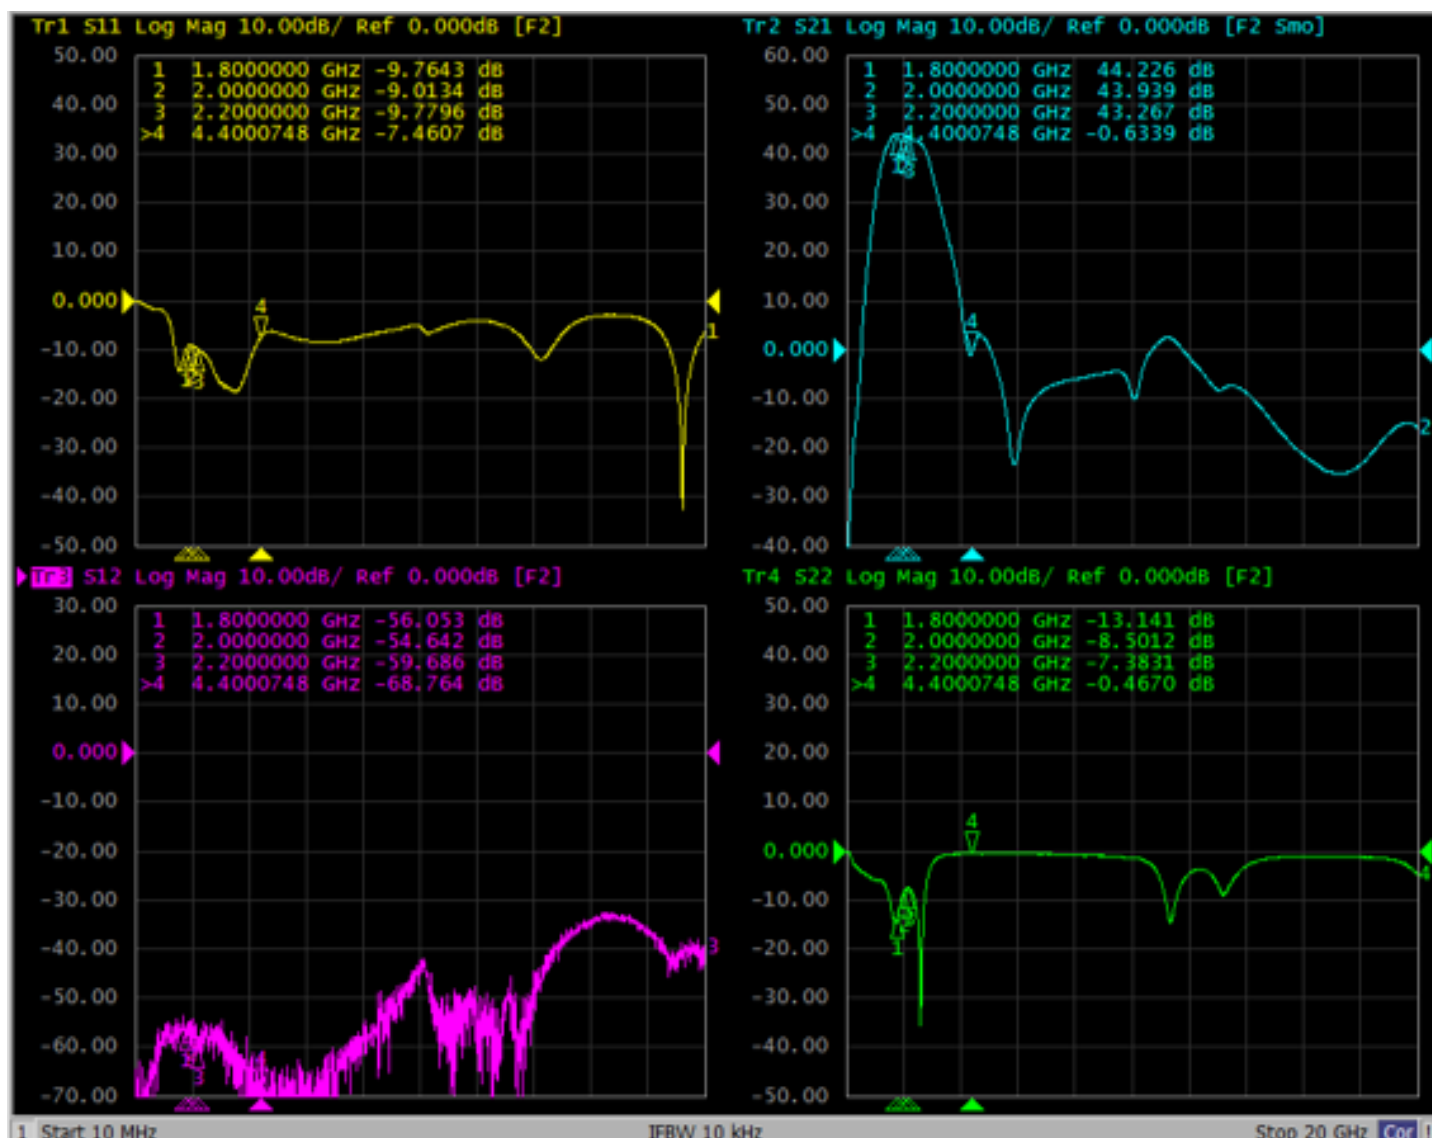


GRF5219 Typical Operating Curves: Stability Mu Factor (10 MHz to 20 GHz)

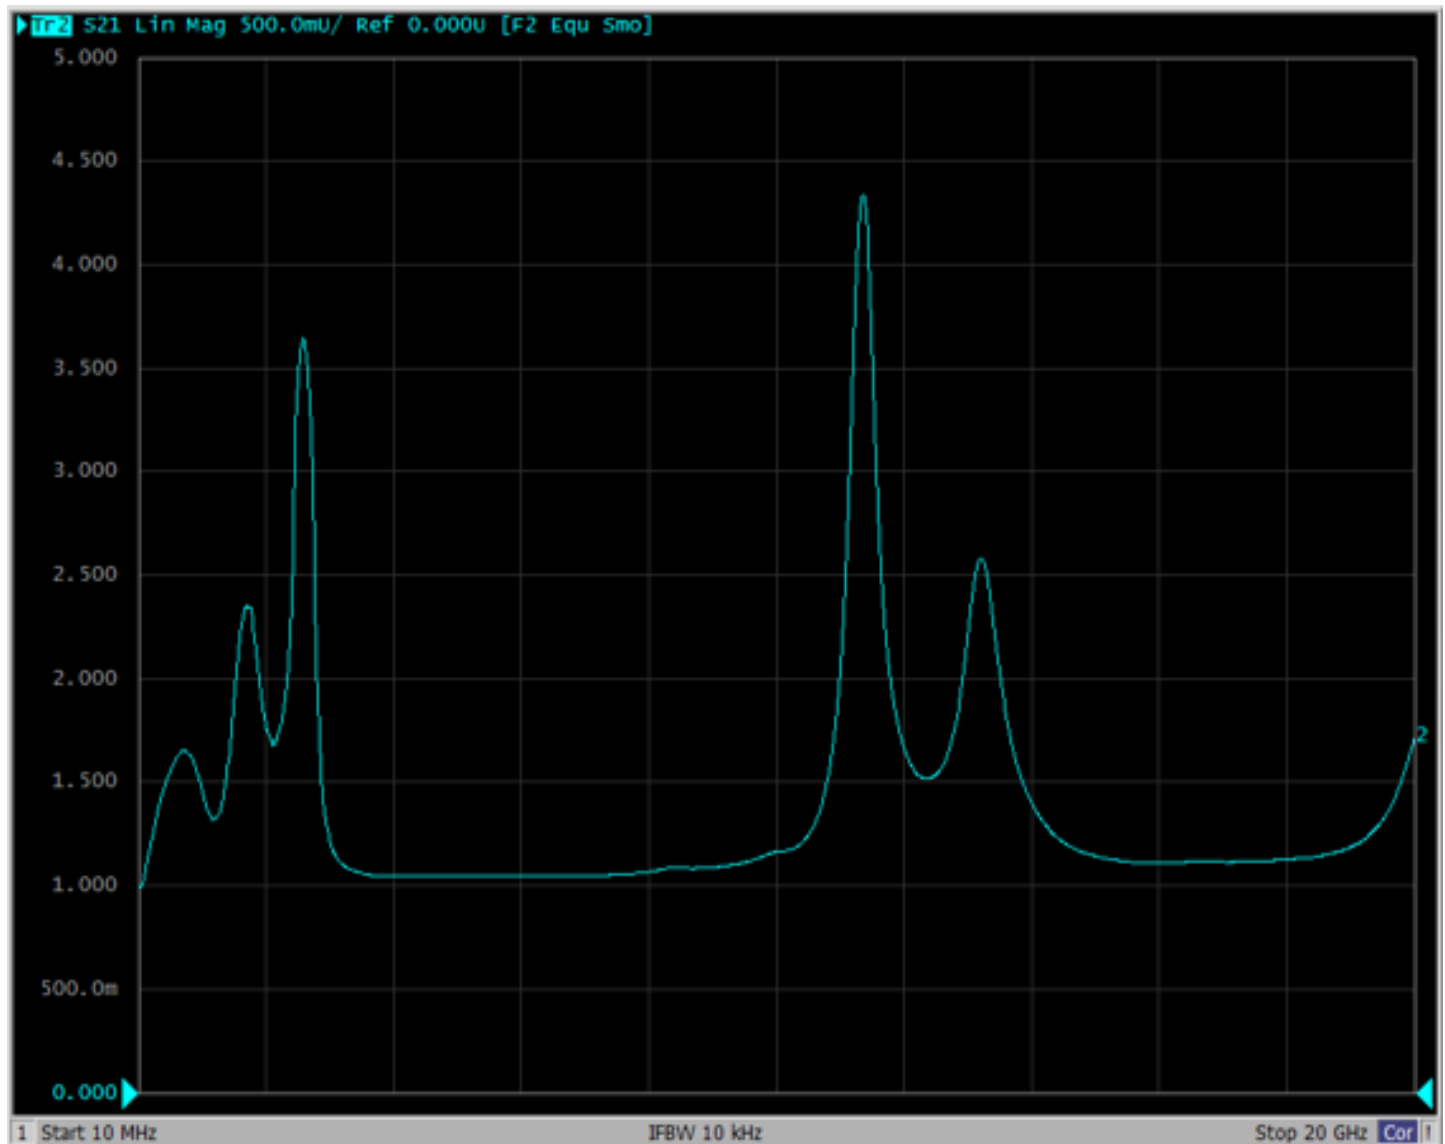

Note: Mu factor ≥ 1.0 implies unconditional stability.

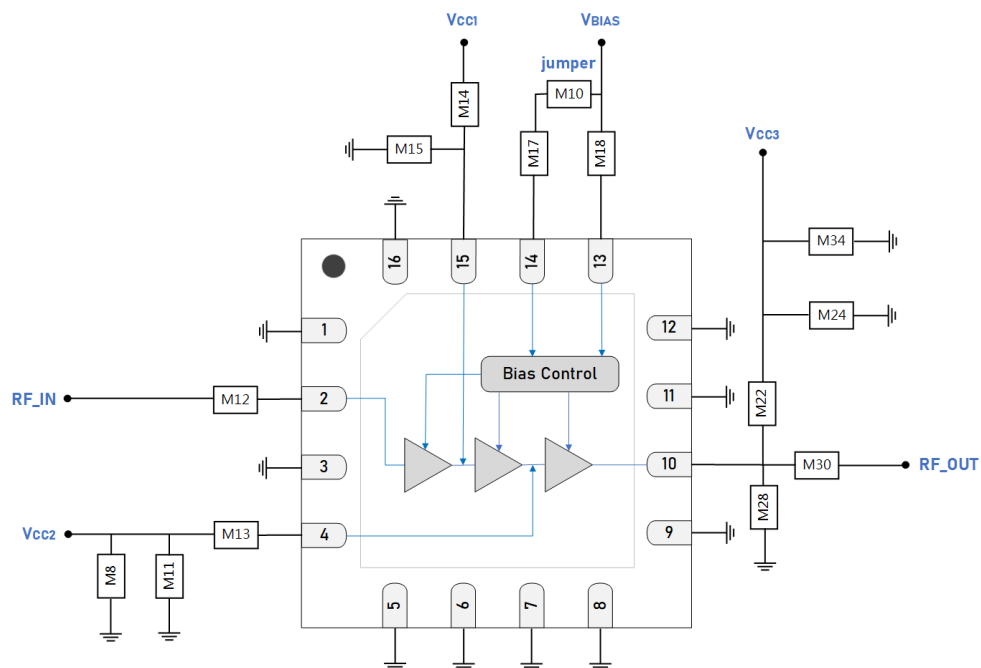


GRF5219 Standard Evaluation Board Schematic

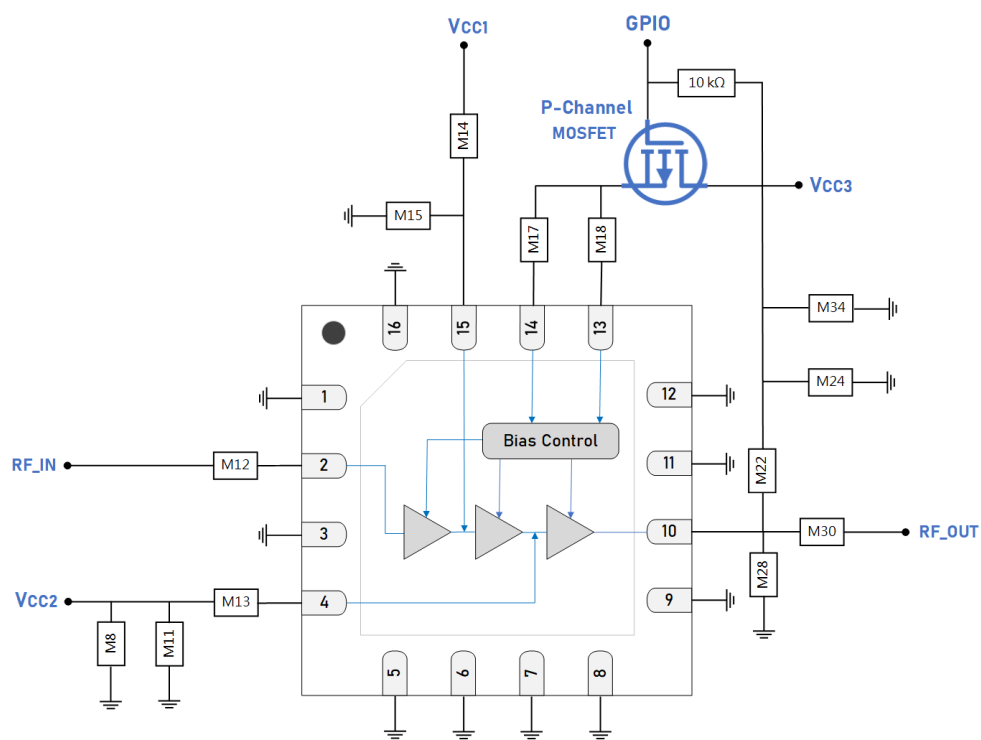


GRF5219 Recommended schematic for applications using low current GPIO to toggle V_{BIAS1} and V_{BIAS2}

GRF5219 Evaluation Board Assembly Diagram

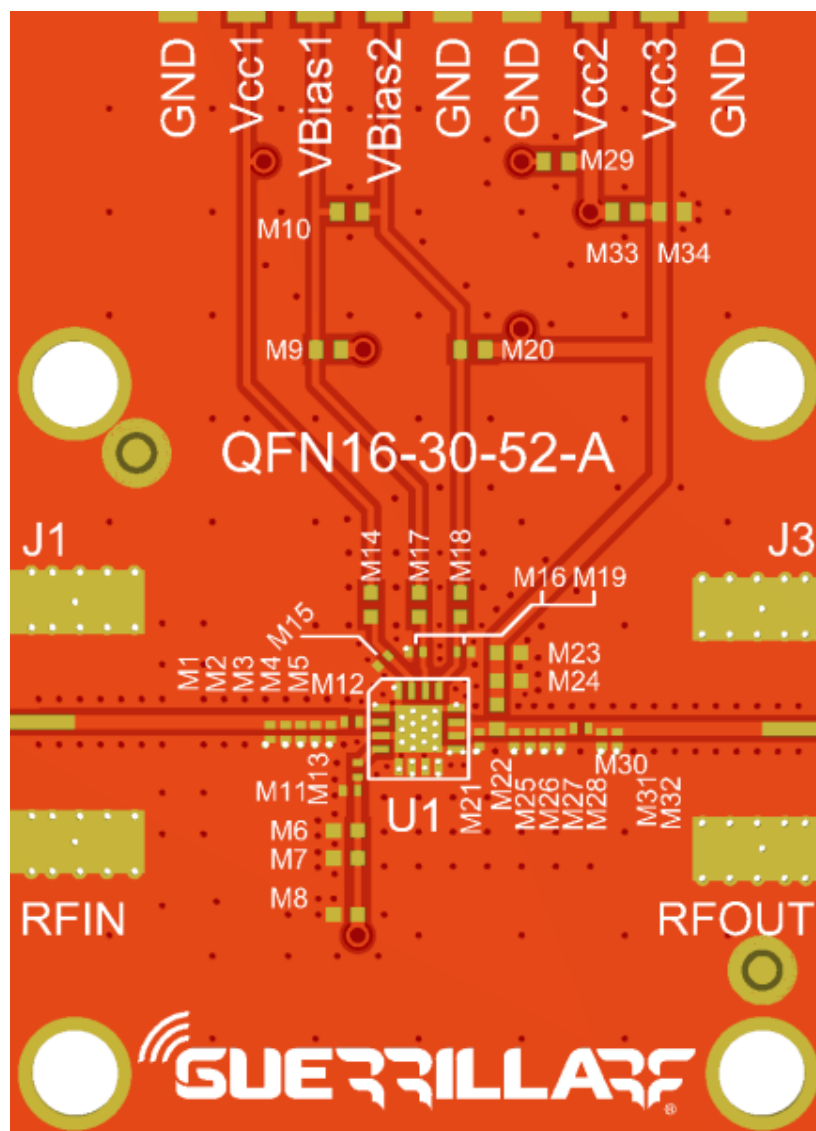


GRF5219 Evaluation Board Assembly Diagram Reference: 1.8 - 2.2 GHz Tune


Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M8	Capacitor	Murata	GRM	10 μ F	0402	ok
M10	Resistor (jumper)	Various	5%	0 Ω	0402	ok
M11	Capacitor	Murata	GRM	0.1 μ F	0201	ok
M12	Resistor	Various	5%	0 Ω	0201	ok
M13	Inductor	Murata	LQP-TN	3.6 nH	0201	ok
M14	Resistor	Various	5%	0 Ω	0402	ok
M15	Capacitor	Murata	GRM	0.1 μ F	0201	ok
M17	Resistor	Various	5%	453 Ω	0402	ok
M18	Resistor	Various	5%	2940 Ω	0402	ok
M22	Inductor	Coilcraft	HP High-Q	10 nH	0402	ok
M24	Capacitor	Murata	GRM	0.1 μ F	0402	ok
M28	Capacitor	Murata	GJM	2.4 pF	0201	ok
M30	Capacitor	Murata	GRM	10 pF	0201	ok
M34	Capacitor	Murata	GRM	10 μ F	0402	ok
Evaluation Board	QFN16-30-52-A					

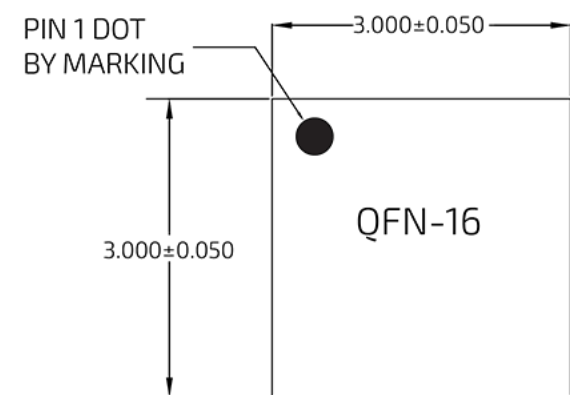

TOP VIEW

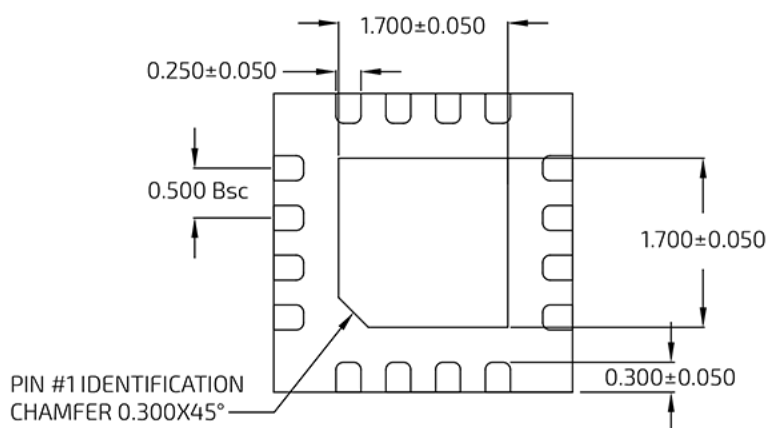


BOTTOM VIEW

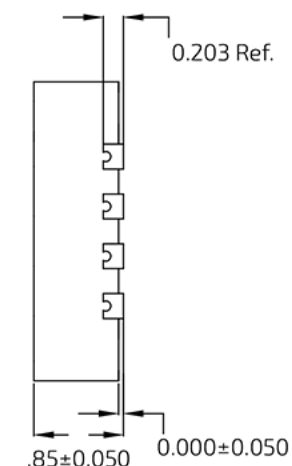

SIDE VIEW

QFN 16 3x3mm Package Dimensions

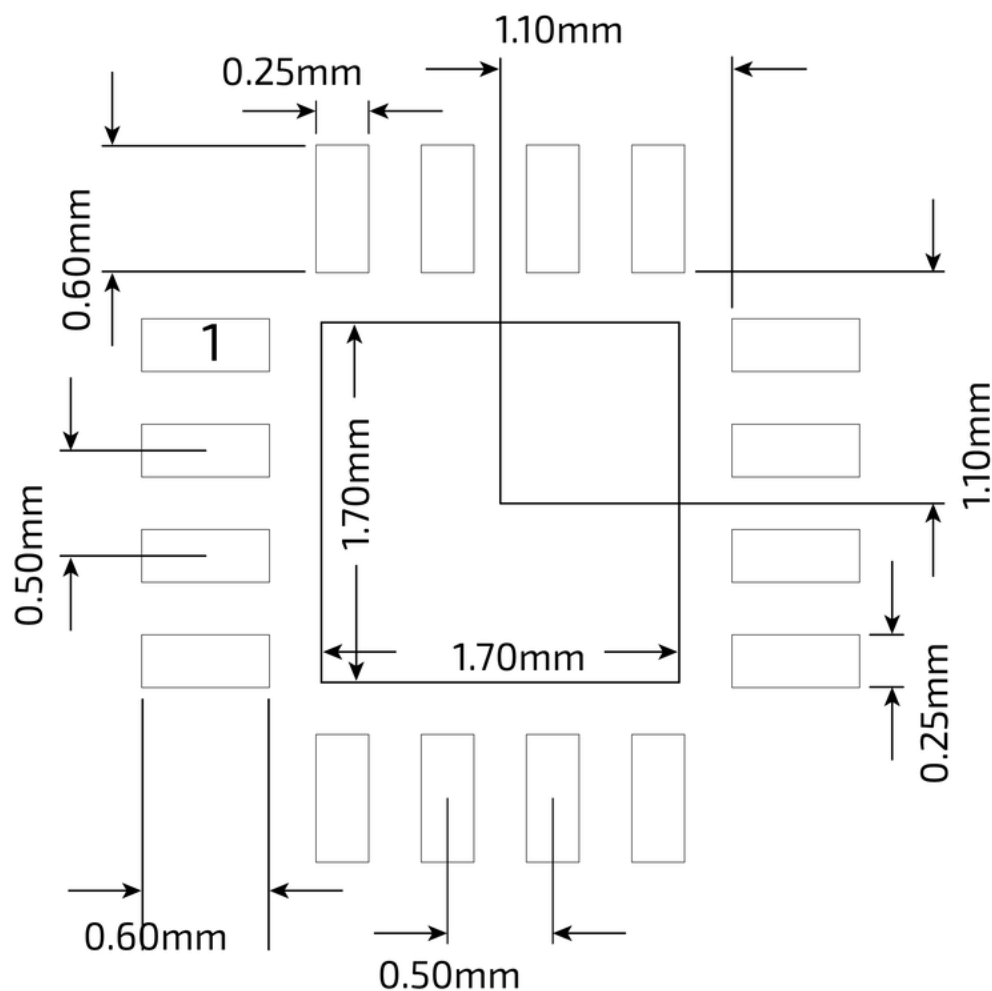

QFN 16 3x3mm Suggested PCB Footprint (Top View)


Package Marking Diagram




Line 1: "YY" = Year. "WW" = WORK WEEK the Device was assembled.
 Line 2: "GRF" = Guerrilla RF
 Line 3: "XXXX" = Device Part Number.

Tape and Reel Information

Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag, and the outside surface of the box. For the latest reel specifications and package information (including units/reel), please visit [Package Manufacturing Information](#) | [Guerrilla RF](#) (guerrilla-rf.com).

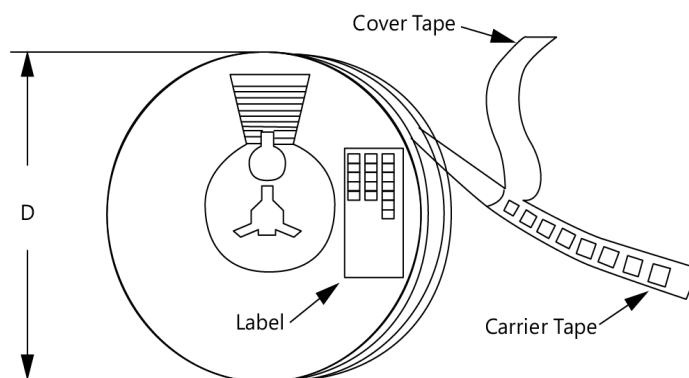

Tape and Reel Packaging with Reel Diameter Noted (D)

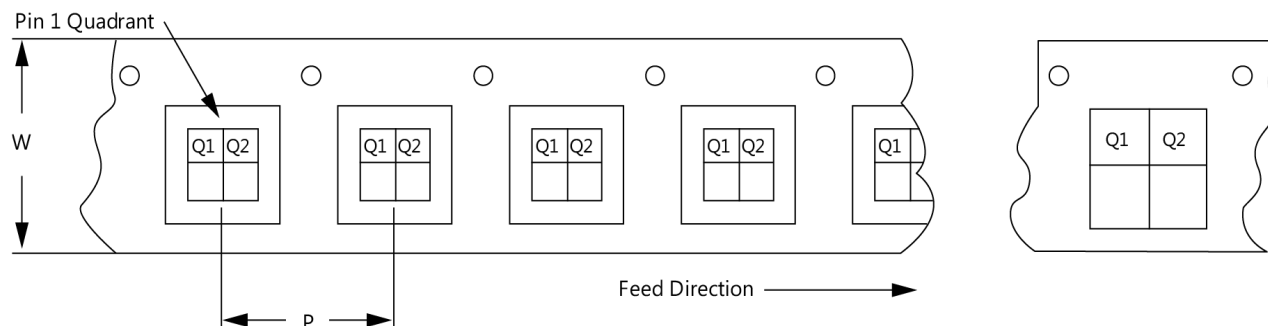

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information



Revision History

Revision Date	Description of Change
November 19, 2024	Preliminary Data Sheet.
March 14, 2025	Added new specifications and plots.



Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the data sheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks, and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.