

GRF5517W

HIGH LINEARITY POWER AMPLIFIER 1.6 to 1.92 GHz

FEATURES

- Excellent OP1dB, OIP3, ACLR and IM3 Performance
- Native Linearity Provides up to +23 dBm P_{OUT} with > 45 dBc ACLR – Without the Need for Digital Predistortion Correction
- +23 dBm Linear Output Power Maintained at 105 °C
- Flexible Biasing Provides Latitude for Linearity Optimization
- 225 mA Native Mode Quiescent Current Consumption
- 5 V Supply Voltage
- 50 Ω Single-ended Input and Output Impedances
- Digital Shutdown
- Rugged Design is Extremely Resilient to Mismatched Loads
- -40 to 105 °C Operating Temperature Range
- Compact 3 x 3 mm QFN-16 Package

Tested to AEC-Q100 Grade 2 Qualification

- 100% Device Reflow at Assembly
- 100% Optical Die Inspection

Reference: 5 V / 225mA I_{CCQ} / 1747 MHz

- Gain: 27.5 dB
- OIP3: 48 dBm @ +23 dBm P_{OUT} /tone
- OP1dB: 32 dBm
- Noise Figure: 5.4 dB

APPLICATIONS

- Cellular Boosters
- Automotive Compensators
- Picocells/Femtocells
- Customer Premise Equipment

DESCRIPTION


The GRF5517W is a high gain, two-stage InGaP HBT power amplifier designed to deliver excellent P1dB, ACLR and IM3 performance over the 1700 to 1800 MHz band. Its exceptional native linearity makes it an ideal choice for transmitter applications that typically do not employ digital predistortion correction schemes.


This device is part of a complete family of externally matched linear amplifiers that cover the following frequency ranges:

GRF5506: 0.66 - 0.72 GHz	GRF5518: 1.8 - 2.0 GHz
GRF5507: 0.7 - 0.91 GHz	GRF5519: 1.92 - 2.2 GHz
GRF5508: 0.777 - 0.96 GHz	GRF5521: 2.11 - 2.17 GHz
GRF5510: 0.88 - 0.96 GHz	GRF5526: 2.2 - 2.7 GHz
GRF5517: 1.6 - 1.92 GHz	GRF5536: 3.3 - 4.2 GHz

Please consult with the GRF applications engineering team for custom tuning/evaluation board data.

BLOCK DIAGRAM

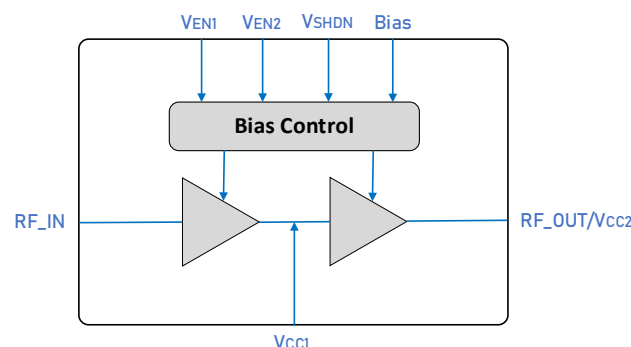

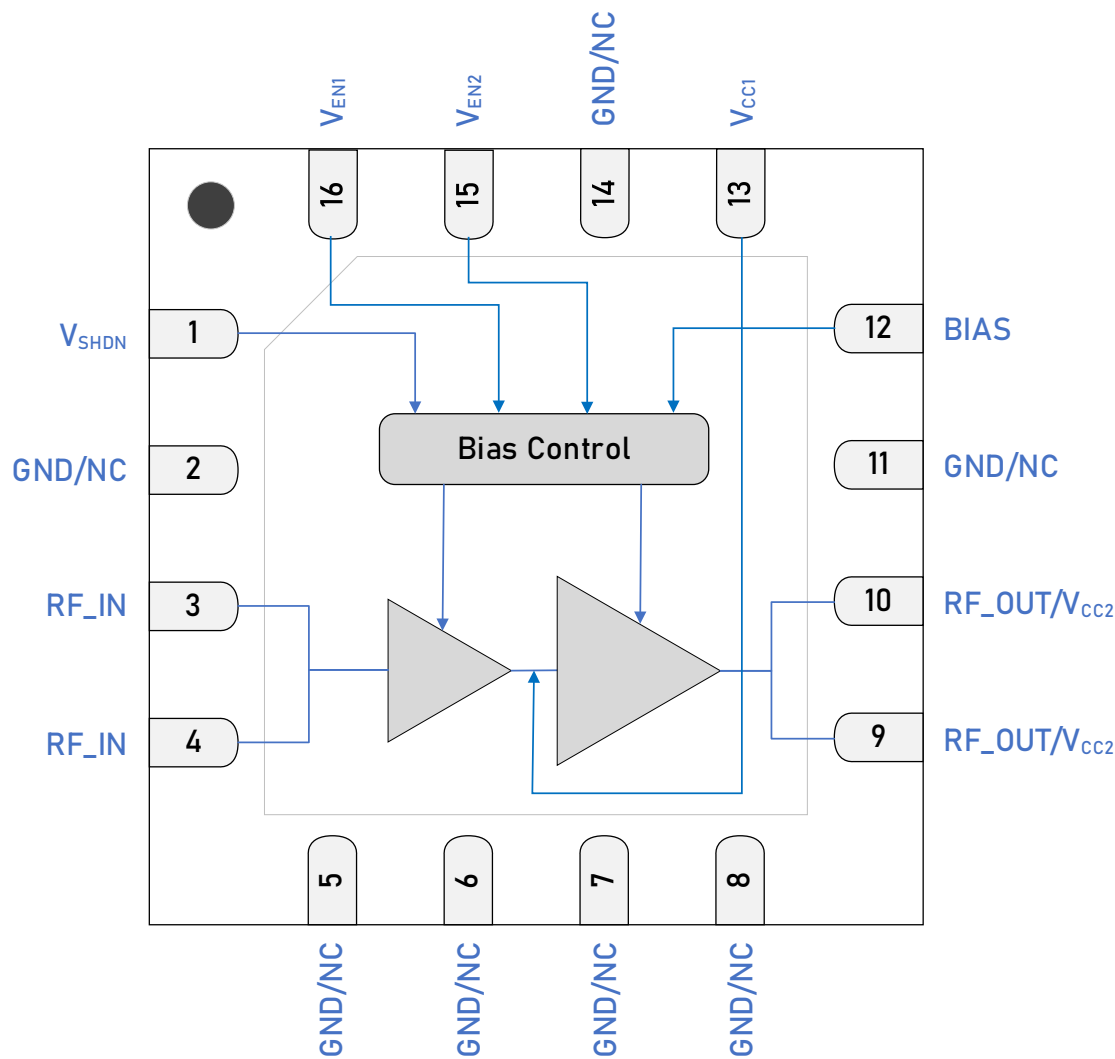

3 x 3 mm QFN-16 Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
1	V _{SHDN}	Digital Shutdown Pin	V _{SHDN} ≥ 1.7 V (Logic HIGH) disables device. V _{SHDN} ≤ 0.9 V (Logic LOW) enables device.
2, 5, 6, 7, 8, 11, 14	GND/NC	Ground or No Connect	No internal connection to die. These pins can be left unconnected, or be connected to ground (recommended). Use a via as close to the pin as possible if grounded.
3, 4	RF_IN	RF Input	Pins 3 & 4 tied together on system board. Internally matched 50 Ω. An external DC blocking capacitor must be used.
9, 10	RF_OUT/V _{CC2}	PA Output/Bias Voltage	Pins 9 & 10 tied together on system board. V _{CC2} must be applied to this pin via an RF choke.
12	Bias	Bias Circuit Supply	Connect to V _{CC2} through external resistor.
13	V _{CC1}	Bias Voltage	Connect to V _{CC1} through external resistor.
15	V _{EN2}	Enable2 Voltage Input	V _{EN2} and series resistor set I _{CCQ} for the output stage. V _{EN2} ≤ 0.2 volts disables stage 2.
16	V _{EN1}	Enable1 Voltage Input	V _{EN1} and series resistor set I _{CCQ} for the input stage. V _{EN1} ≤ 0.2 volts disables stage 1. Connecting an external de-coupling capacitor to ground is required for optimal NF performance.
PKG BASE	GND	Ground	Provides DC and RF ground for the amplifier, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Note 1: GRF5526 and GRF5536 have a common pinout that is slightly different from the pinout shared by all the other GRF55XX PA's. Please see page 2.

Truth Table

Pin	Logic	Condition
V _{SHDN}	LOW	Full Operation
	HIGH	All Amplifiers Off
V _{EN1}	LOW	Stage 1 Amplifier Off
	HIGH	Stage 1 Amplifier On
V _{EN2}	LOW	Stage 2 Amplifier Off
	HIGH	Stage 2 Amplifier On

Absolute Ratings

Parameter		Symbol	Min.	Max.	Unit
Supply Voltage		V_{CC}		5.5	V
RF Input Power	50 Ω , $V_{CC} = 5$ V, CW Tone, 100% Duty Cycle, $T_{PKG \text{ BASE}} = 25^{\circ}\text{C}$.	$P_{IN \text{ MAX} - 1:1}$		23	dBm
	Load VSWR $\leq 8:1$, all phase angles, $V_{CC} = 5$ V, CW Tone, 100% Duty Cycle, $T_{PKG \text{ BASE}} = -40$ to 105°C .	$P_{IN \text{ MAX} - 8:1}$		20	
Operating Temperature (package base).		$T_{PKG \text{ BASE}}$	-40	105	$^{\circ}\text{C}$
Maximum Junction Temperature (MTTF > 10^6 hours).		$T_{J \text{ MAX}}$		170	$^{\circ}\text{C}$
Maximum Dissipated Power Stage 1. DC only (no RF applied).		$P_{DISS \text{ MAX}}$		500	mW
Maximum Dissipated Power Stage 2. DC only (no RF applied).		$P_{DISS \text{ MAX}}$		1400	mW
Shutdown Voltage.		V_{SHDN}		4	V

Electrostatic Discharge

Charged Device Model	CDM	1000		V
Human Body Model	HBM	1000		V

Storage

Storage Temperature	T_{STG}	-65	150	$^{\circ}\text{C}$
Moisture Sensitivity Level	MSL		1	--


Caution! ESD Sensitive Device.
Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 — Package and Manufacturing Information](#).

All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions. Additional information for this topic can be found at this link - [Environmental and Restricted Substance Statement Library](#).

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V _{CC}	3	5	5.5	V	
Operating Temperature (package base)	T _{PKG BASE}	-40		105	°C	
RF Frequency Range	F _{RF}	1.6		1.92	GHz	Typical application schematic using the 1.7 to 1.8 GHz tuning set (note 2).
RF_IN Port Impedance	Z _{RFIN}		50		Ω	Single-ended with 2-element match.
RF_OUT Port Impedance	Z _{RFOUT}		50		Ω	Single-ended with 3-element match.

Note 2: Contact the Guerrilla RF applications team for guidance on optimizing the tuning of the device for alternative bands.

Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: typical application schematic using the 1.7 to 1.8 GHz tuning set, $V_{CC} = 4.75$ to 5.25 V, $V_{SHDN} = \text{LOW}$, $I_{CCQ} = 225$ mA, $P_{OUT} = +23$ dBm, $F_{TEST} = 1.7$ to 1.8 GHz, $M5 = 2.26$ k Ω , $M9 = 2.94$ k Ω . Typical values are $V_{CC} = 5$ V, $I_{CCQ} = 225$ mA, $P_{OUT} = +23$ dBm, $F_{TEST} = 1.747$ GHz, $T_{PKG\ BASE} = 25$ °C. 50 Ω system impedance. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Quiescent Current	I_{CCQ}		225		mA	$I_{CCQ1} + I_{CCQ2}$. No RF applied.
Supply Current with RF Applied	I_{CC}		305		mA	$I_{CC1} + I_{CC2}$. RF Applied with $P_{OUT} = +23$ dBm.
Enable Current 1	$I_{ENABLE1}$		3		mA	$V_{CC} = 5$ V, $T_{PKG\ BASE} = 25$ °C.
Enable Current 2	$I_{ENABLE2}$		1		mA	$V_{CC} = 5$ V, $T_{PKG\ BASE} = 25$ °C.
Operating Temperature Range	$T_{PKG\ BASE}$	-40		105	°C	Measured on package base.
Logic Input Low	V_{IL}	0		0.9	V	Applies to V_{SHDN} input.
Logic Input High	V_{IH}	1.7		V_{CC}	V	Applies to V_{SHDN} input.
Logic Current Low	I_{IL}		3		nA	Applies to V_{SHDN} input, $V_{IL} = 0.9$ V.
Logic Current High	I_{IH}		60		μ A	Applies to V_{SHDN} input, $V_{IH} = 1.8$ V.
			280			Applies to V_{SHDN} input, $V_{IH} = 3.3$ V.
Switching Rise Time	T_{RISE}		500		ns	Applies to V_{SHDN} input.
Switching Fall Time	T_{FALL}		2800		ns	Applies to V_{SHDN} input.

Disabled Mode

Supply Quiescent Current	$I_{CCQ-SHDN}$		1		μ A	$V_{CC} = 5$ V, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.
Enable Current 1	$I_{ENABLE1-SHDN}$		3		mA	$V_{CC} = 5$ V, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.
Enable Current 2	$I_{ENABLE2-SHDN}$		1.3		mA	$V_{CC} = 5$ V, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.

Thermal Data (Stage 1 and Stage 2)

See plot of Die Temp vs. Output Power						On standard evaluation board.
---------------------------------------	--	--	--	--	--	-------------------------------


Nominal Operating Parameters – RF: 1.7 to 1.8 GHz, 5 V

The following conditions apply unless noted otherwise: typical application schematic using the 1.7 to 1.8 GHz tuning set, $V_{CC} = 4.75$ to 5.25 V, $V_{SHDN} = \text{LOW}$, $I_{CCQ} = 225$ mA, $P_{OUT} = +23$ dBm, $F_{TEST} = 1.7$ to 1.8 GHz, $M5 = 2.26$ k Ω , $M9 = 2.94$ k Ω . Typical values are $V_{CC} = 5$ V, $I_{CCQ} = 225$ mA, $P_{OUT} = +23$ dBm, $F_{TEST} = 1.747$ GHz, $T_{PKG\ BASE} = 25$ °C. $50\ \Omega$ system impedance. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Small Signal Gain	S21		27.5		dB	LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR, $F_{TEST} = 1.747$ GHz, $T_{PKG\ BASE} = 25$ °C, $V_{CC} = 5$ V, $P_{IN} = -25$ dBm.
Standby Mode Gain	S21 _{STBY}		-22		dB	Disabled Mode, LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$, $P_{IN} = 0$ dBm.
Input Return Loss	S11		< -7		dB	$F_{RF} = 1.7$ to 1.8 GHz.
Output Return Loss	S22		< -10		dB	$F_{RF} = 1.7$ to 1.8 GHz.
Reverse Isolation	S12		> 50		dB	$F_{RF} = 1.7$ to 1.8 GHz.
Noise Figure	NF		5.4		dB	On standard evaluation board.
Output 3rd Order Intercept	OIP3		48		dBm	+23 dBm P_{OUT} per tone at 600 kHz spacing.
Output 1 dB Compression Power	OP1dB		32		dBm	Sine wave input, $V_{CC} = 5$ V.
2 nd Harmonic	2f ₀			-47	dBc	$P_{OUT} = +26$ dBm (note 3).
3 rd Harmonic	3f ₀			-55	dBc	$P_{OUT} = +26$ dBm (note 3).
Adjacent Channel Leakage Ratio	ACLR			-45	dBc	$P_{OUT} = +23$ dBm, LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR, $F_{TEST} = 1.747$ GHz, $V_{CC} = 5$ V.
Output IMD3 Level (Using extended 1710-1920 MHz tune)	IMD3			-19	dBm	+22 dBm P_{OUT} per tone at 600 kHz spacing. Typical application schematic using the 1.71 to 1.92 GHz tuning set (note 3).







Note 3: MIN/MAX limits defined using *modelled estimates* that account for part-to-part variations and expected process spreads. As additional production lots are fabricated, accumulated test data will be used to refine the MIN/MAX limits.

GRF5517W Typical Operating Curves: *Gain vs. P_{OUT} (9.8 dB PAR)*

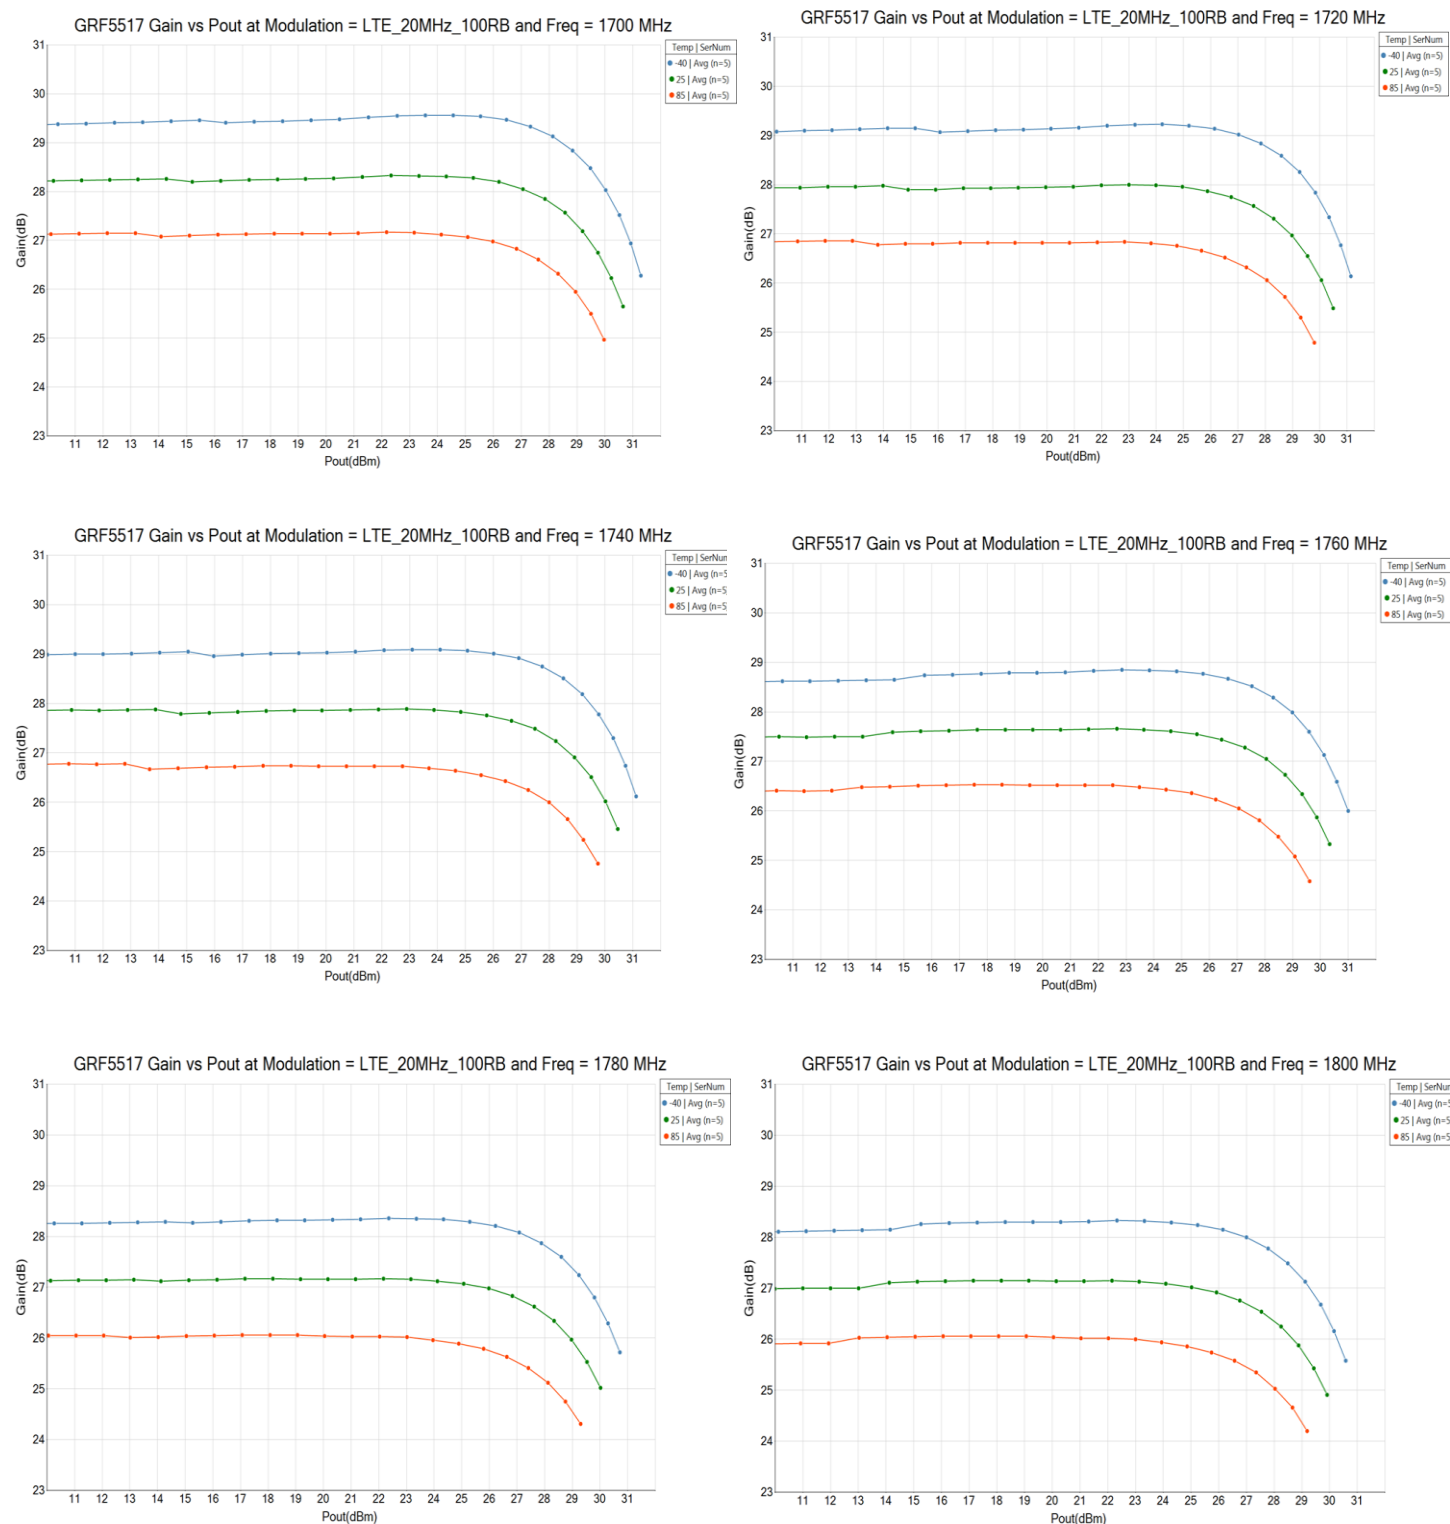





GRF5517W Typical Operating Curves: *Gain vs. P_{IN} (Shutdown Mode, $V_{SHDN} = 3.3V$, 9.8 dB PAR)*

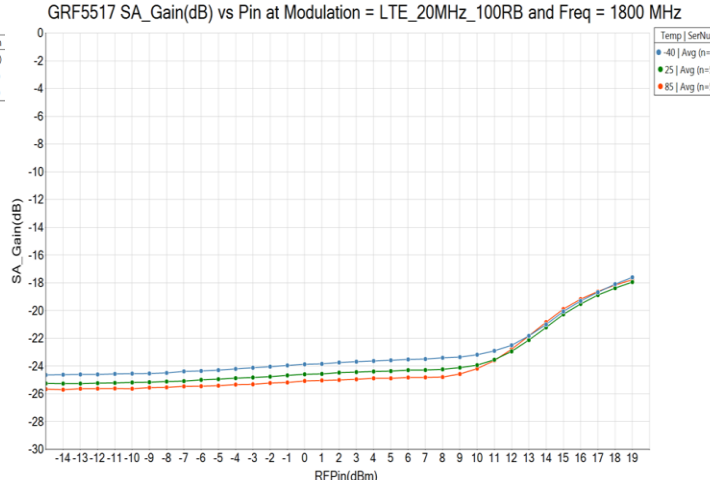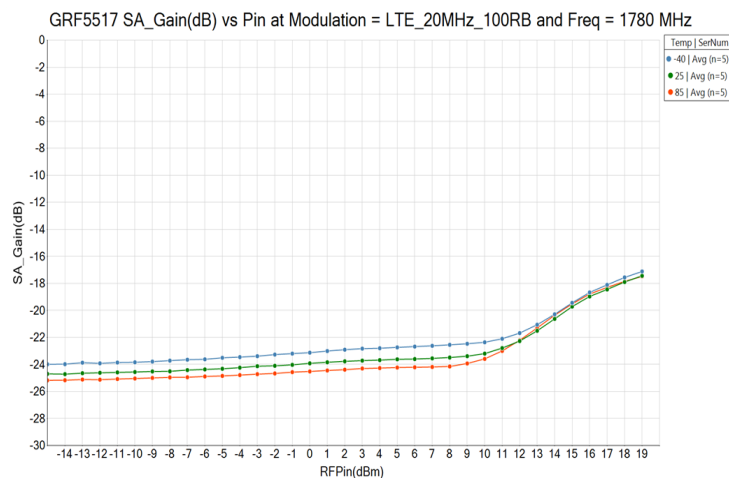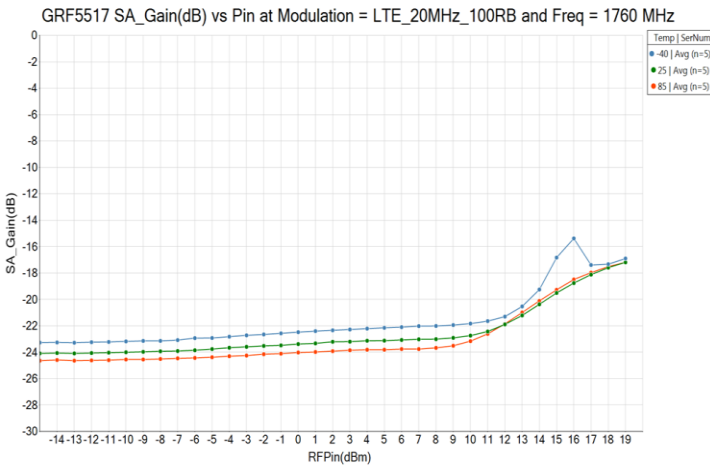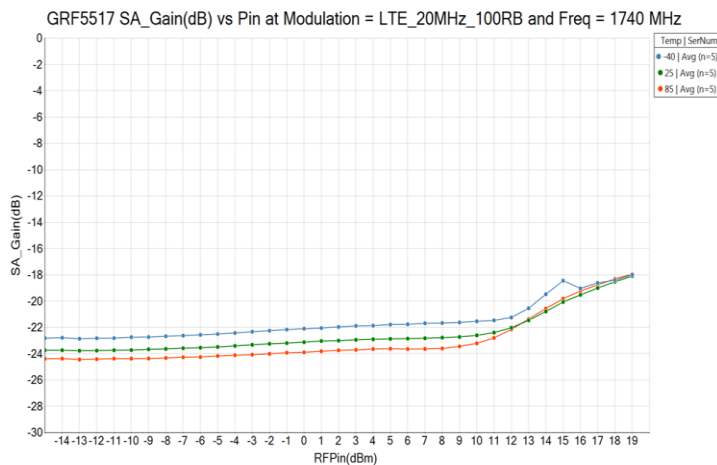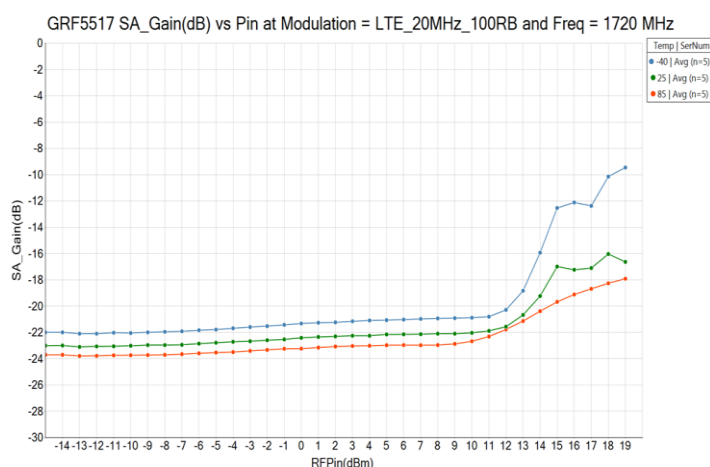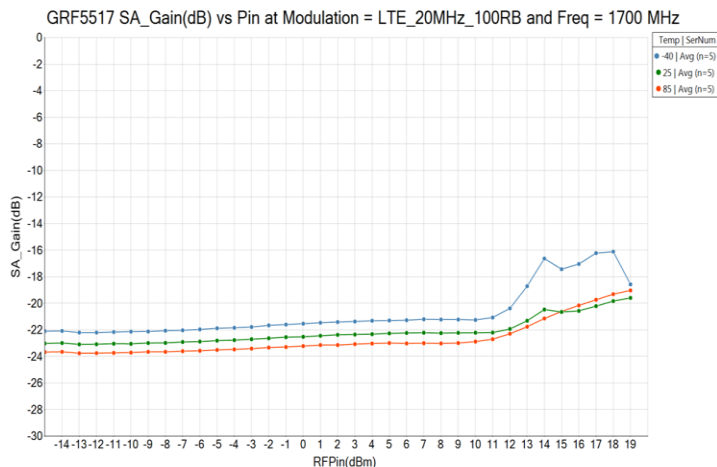


GRF5517W Typical Operating Curves: IMD3 vs. P_{OUT} (Per Tone with 600kHz Tone Spacing)

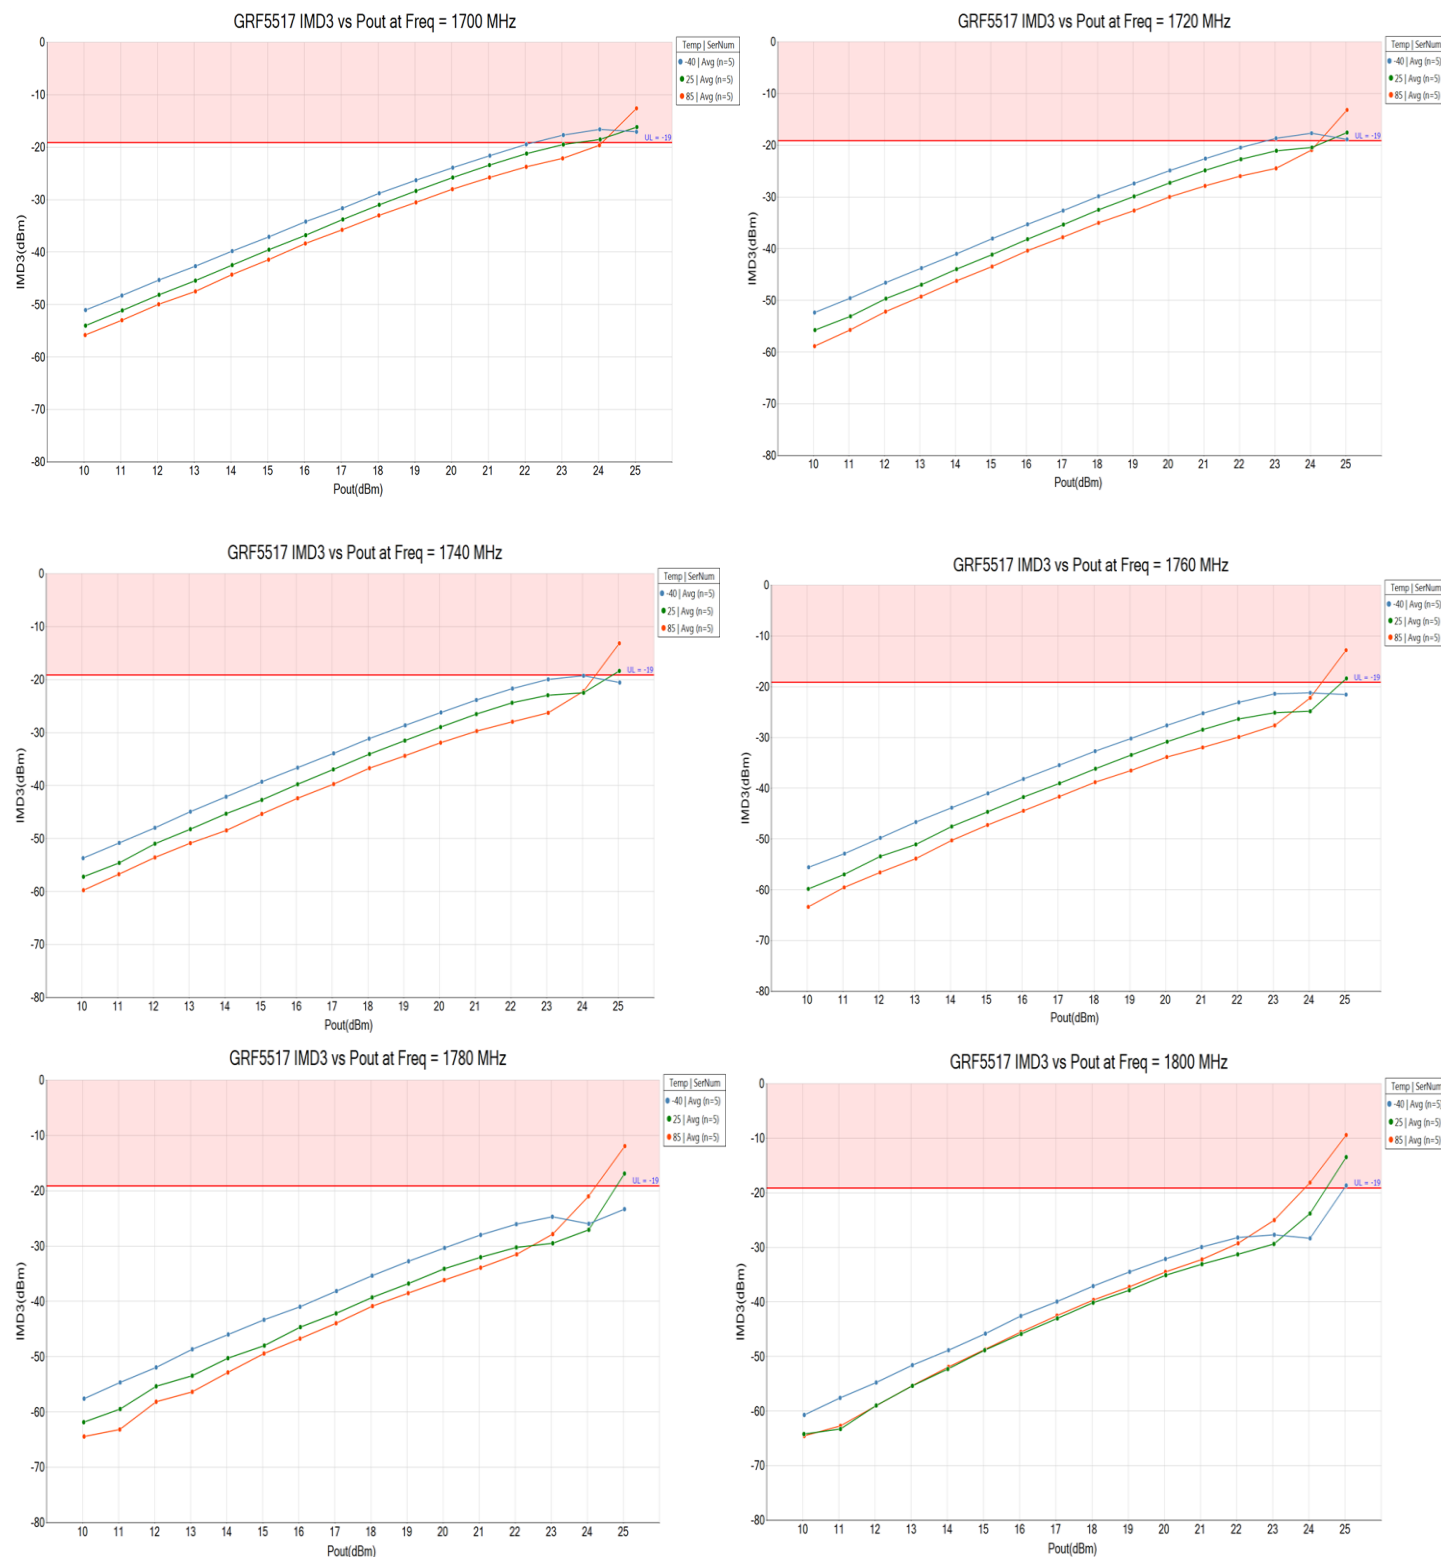


GRF5517W Typical Operating Curves: $OIP3$ vs. P_{OUT} (Per Tone with 600kHz Tone Spacing)

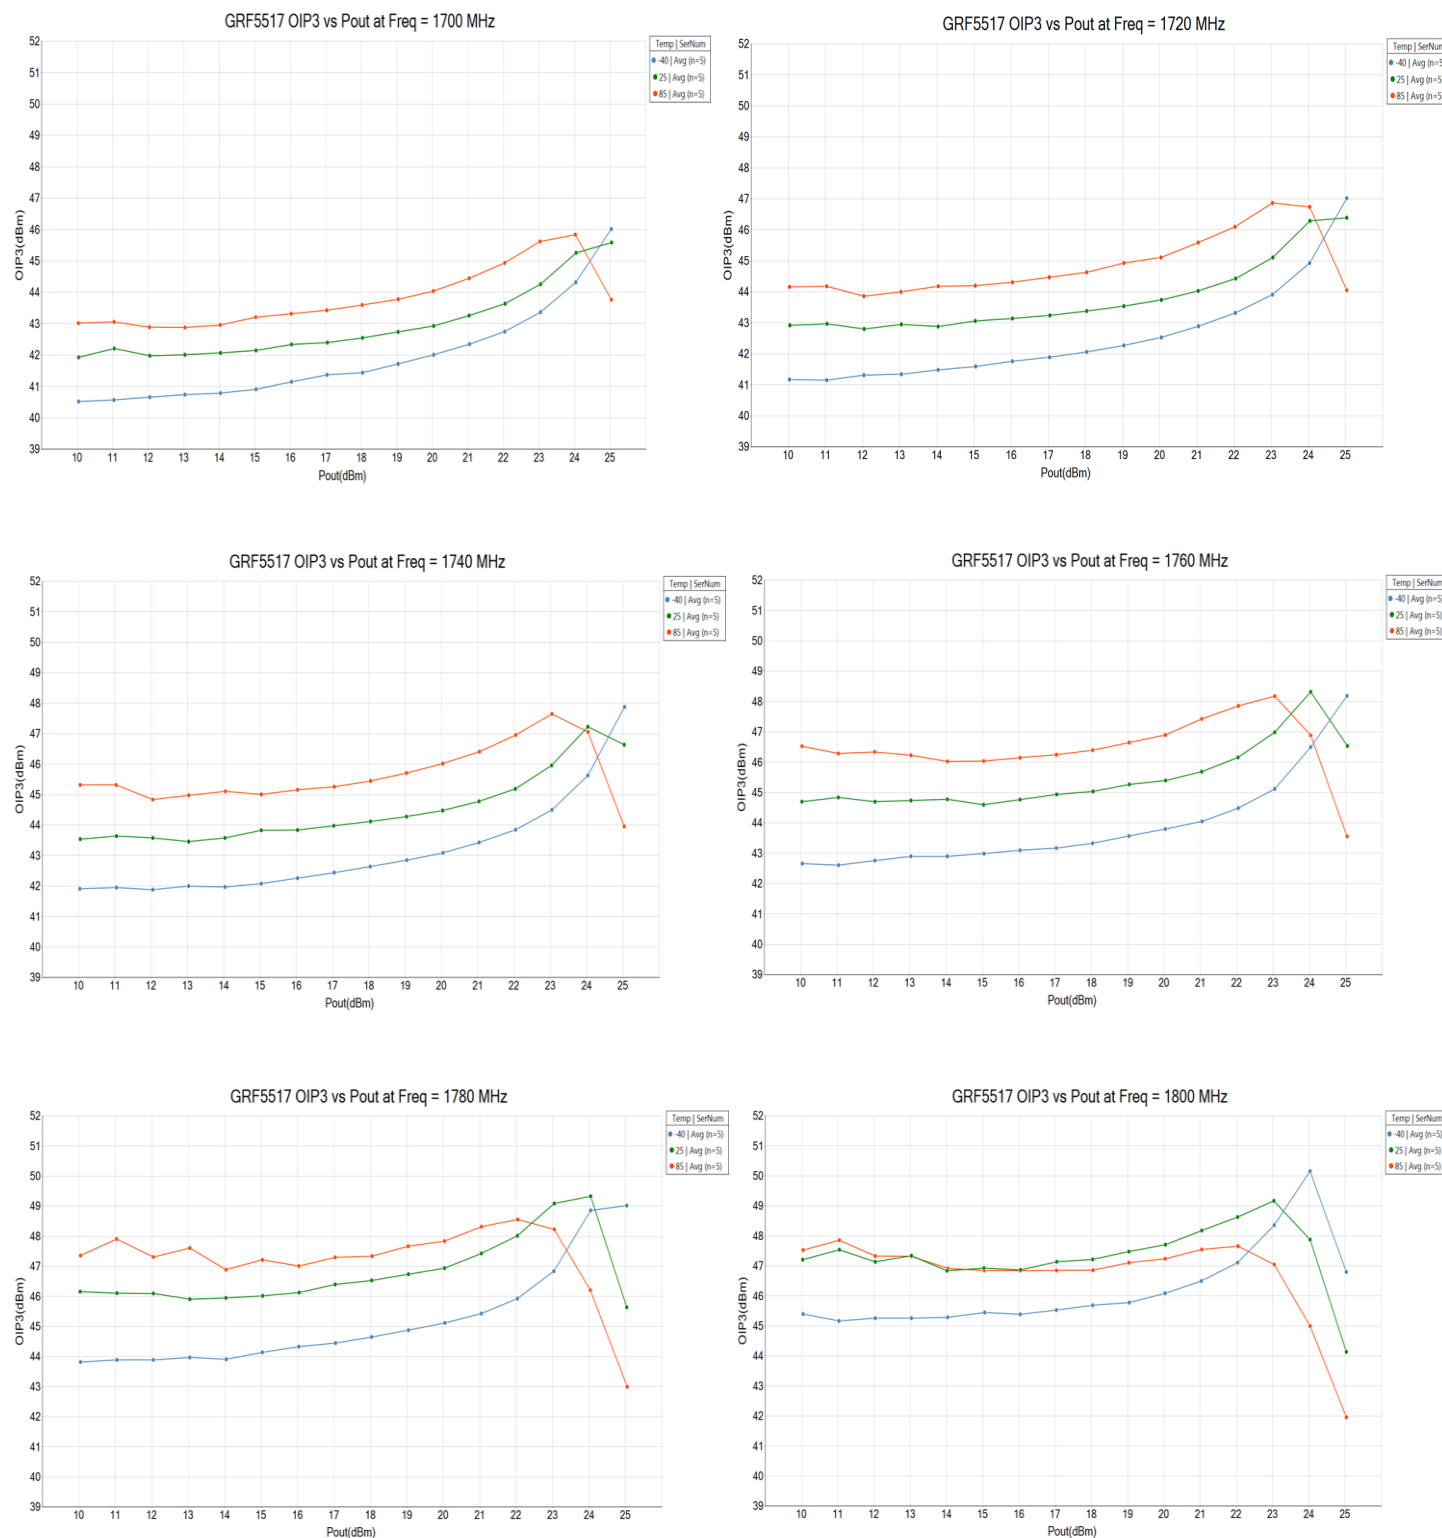







GRF5517W Typical Operating Curves: PAE vs. P_{OUT} (9.8 dB PAR)

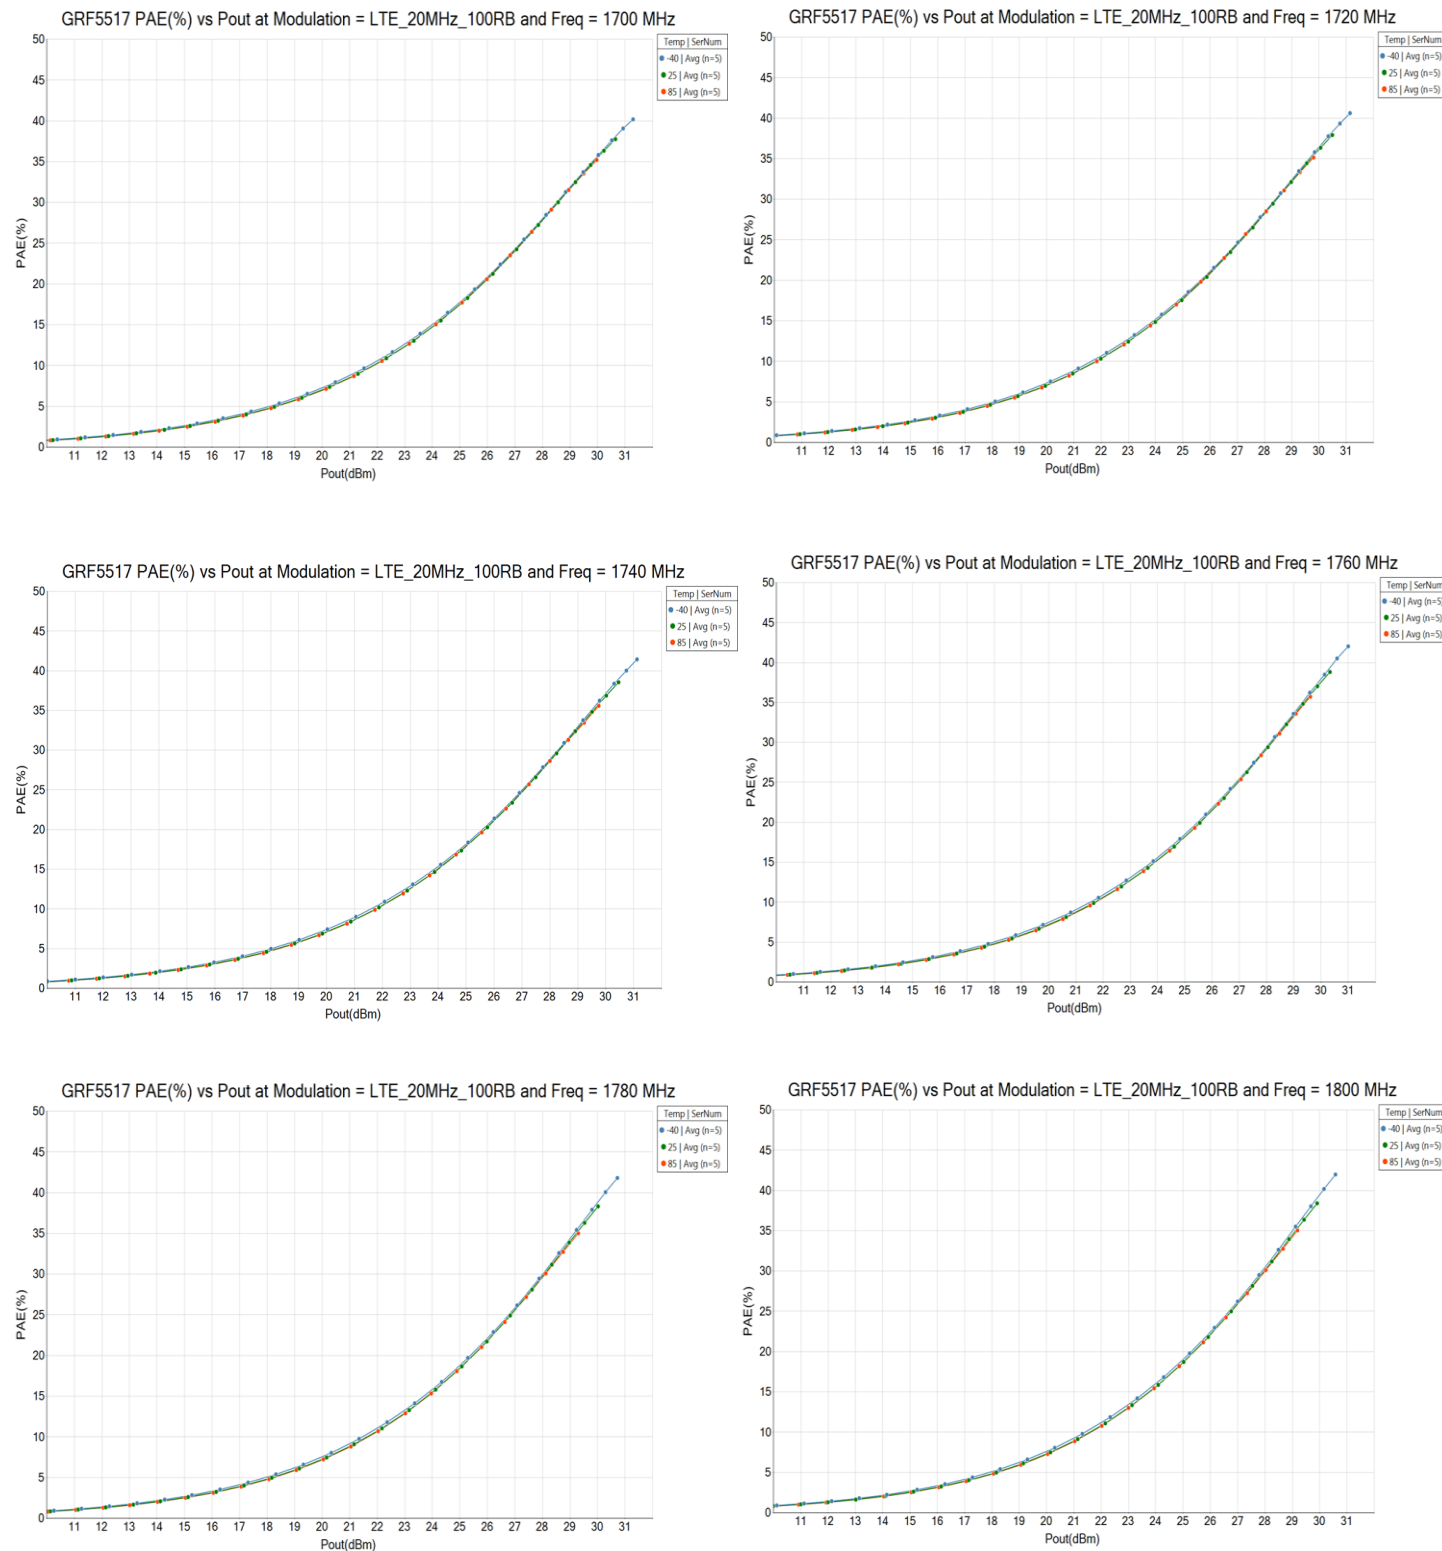


GRF5517W Typical Operating Curves: ACLR vs. P_{OUT} (9.8 dB PAR)

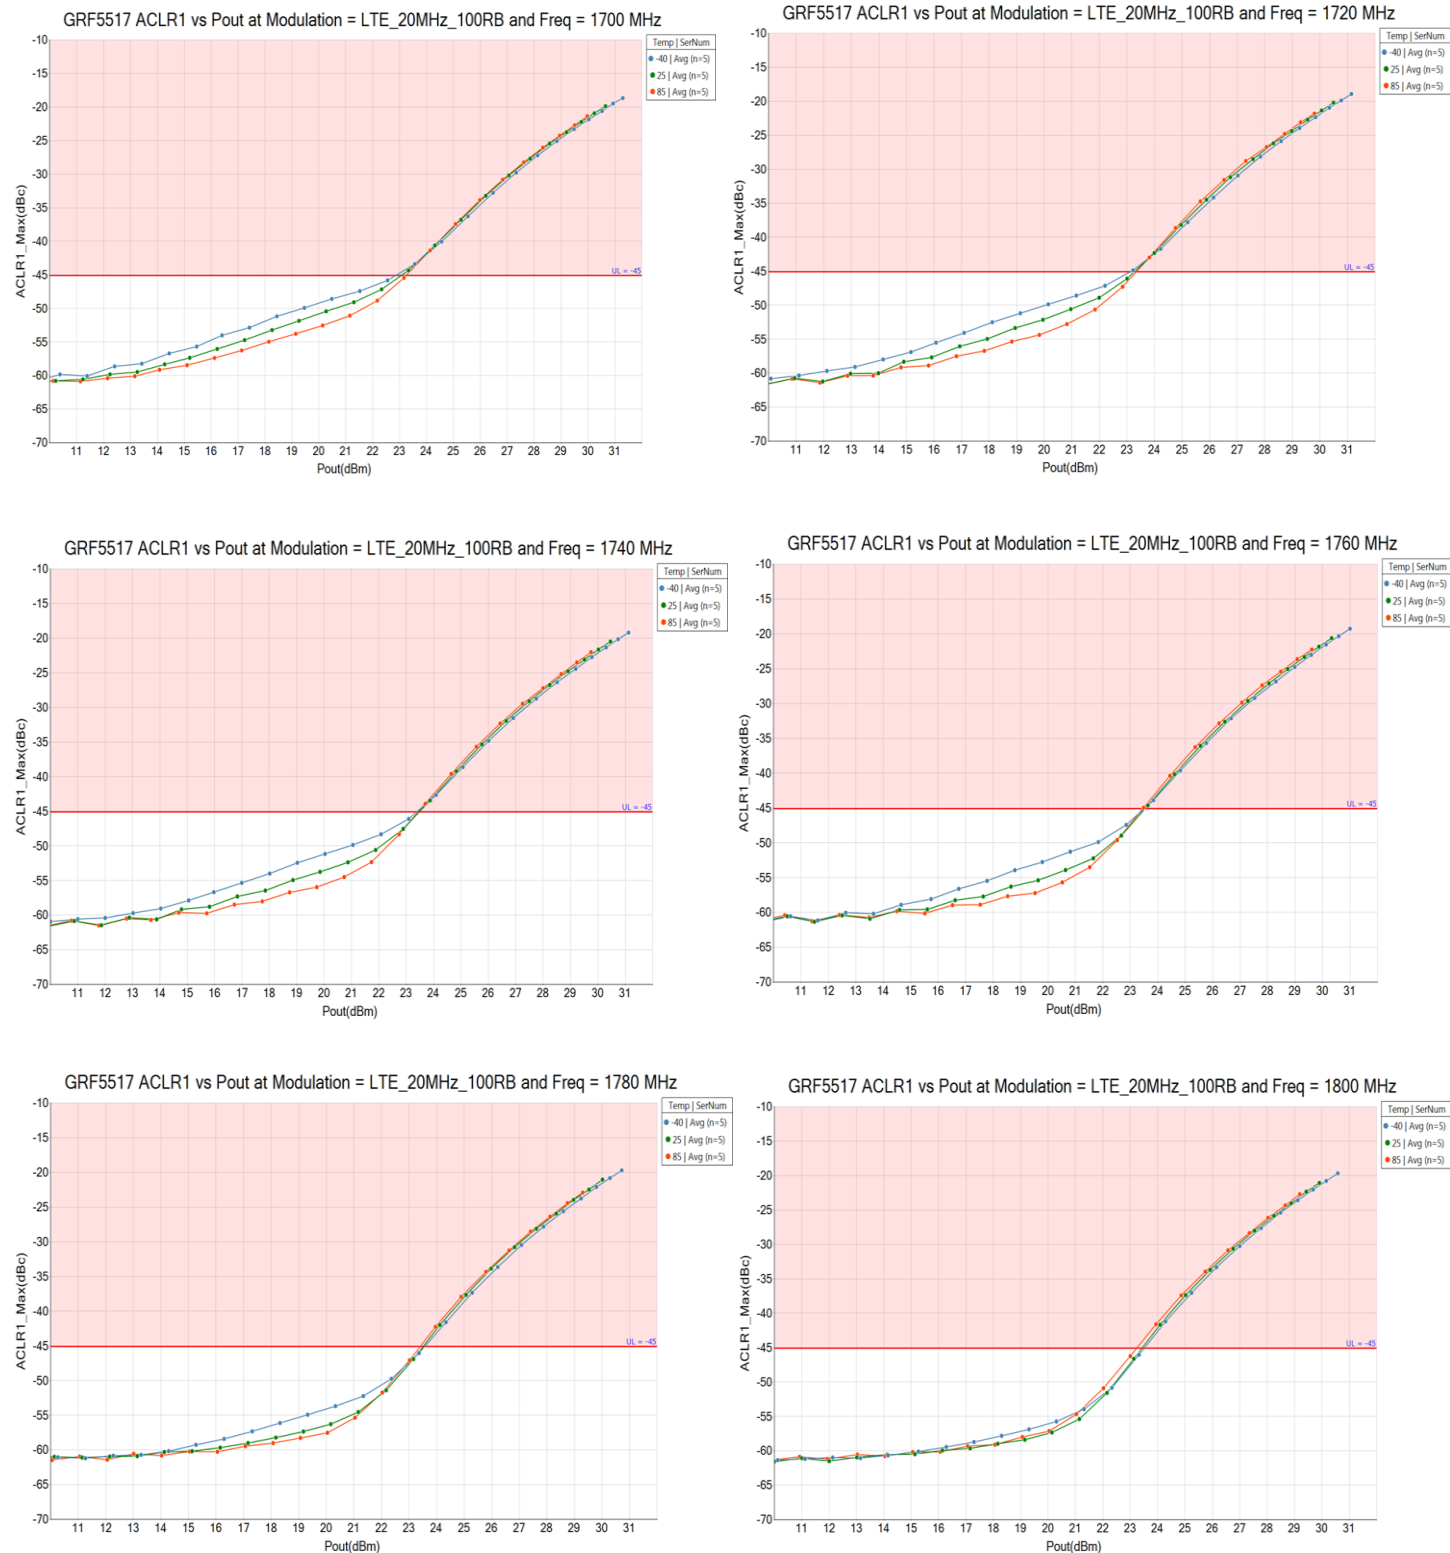







GRF5517W Typical Operating Curves: *EVM* vs. P_{OUT} (9.8 dB PAR)

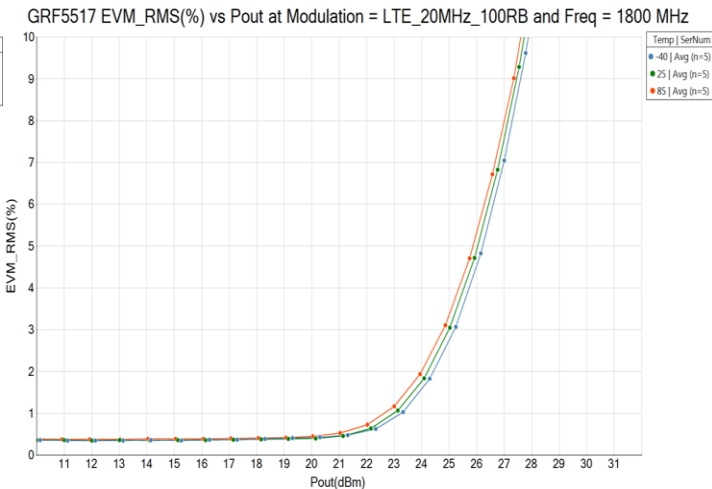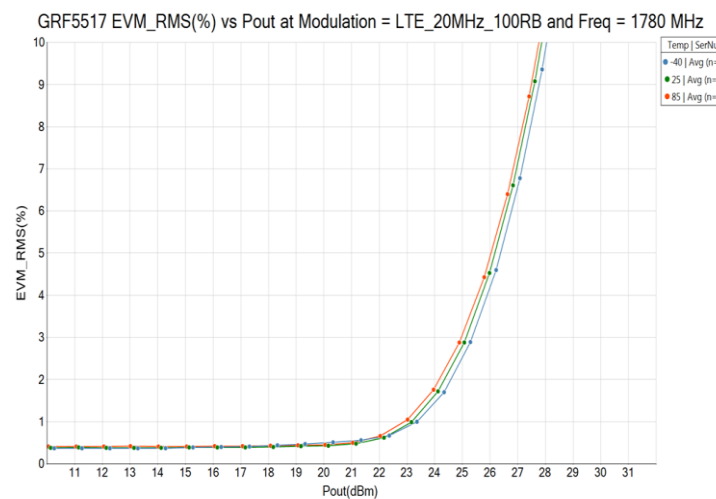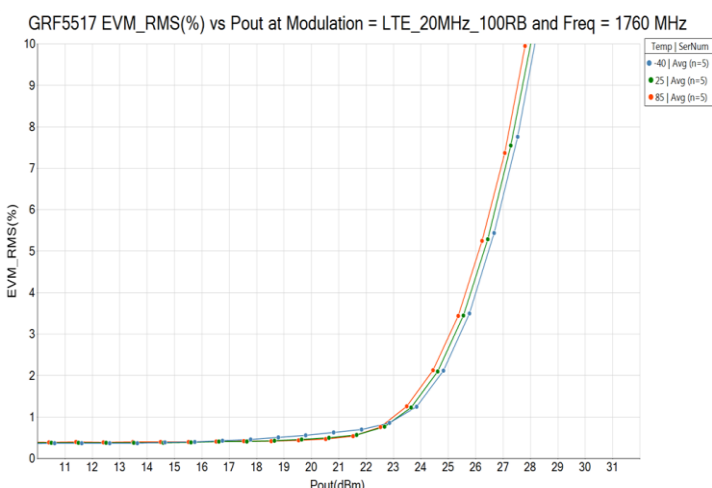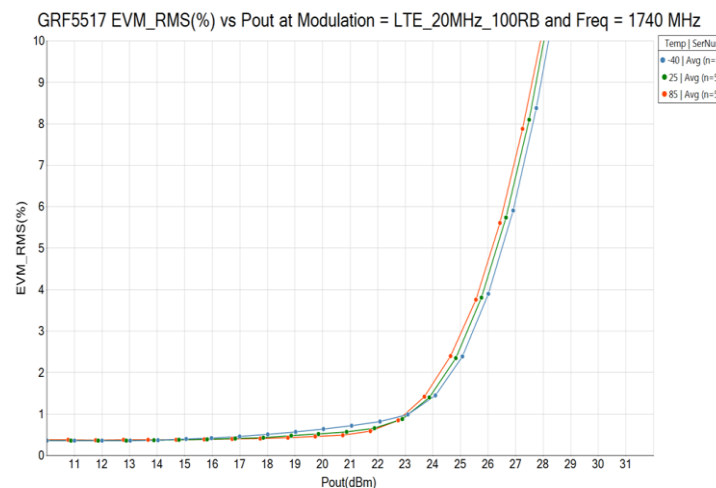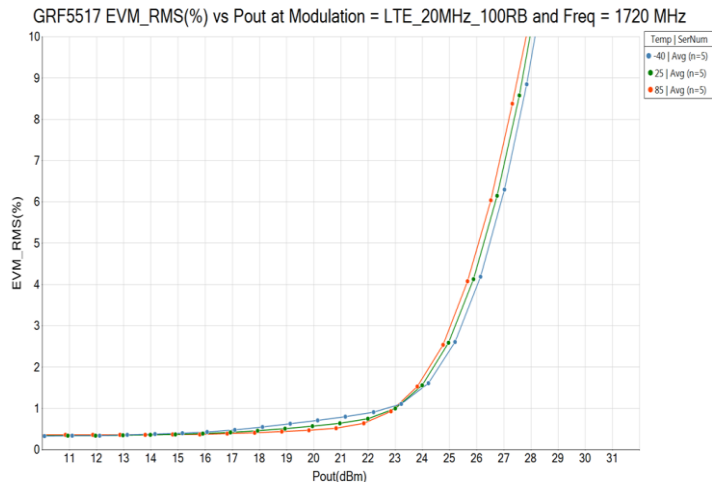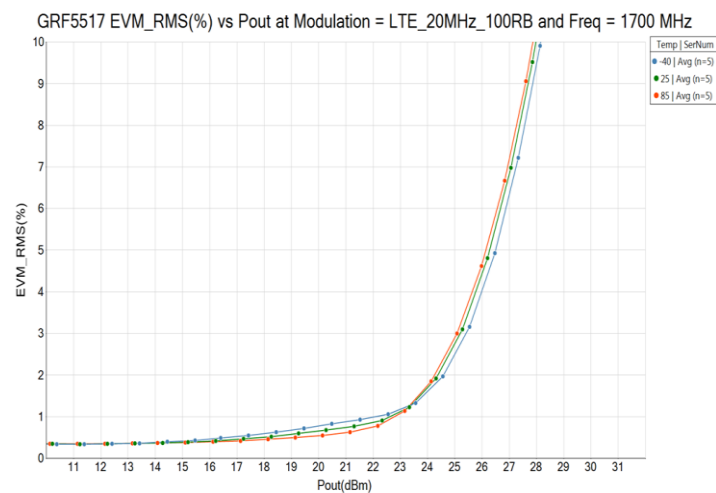





GRF5517W Typical Operating Curves: Stage1 I_{CC} vs. Stage2 P_{OUT} (9.8 dB PAR)

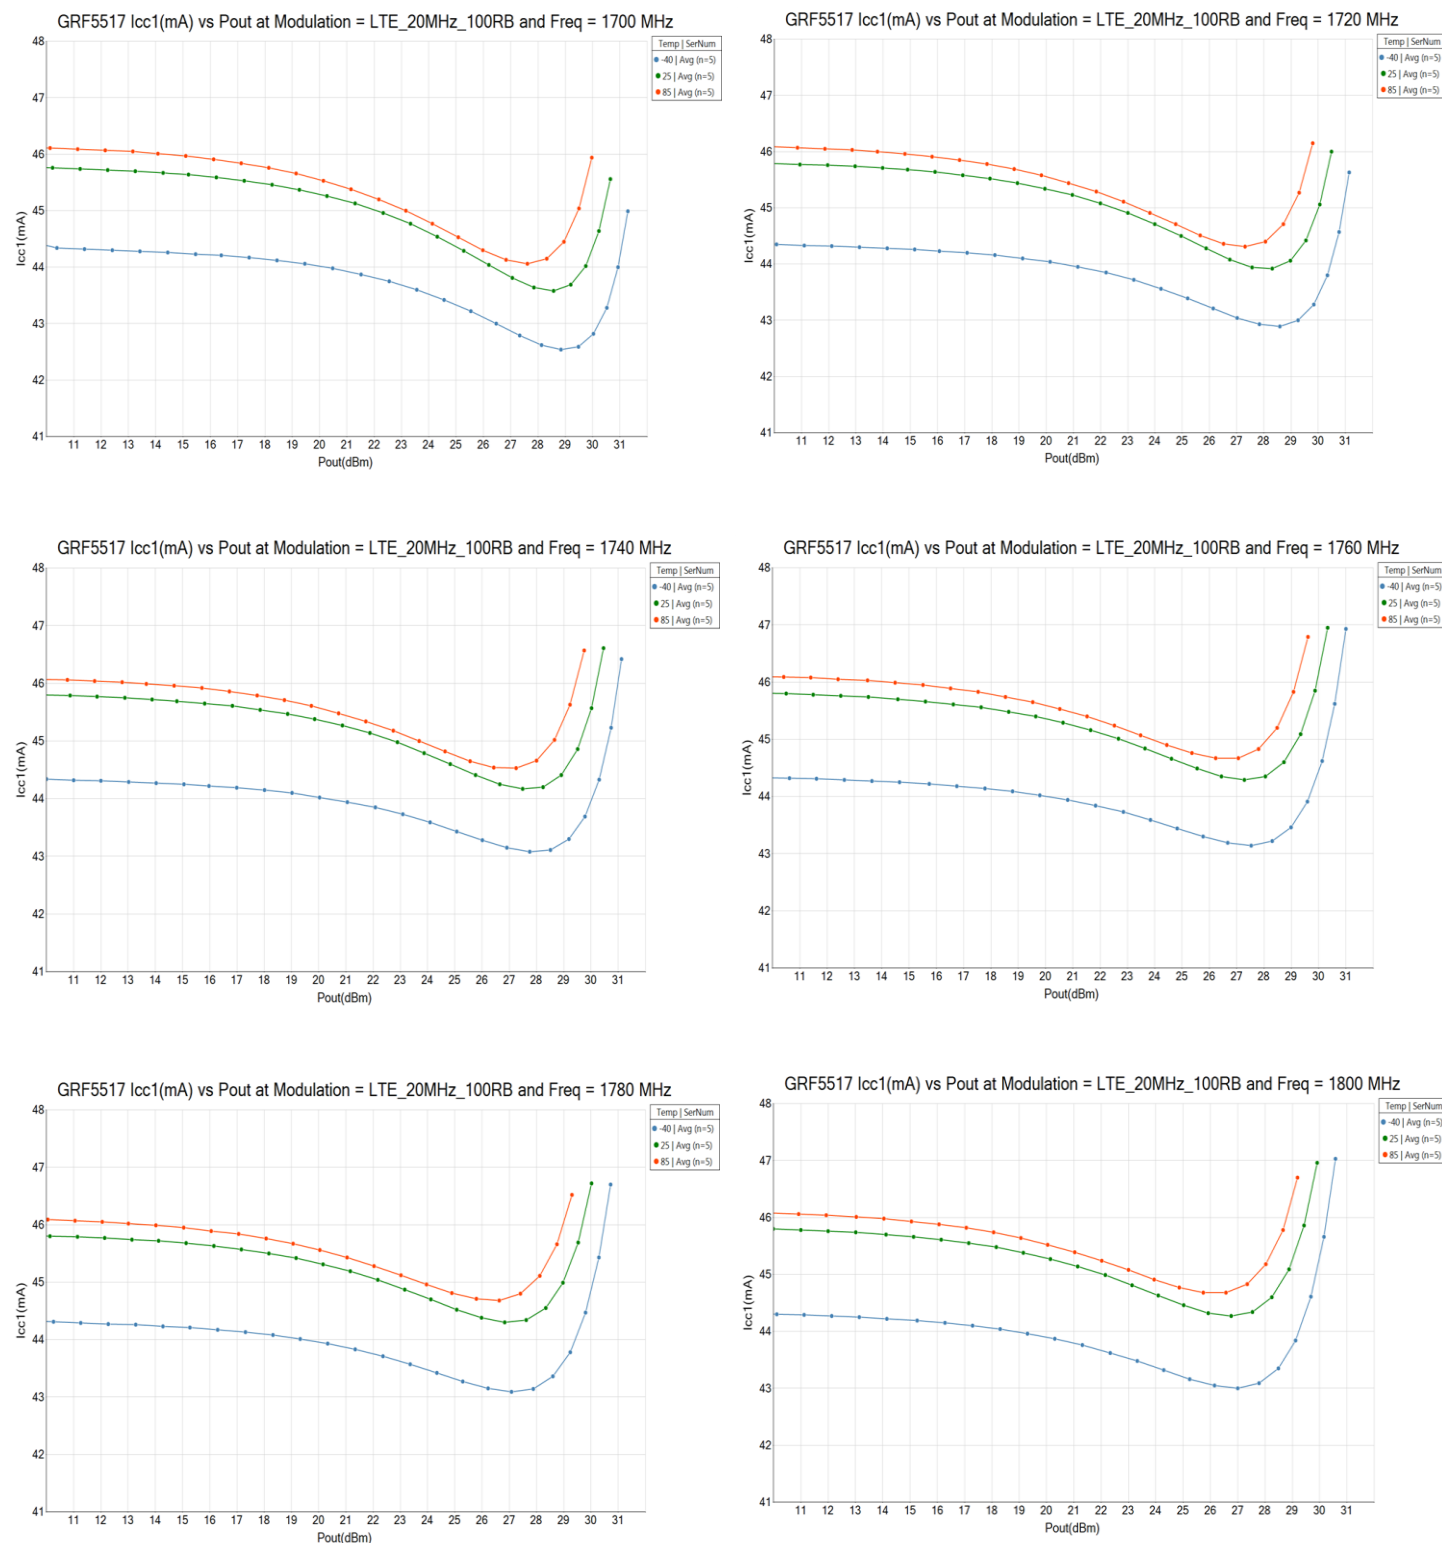





GRF5517W Typical Operating Curves: Stage2 I_{CC} vs. Stage2 P_{OUT} (9.8 dB PAR)

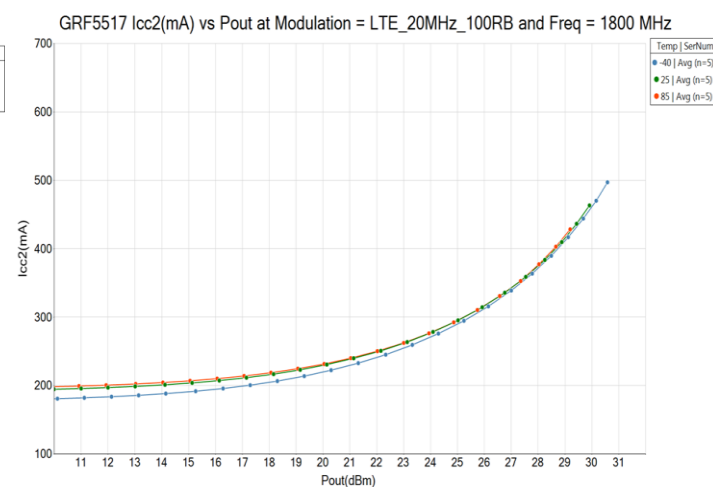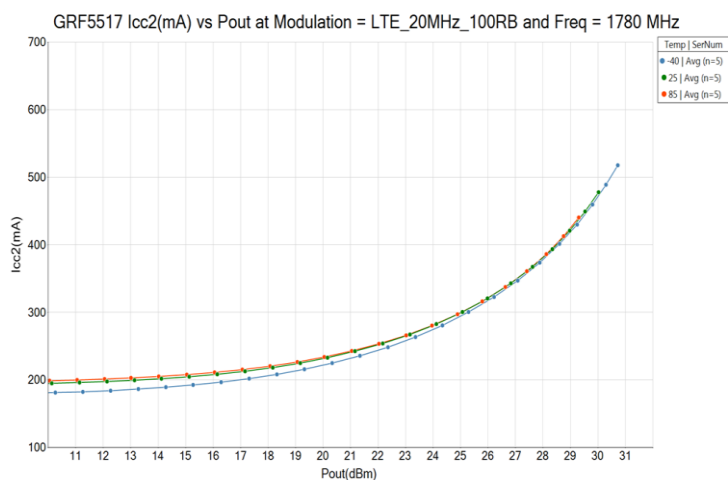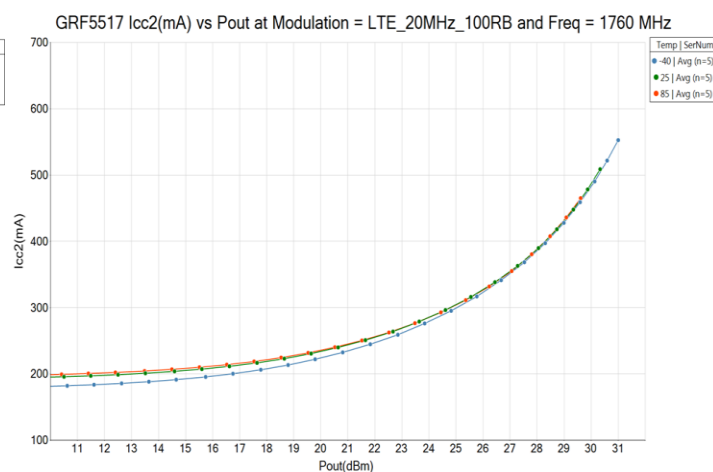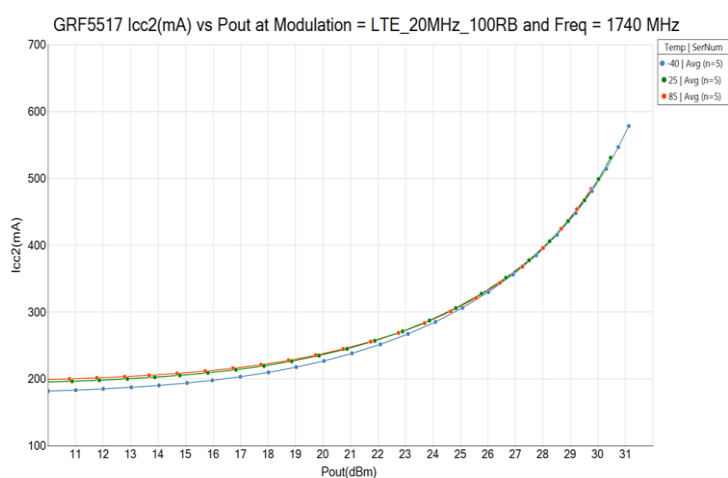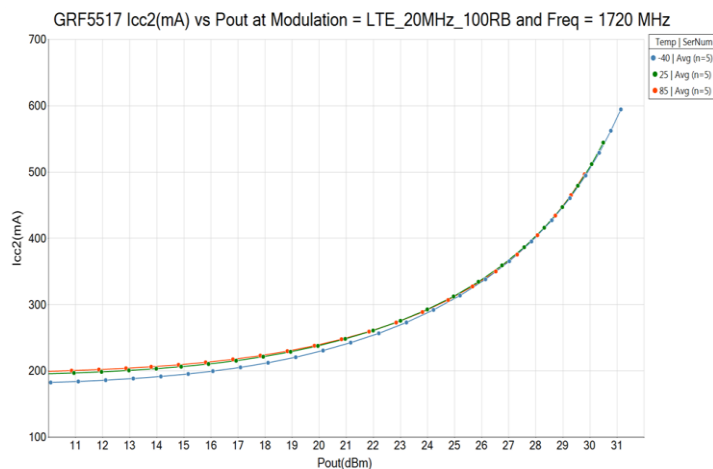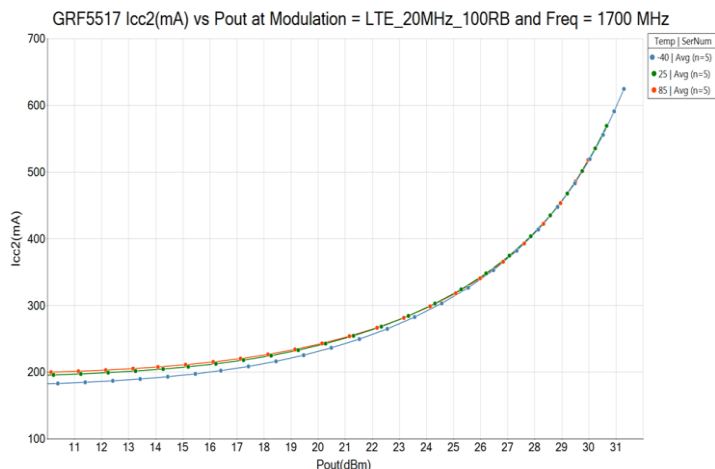


GRF5517W Typical Operating Curves: S-Parameters (1.7 to 1.8 GHz Tune)

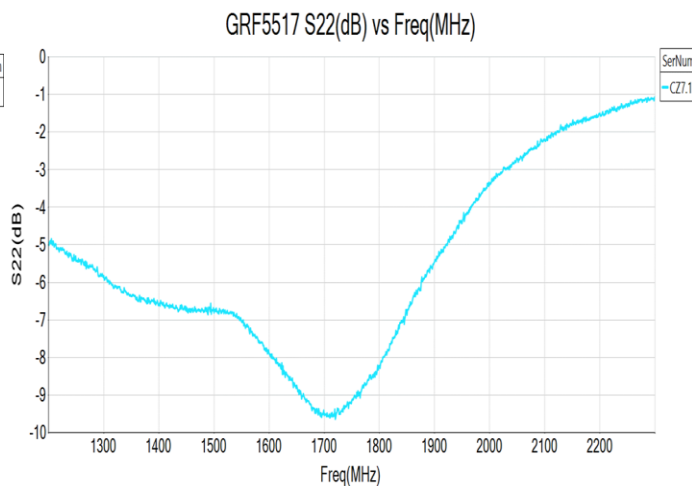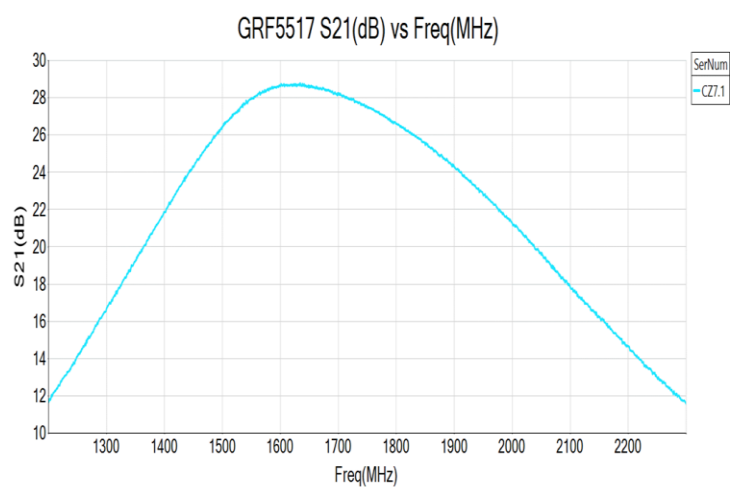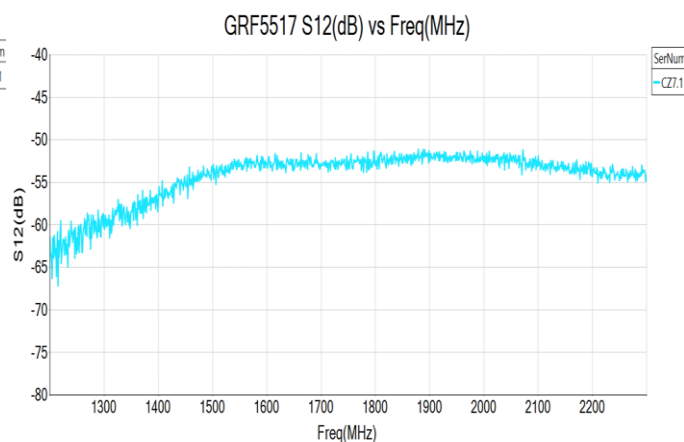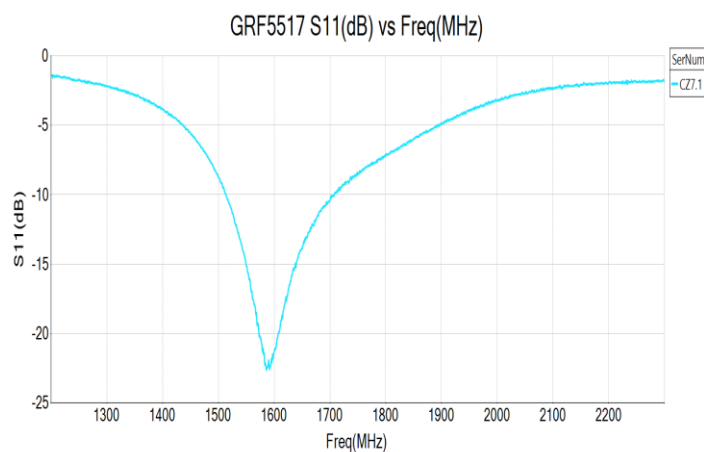


GRF5517W Typical Operating Curves: S-Parameters (1.7 to 1.8 GHz Tune)

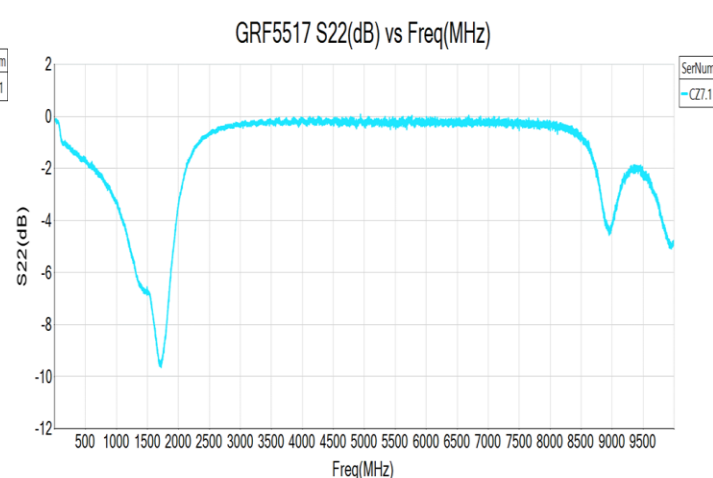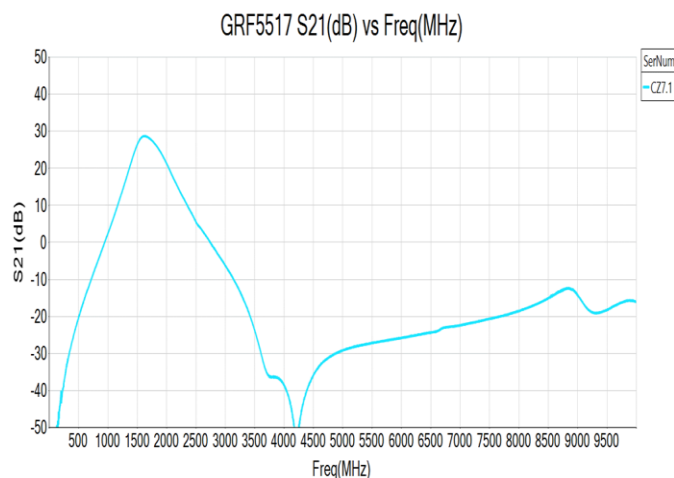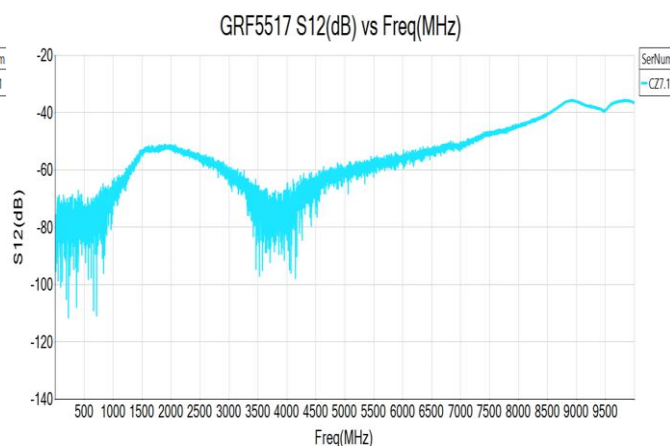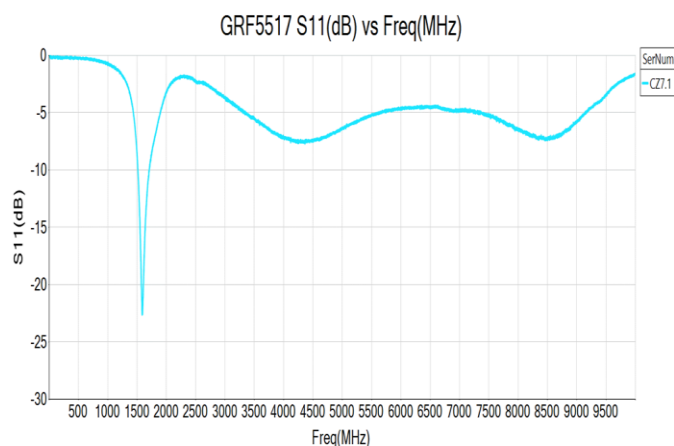


GRF5517W Typical Operating Curves: Maximum Die Temperatures vs. Pout (105C Reference Temperature on Standard Evaluation Board; CW Tone Input)

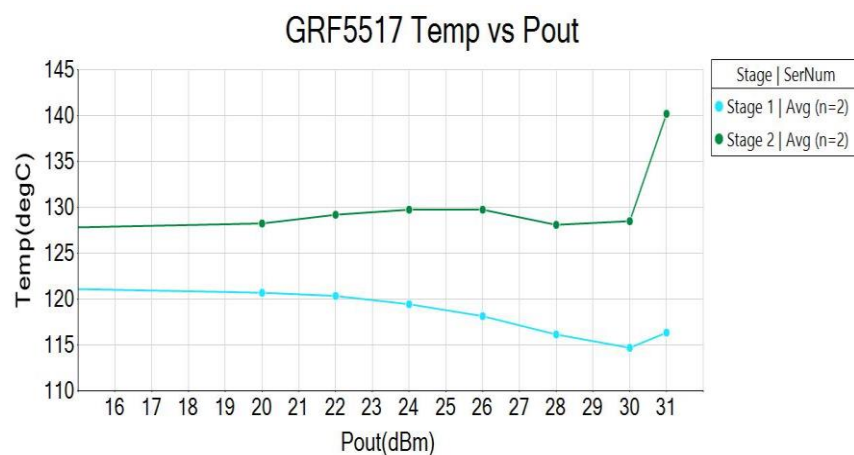

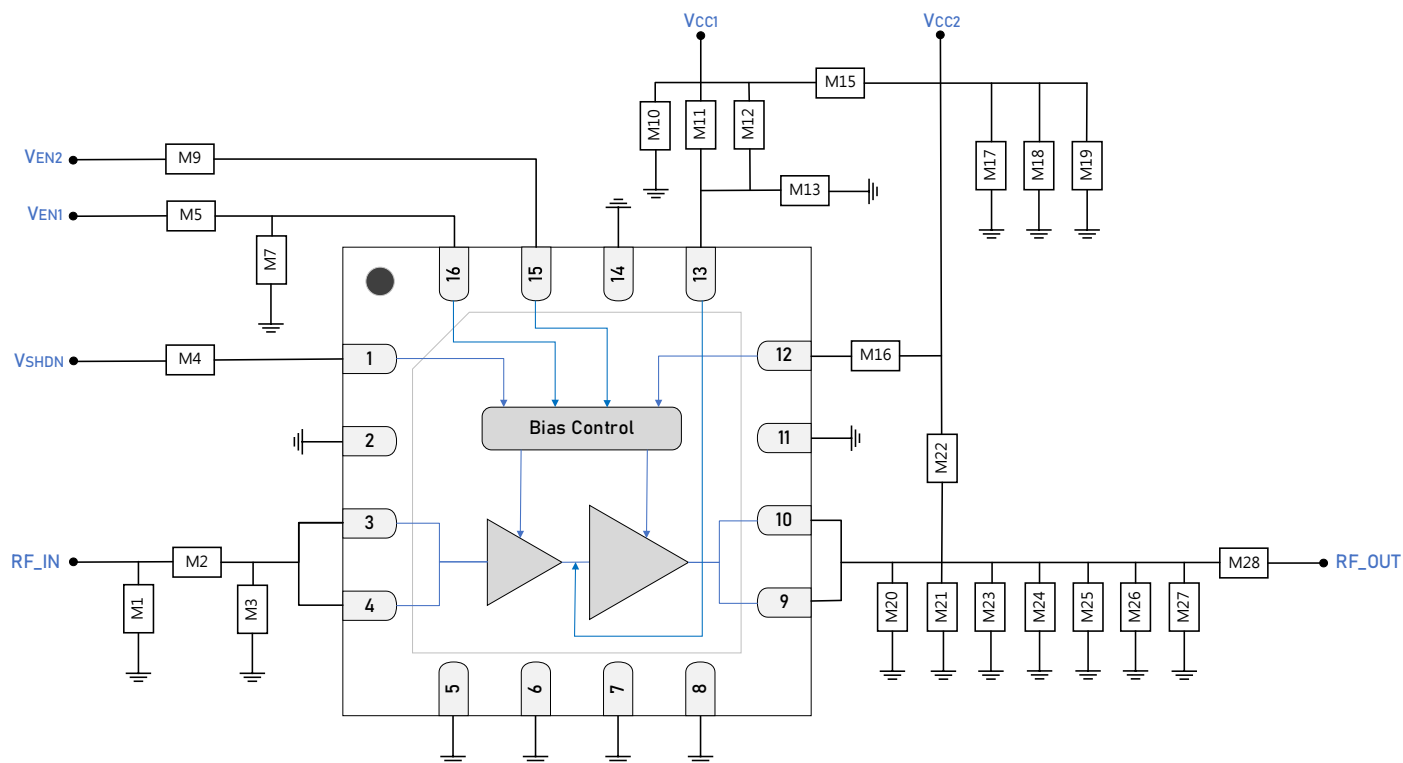

GRF5517W Standard Evaluation Board Schematic

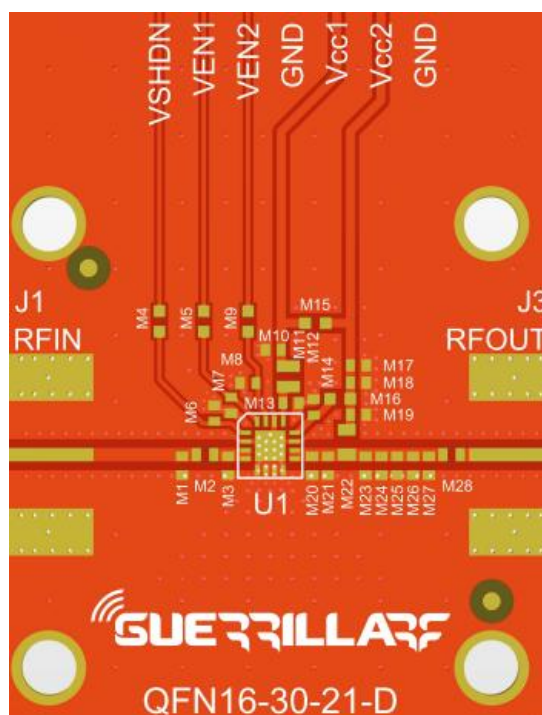

GRF5517W Evaluation Board Assembly Diagram

GRF5517W Evaluation Board Assembly Diagram Reference (Standard 1.7 to 1.8 GHz Tune)


Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	1.8 nH	0402	ok
M2	Capacitor	Murata	LQG	4.7 pF	0402	ok
M4	Resistor (Jumper)	Various	--	0 Ω	0402	ok
M5	Resistor	Various	1%	2.26 k Ω	0402	ok
M9	Resistor	Various	1%	2.94 k Ω	0402	ok
M11	Resistor (Jumper)	Various	--	0 Ω	0402	ok
M13	Capacitor	Murata	GRM	0.1 μ F	0402	ok
M15	Inductor	Murata	LQG	47 nH	0402	ok
M16	Resistor	Various	--	0 Ω	0402	ok
M18	Capacitor	Murata	GJM	10 μ F	0402	ok
M22	Inductor: High Q	Murata	LQW	10 nH	0402	ok
M25	Capacitor	Murata	GJM	3.6 pF	0402	ok
M28	Capacitor	Murata	GJM	15 pF	0402	ok
M3, M7, M10, M12, M17, M19, M20, M21, M23, M24, M26, M27	DNP					
Evaluation Board	QFN16-30-21-D					

Note 4: Standard evaluation board bias: $V_{CC} = 5$ V, $V_{ENABLE} = 5$ V.


GRF5517W Evaluation Board Assembly Diagram Reference (Extended Bandwidth 1.71 to 1.92 GHz Tune)

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	2.2 nH	0402	ok
M2	Capacitor	Murata	LQG	2.4 pF	0402	ok
M4	Resistor (Jumper)	Various	--	0 Ω	0402	ok
M5	Resistor	Various	1%	1.87 k Ω	0402	ok
M9	Resistor	Various	1%	3.57 k Ω	0402	ok
M11	Resistor (Jumper)	Various	--	0 Ω	0402	ok
M13	Capacitor	Murata	GRM	0.1 μ F	0402	ok
M15	Inductor	Murata	LQG	47 nH	0402	ok
M16	Resistor	Various	--	0 Ω	0402	ok
M18	Capacitor	Murata	GJM	10 μ F	0402	ok
M22	Inductor: High Q	Murata	LQW	10 nH	0402	ok
M23	Capacitor	Murata	GJM	3.6 pF	0402	ok
M28	Capacitor	Murata	GJM	15 pF	0402	ok
M3, M7, M10, M12, M17, M19, M20, M21, M23, M24, M26, M27	DNP					
Evaluation Board	QFN16-30-21-D					

Note 5: Standard evaluation board bias: $V_{CC} = 5$ V, $V_{ENABLE} = 5$ V. Please consult with GRF Sales or GRF Applications Engineering for any additional extended bandwidth data.

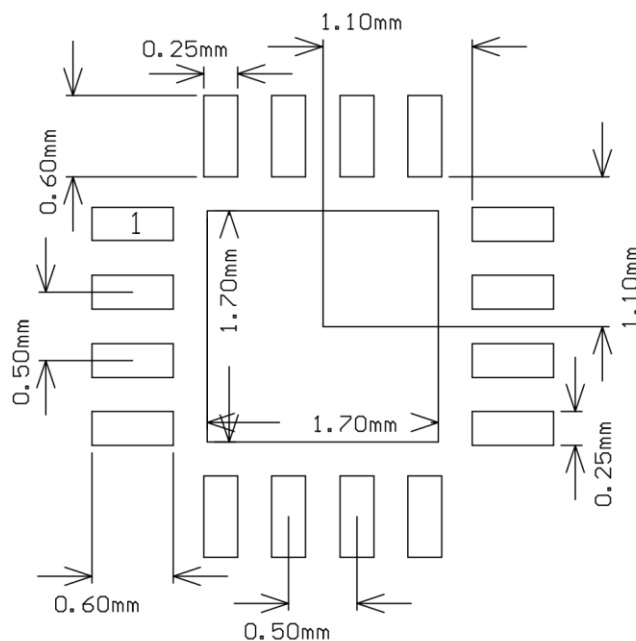

3 x 3 mm QFN-16 Suggested PCB Footprint (Top View)

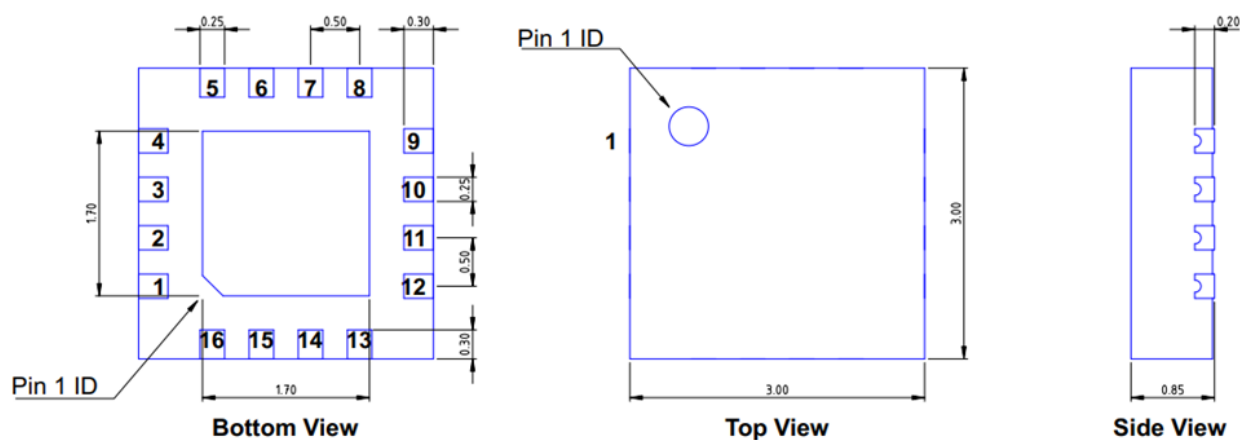

QFN16 3x3mm
Dimensions in millimeters
Dimensional Tolerance: ± 0.05

3 x 3 mm QFN-16 Package Dimensions

Package Marking Diagram




- Line 1: "YY" = YEAR. "WW" = WORK WEEK the device was assembled.
- Line 2: "GRF" = Guerrilla RF.
- Line 3: "XXXX" = Device PART NUMBER and "W" = W for automotive.

Tape and Reel Information


Guerrilla RF's tape and reel specification complies with Electronic Industries Alliance (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.

For the Tape and Reel Reference Table, please refer to: <https://www.guerrilla-rf.com/prodFiles/Manufacturing/MN001.pdf>

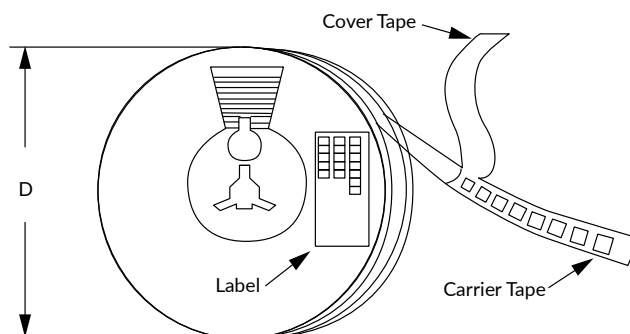

Tape and Reel Packaging with Reel Diameter Noted (D)

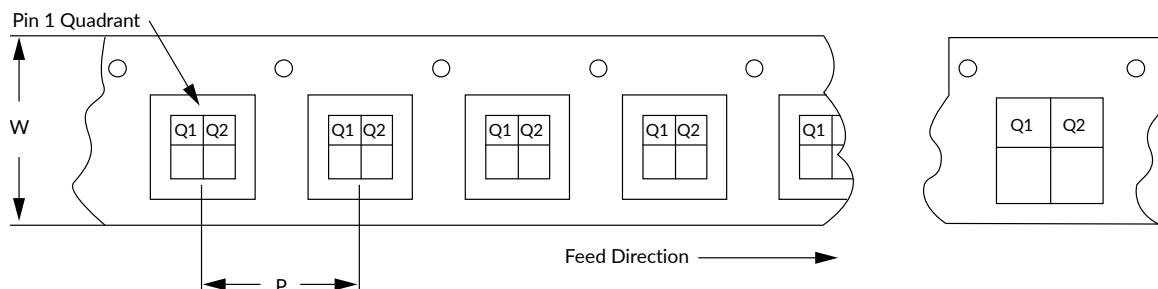

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information

Revision History

Revision Date	Description of Change
August 30, 2022	Preliminary Data Sheet.
January 24, 2023	Added the following condition to Maximum Dissipated Power for Stage 1 & 2: DC only (no RF applied).
May 3, 2023	Release Ø Data Sheet.
September 10, 2023	Release A Data Sheet.
October 12, 2023	Release B Data Sheet. Added 2 nd and 3 rd Harmonics specification.
January 13, 2025	Updated Data Sheet with cosmetic changes only. No change to device or device specifications.
May 9, 2025	Changed frequency range from 1.7 - 1.8 GHz to 1.6 - 1.92 GHz.
May 21, 2025	Updated frequency of family of part numbers listed on page 1.



Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.