

GRF9834

CATV and General Purpose Amplifier 5 to 2300 MHz

FEATURES

- 5 to 2300 MHz Operation
- Low Noise Figure and High Linearity
- 3.9 x 4.9 mm SOIC-8 EP Package
- Process: GaAs pHEMT

Reference: 5 V / 280 mA / 1218 MHz

- Gain: 14.3 dB (13.2 dB at 50 MHz)
- OIP2L: 65 dBm
- OIP2H: 62 dBm
- OIP3: 43.4 dBm
- OP1dB: 24.2 dBm
- Evaluation Board Noise Figure: 2.6 dB

APPLICATIONS


- Cable, Terrestrial and Satellite
- DOCSIS
- CATV, Cable Modem and Set Top Box
- General Purpose Gain Block


DESCRIPTION

The GRF9834 is a broadband, linear, dual-balanced gain block designed for use in 75 Ω CATV and 50 Ω general purpose applications.

Please consult with the GRF applications engineering team for application notes and custom tuning/evaluation board data. De-embedded S-Parameters are available on the website.

BLOCK DIAGRAM

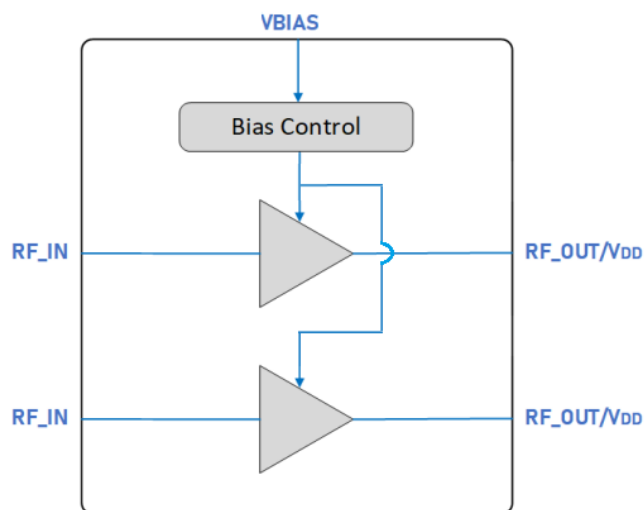

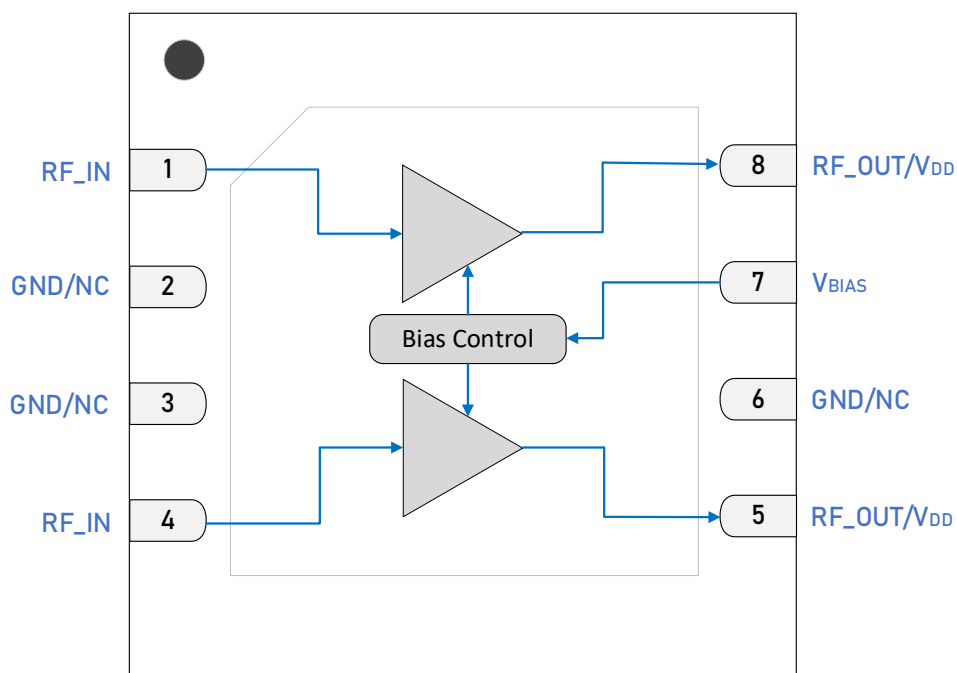

3.9 x 4.9 mm SOIC-8 EP Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
1, 4	RF_IN	RF Input	External match must provide DC block.
2, 3, 6	GND/NC	Ground or No Connect	No internal connection to die. We recommend connecting these pins to ground.
5, 8	RF_OUT/V _{DD}	RF Output	Provides device V _{DD} via external bias inductor/ferrite bead. DC block required at evaluation board output.
7	V _{BIAS}	Bias Voltage	Applied through series resistor.
PKG BASE	GND	Ground	Provides DC and RF ground, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V_{DD}	0	9	V
Bias Voltage	V_{BIAS}	0	9	V
RF Input Power: CW, Load VSWR < 2:1, $V_{DD} = 5\text{ V}$	$P_{IN\text{ MAX}}$		20	dBm
Operating Temperature (package base)	$T_{PKG\text{ BASE}}$	-40	85	°C
Maximum Channel Temperature (MTTF > 10^6 hours)	T_{MAX}		170	°C
Maximum Dissipated Power	$P_{DISS\text{ MAX}}$		TBD	mW

Electrostatic Discharge

Charged Device Model	CDM	TBD		V
Human Body Model	HBM	TBD		V

Storage

Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		TBD	--



Caution! ESD Sensitive Device.

Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 — Package and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions. Additional information for this topic can be found at this link - [Environmental and Restricted Substance Statement Library](#)

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V_{DD}	4.5	5	7	V	
Bias Voltage	V_{BIAS}	4.5	5	7	V	
Operating Temperature (package base)	$T_{PKG\ BASE}$	-40		85	°C	
RF Frequency Range	F_{RF}	5	1218	2300	MHz	Typical application schematic with external matching components (notes 1 & 2).
RF_IN Port Impedance	Z_{RFIN}		75		Ω	Single-ended.
RF_OUT Port Impedance	Z_{RFOUT}		75		Ω	Single-ended.

Note 1: Operation outside this range is possible, but with degraded performance of some parameters.

Note 2: Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: typical application schematic, $V_{DD} = 5\text{ V}$, $V_{BIAS} = 5\text{ V}$, $I_{DD} = 280\text{ mA}$, $F_{TEST} = 1218\text{ MHz}$, $T_{PKG\text{ BASE}} = 25\text{ }^{\circ}\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current	I_{DD}		280		mA	$V_{DD} = 5\text{ V}$, $V_{BIAS} = 5\text{ V}$.
Bias Current	I_{BIAS}		2		mA	$V_{DD} = 5\text{ V}$, $V_{BIAS} = 5\text{ V}$.

Thermal Data

Thermal Resistance (Infrared Scan)	Θ_{JC}		TBD		$^{\circ}\text{C}/\text{W}$	On standard evaluation board (note 3).
------------------------------------	---------------	--	-----	--	-----------------------------	---



Note 3: MTTF > 10^6 hours for $T_{CHANNEL} \leq 170\text{ }^{\circ}\text{C}$.

Nominal Operating Parameters – RF



The following conditions apply unless noted otherwise: typical application schematic, $V_{DD} = 5\text{ V}$, $V_{BIAS} = 5\text{ V}$, $I_{DD} = 280\text{ mA}$, $F_{TEST} = 1218\text{ MHz}$, $75\ \Omega$ system, $T_{PKG\ BASE} = 25\ ^\circ\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Gain	S21		13.2		dB	50 MHz.
			14.3		dB	1218 MHz.
			16.2		dB	1800 MHz.
S-Parameters	S11		< -18		dB	50 - 1800 MHz.
	S12		< -17.7		dB	50 - 1800 MHz.
	S22		< -21		dB	50 - 1800 MHz.
Noise Figure	NF		2.7		dB	50 MHz (evaluation board F to F).
			2.6		dB	1218 MHz (evaluation board F to F).
			2.8		dB	1800 MHz (evaluation board F to F).
Output 2 nd Order Intercept Point Low	OIP2L		71		dBm	12 dBm P_{OUT} per tone. 50 MHz at 30 MHz spacing.
			65		dBm	12 dBm P_{OUT} per tone. 1218 MHz at 30 MHz spacing.
			67		dBm	12 dBm P_{OUT} per tone. 1800 MHz at 30 MHz spacing.
Output 2 nd Order Intercept Point High	OIP2H		79		dBm	12 dBm P_{OUT} per tone. 50 MHz at 30 MHz spacing.
			62		dBm	12 dBm P_{OUT} per tone. 1218 MHz at 30 MHz spacing.
			49		dBm	12 dBm P_{OUT} per tone. 1800 MHz at 30 MHz spacing.
Output 3 rd Order Intercept Point	OIP3		44.6		dBm	12 dBm P_{OUT} per tone. 50 MHz at 6 MHz spacing.
			43.2		dBm	12 dBm P_{OUT} per tone. 1218 MHz at 6 MHz spacing.
			39.3		dBm	12 dBm P_{OUT} per tone. 1800 MHz at 6 MHz spacing.
Output 1 dB Compression Power	OP1dB		25		dBm	50 MHz.
			24.2		dBm	1218 MHz.
			23.4		dBm	1800 MHz.



GRF9834 Typical Operating Curves: 5 V, 50 to 1800 MHz Tune

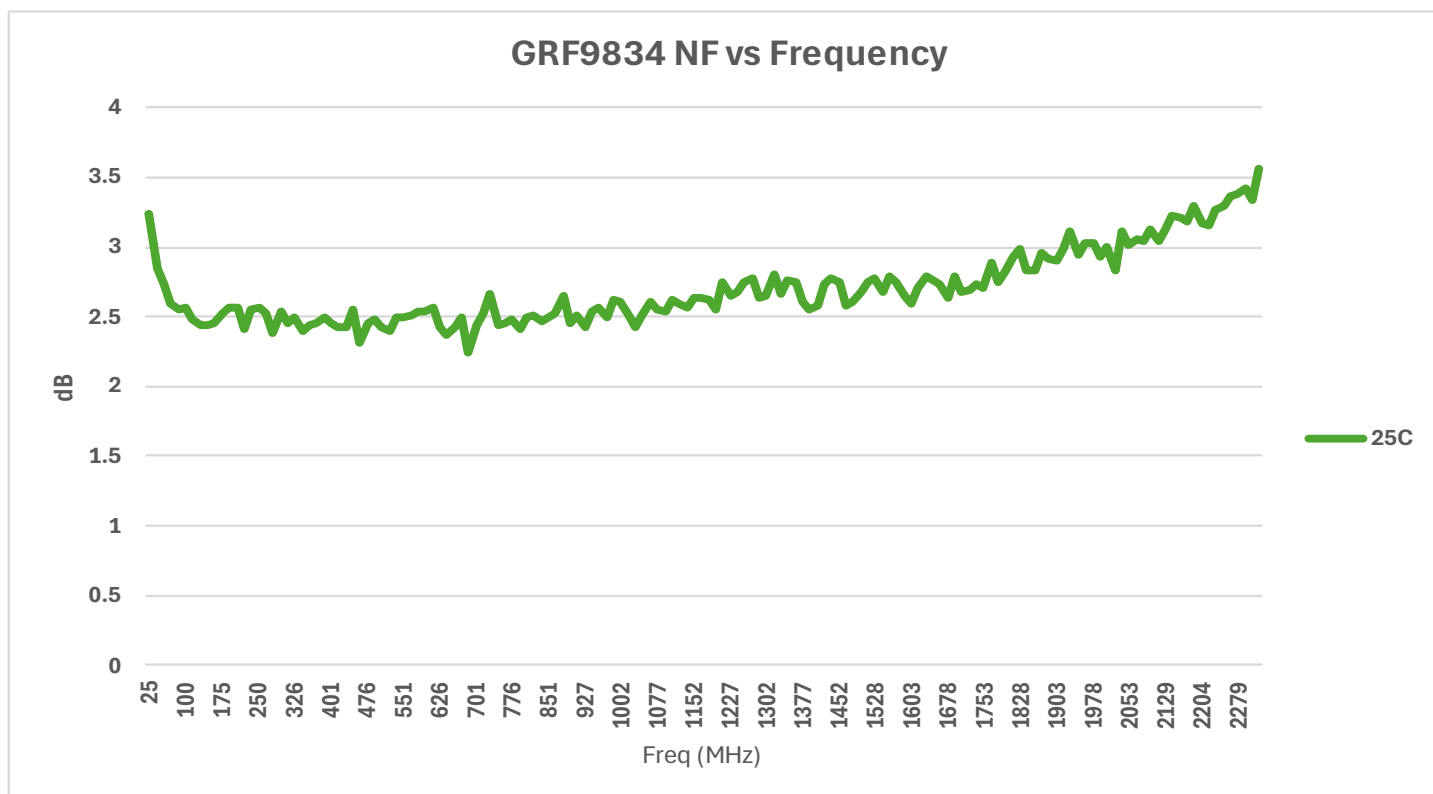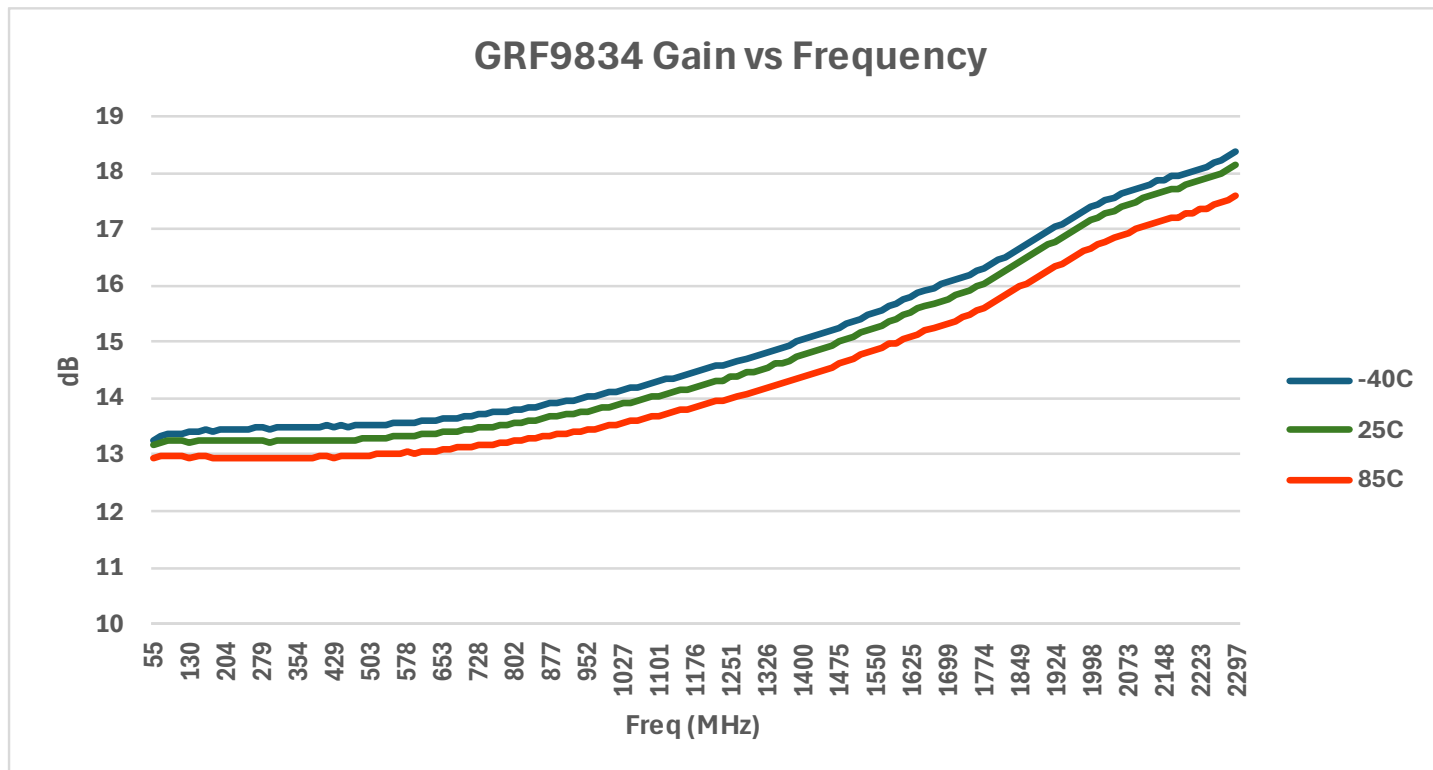


GRF9834 Typical Operating Curves: 5 V, 50 to 1800 MHz Tune

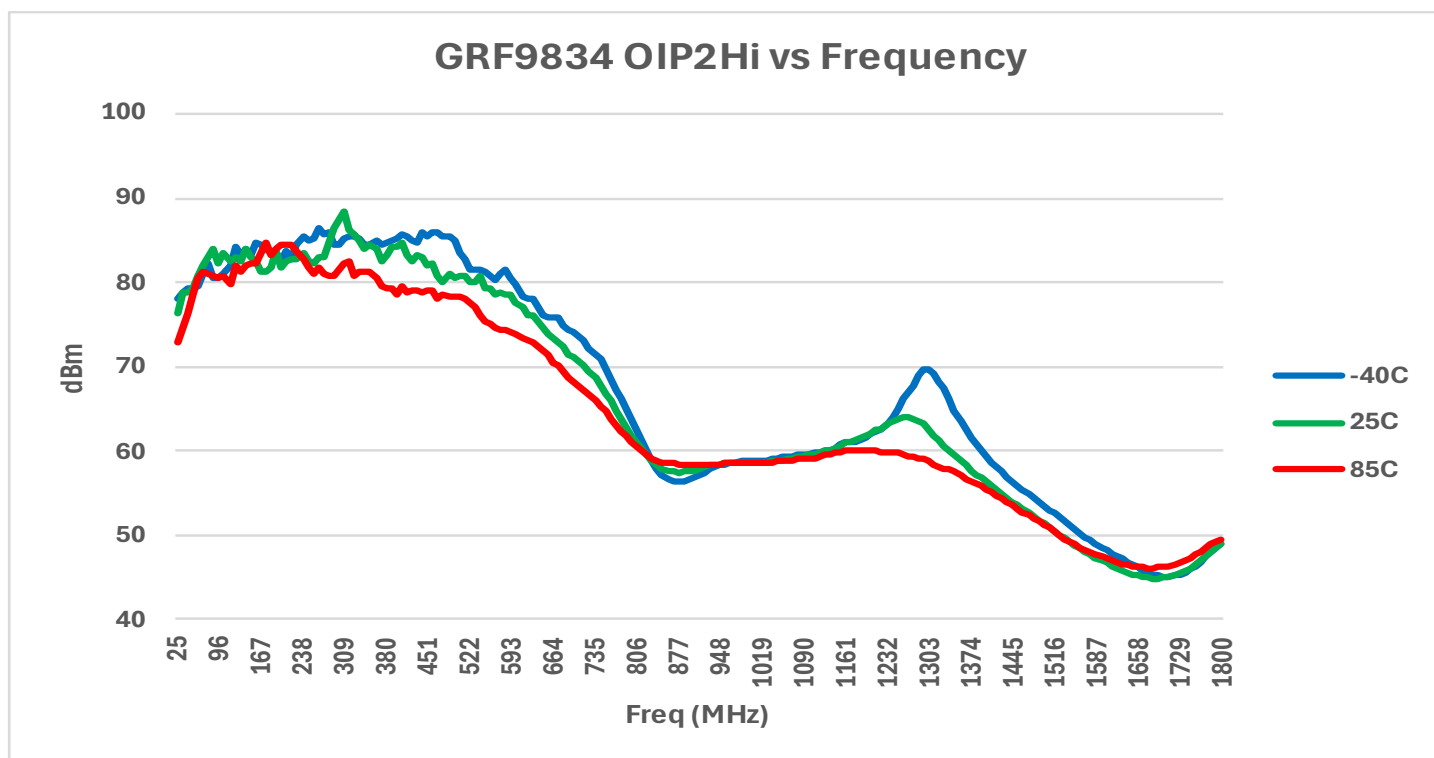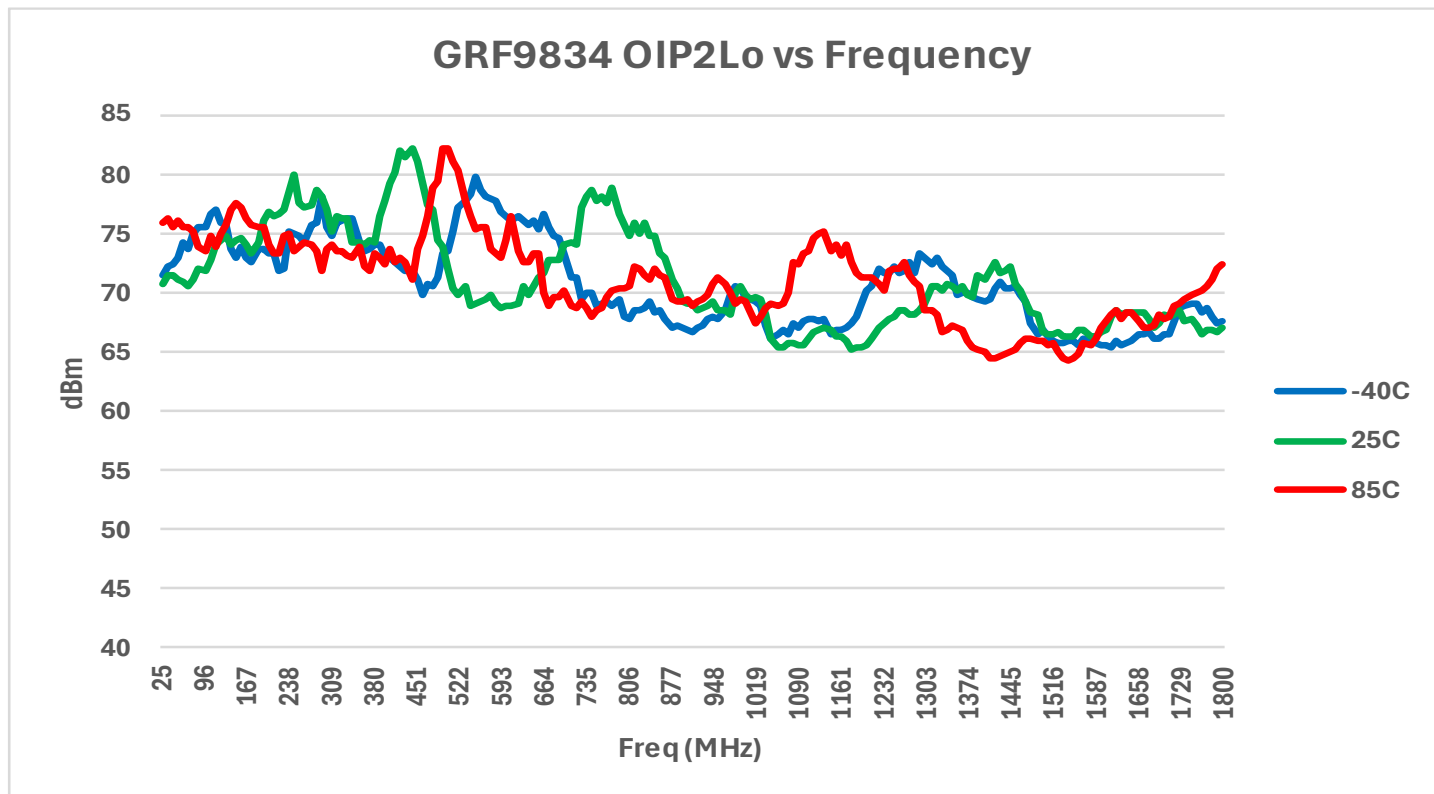


GRF9834 Typical Operating Curves: 5 V, 50 to 1800 MHz Tune

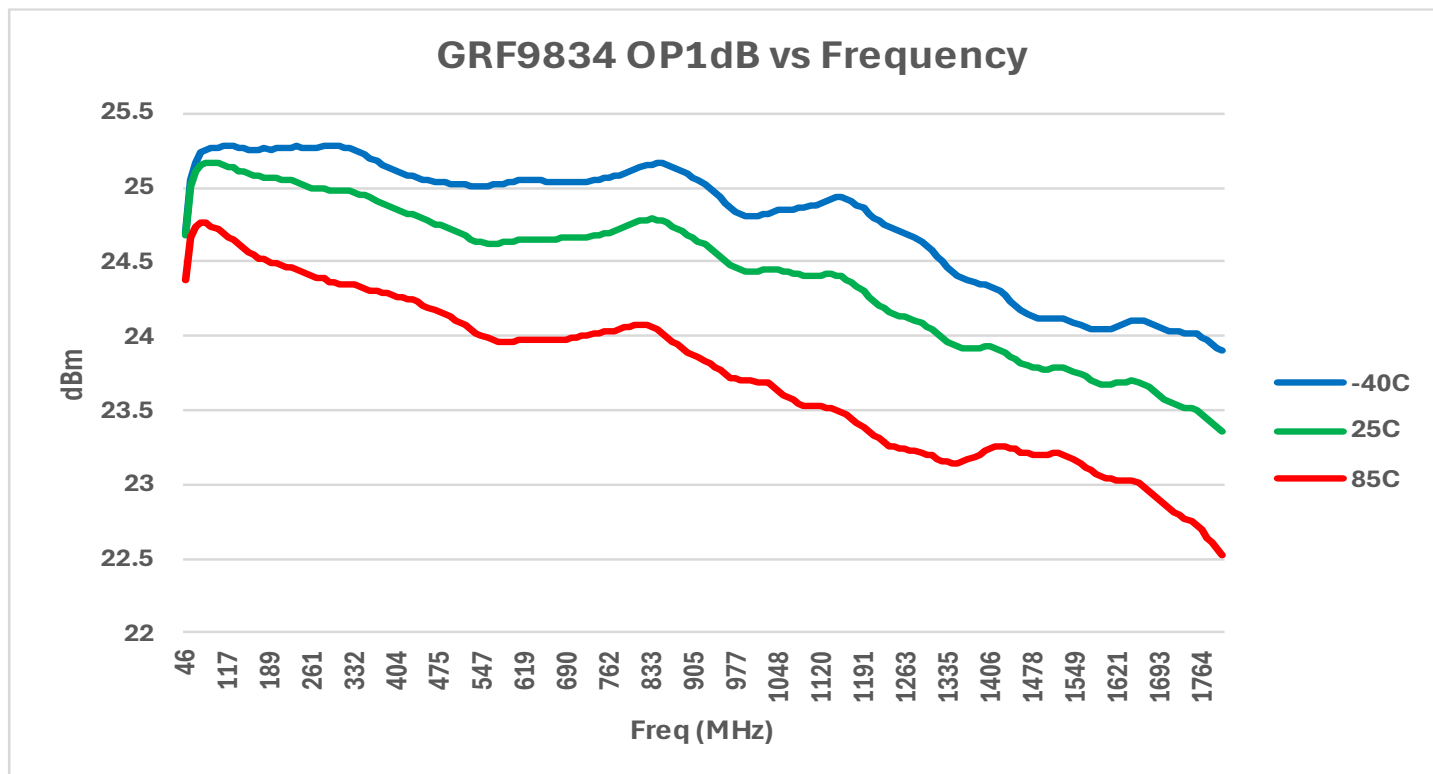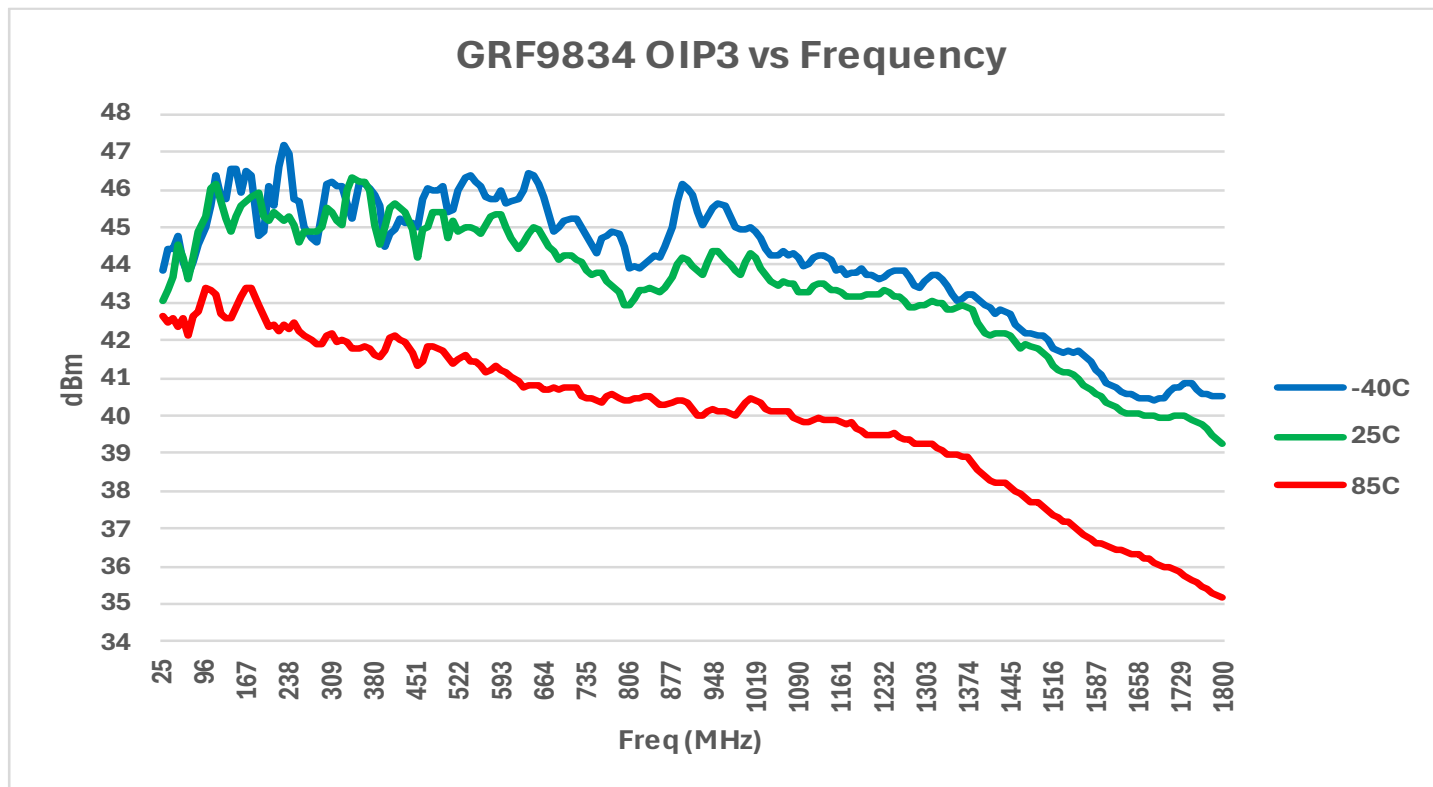


GRF9834 Typical Operating Curves: S-Parameters (50 to 2300 MHz in 75 Ω system)

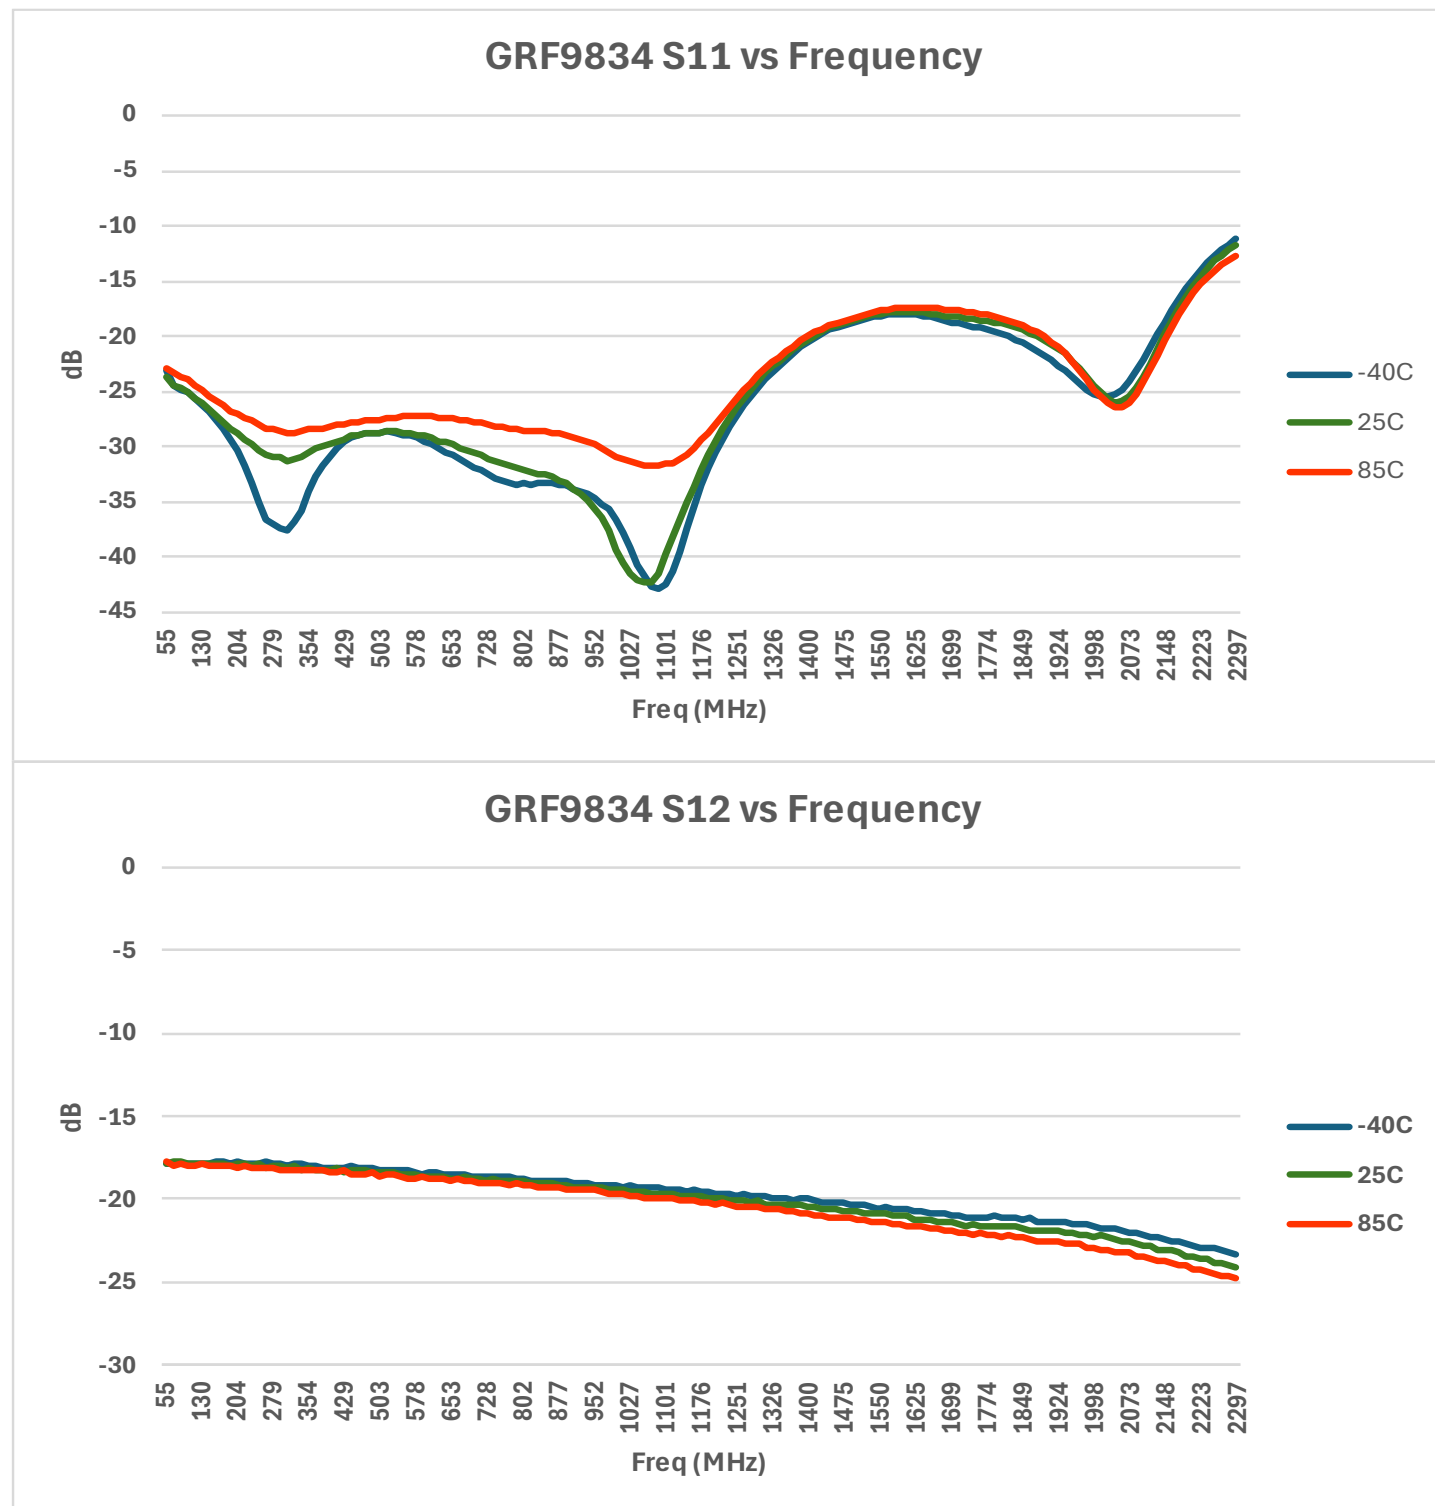


GRF9834 Typical Operating Curves: S-Parameters (50 to 2300 MHz in 75 Ω system)

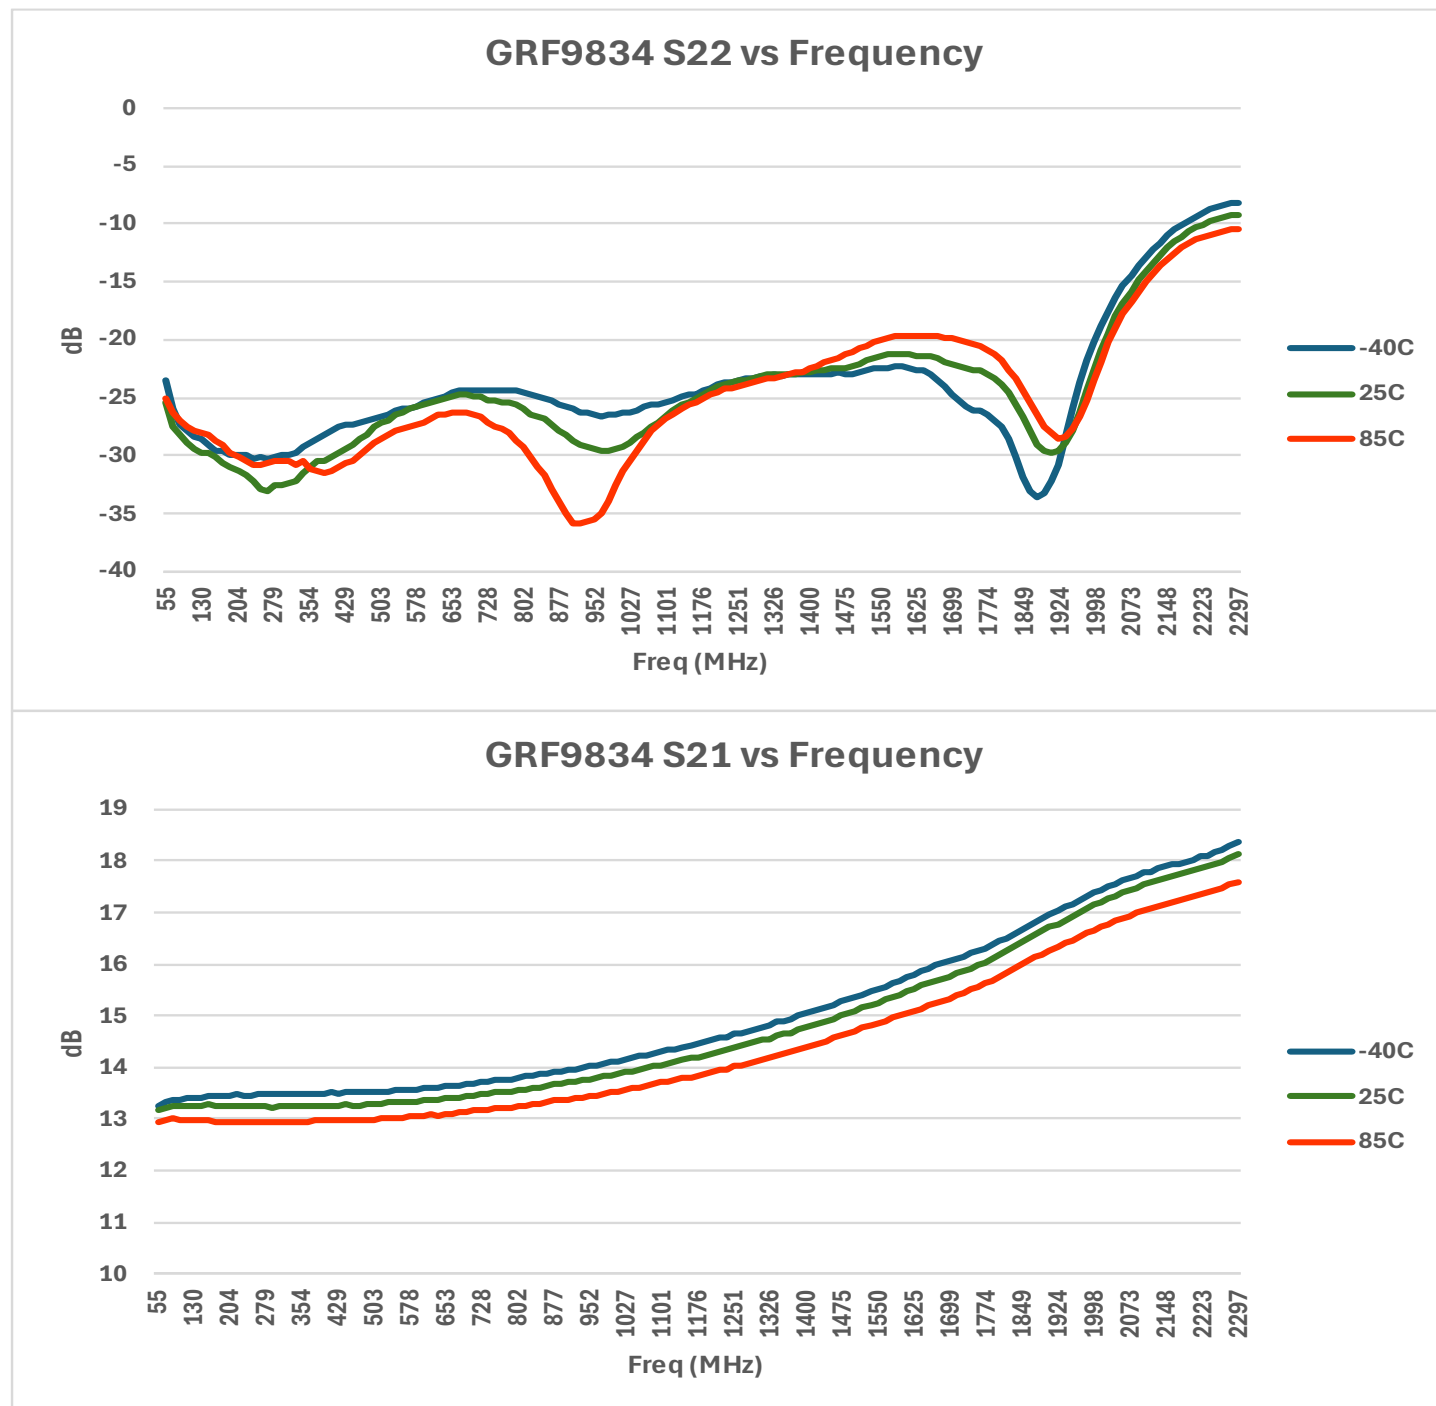


GRF9834 Typical Operating Curves: Stability Mu Factor (50 to 2300 MHz in 75 Ω system)

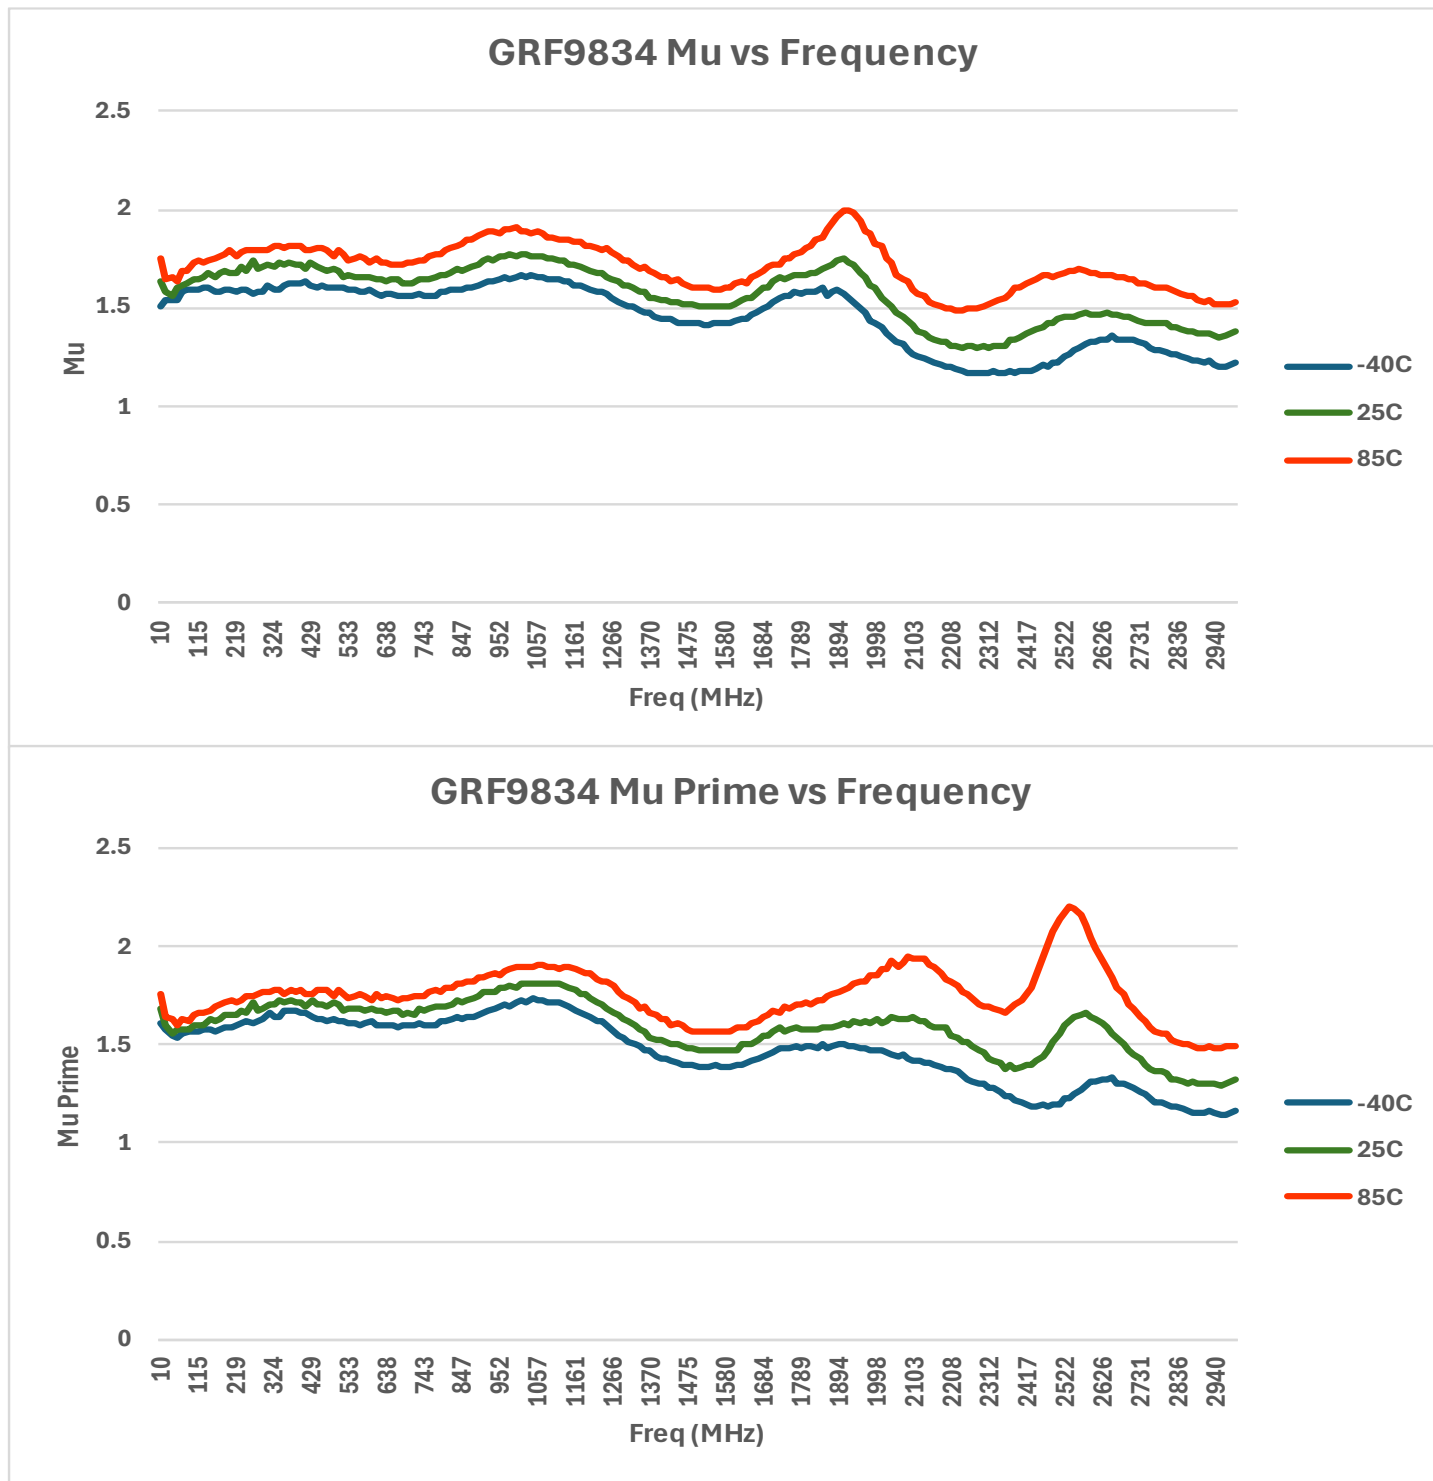

Note: Mu Factor ≥ 1.0 implies unconditional stability

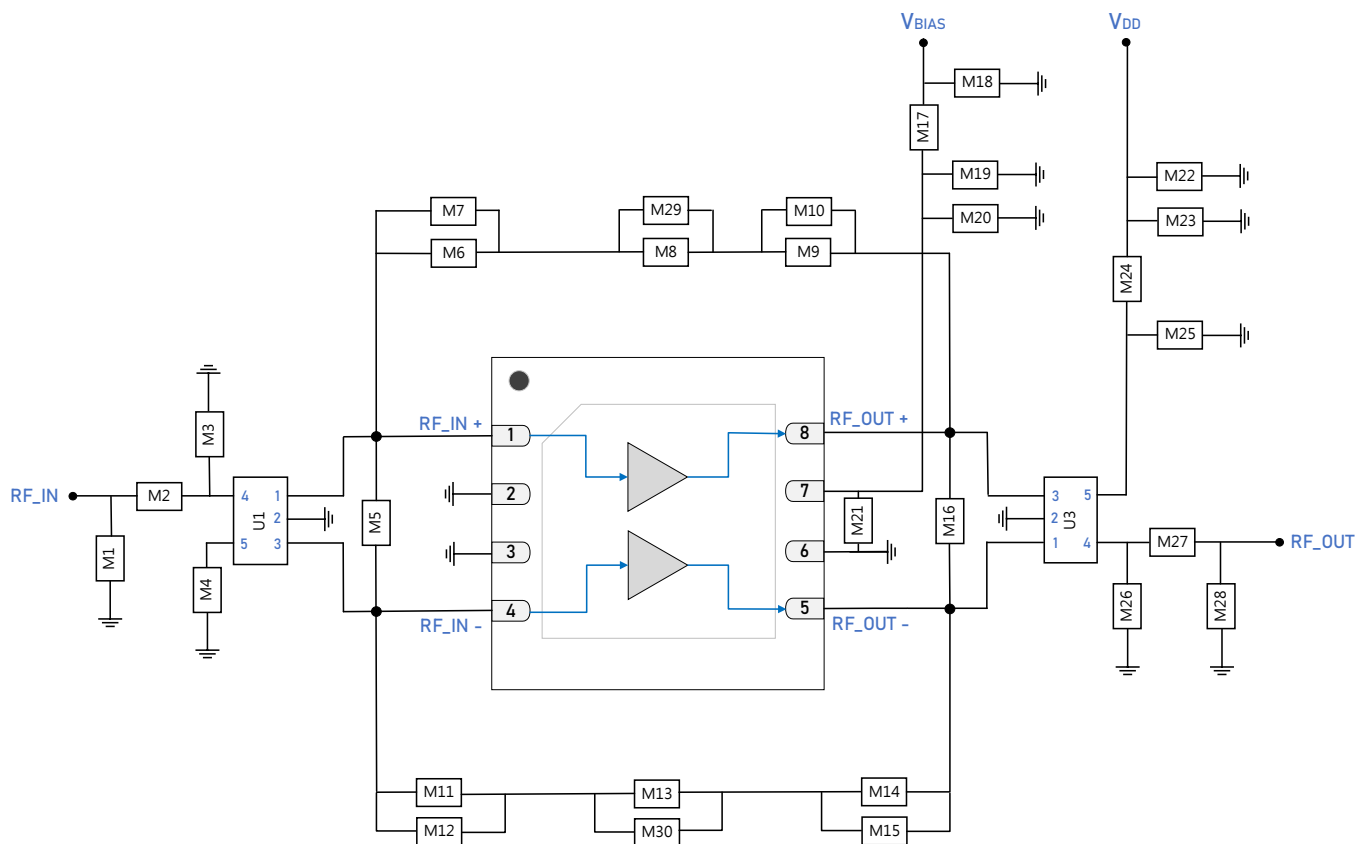

GRF9834 Standard Evaluation Board Schematic





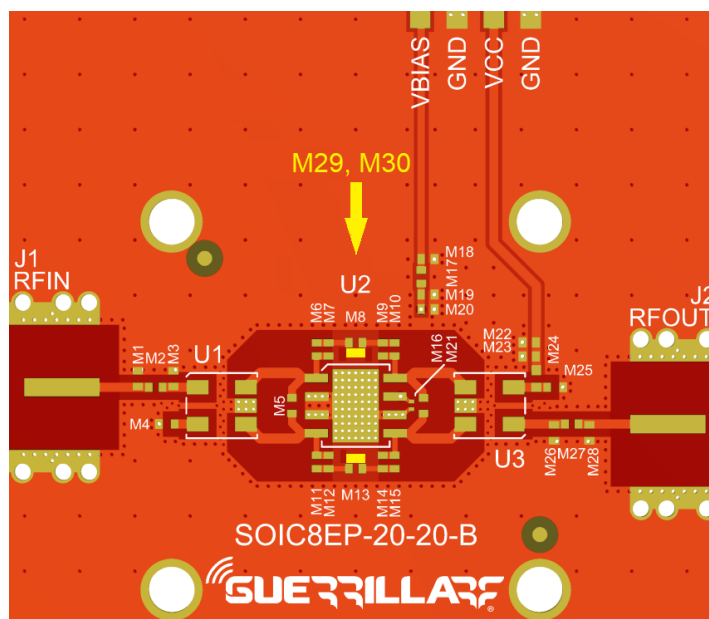


GRF9834 Evaluation Board Assembly Diagram

GRF9834 Evaluation Board Assembly Diagram Reference: 50 to 1800 MHz Tune

Component	Type	Manufacturer	Family/Part Number	Value	Package Size	Substitution
M1, M3, M7, M12, M16, M19, M20, M21, M26, M28	DNP					
M2, M4, M8, M13, M18, M22, M25, M27	Capacitor	Murata	GRM	0.1 uF	0402	ok
M6, M11	Resistor	Various	5%	232 Ω	0402	ok
M29, M30	Resistor	Various	5%	100 k Ω *	0402	ok
M10, M15	Resistor	Various	5%	25.5 Ω	0402	ok
M9, M14	Capacitor	Murata	GJM	1.2 pF	0402	ok
M5	Capacitor	Murata	GJM	0.7 pF	0402	ok
M17	Resistor	Various	5%	500 Ω	0402	ok
M23	Capacitor	Murata	GRM	1000 pF	0402	ok
M24	Ferrite	Murata	BLM15PX601SZ1	N/A	0402	no
U1, U3	Balun	MiniRF	MRFXF0837	N/A	N/A	no
Evaluation Board	SOIC8EP-20-20-B					

* Note: Evaluation board shows location of M29 and M30.

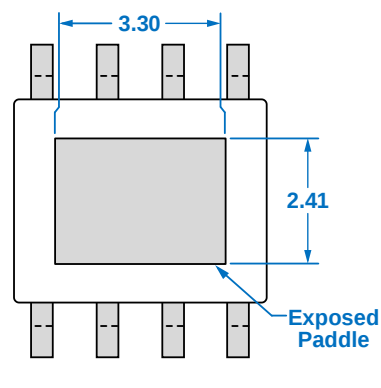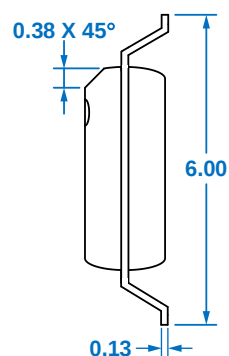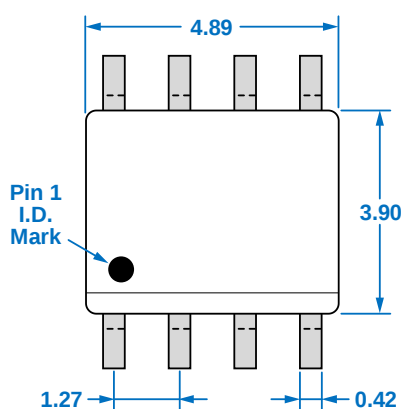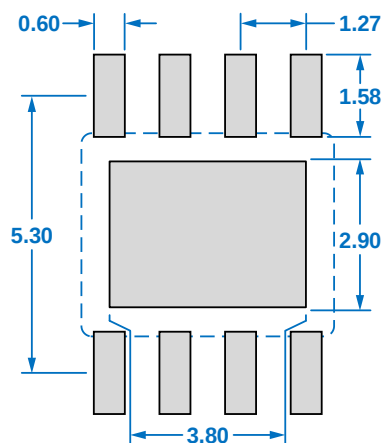
BOTTOM VIEW

SIDE VIEW

FRONT VIEW

TOP VIEW

**RECOMMENDED
LAND PATTERN**

3.9 x 4.9 mm SOIC-8 EP Footprint and Package Dimensions

Package Marking Diagram




- Line 1: "YY" = YEAR. "WW" = WORK WEEK device was assembled.
- Line 2: "XXXX" = Device PART NUMBER.

Tape and Reel Information


Guerrilla RF's tape and reel specification complies with Electronic Industries Alliance (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.

For the Tape and Reel Reference Table, please refer to: [Package Manufacturing Information | Guerrilla RF \(guerrilla-rf.com\)](https://www.guerrilla-rf.com/package-manufacturing-information)

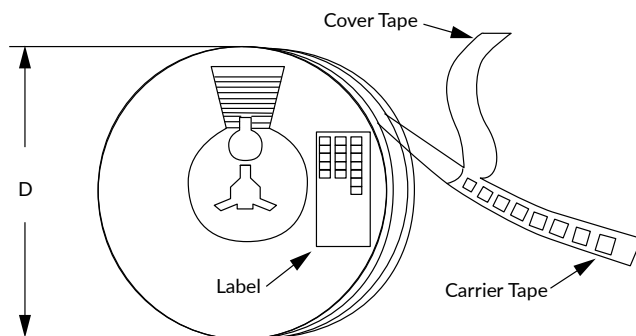

Tape and Reel Packaging with Reel Diameter Noted (D)

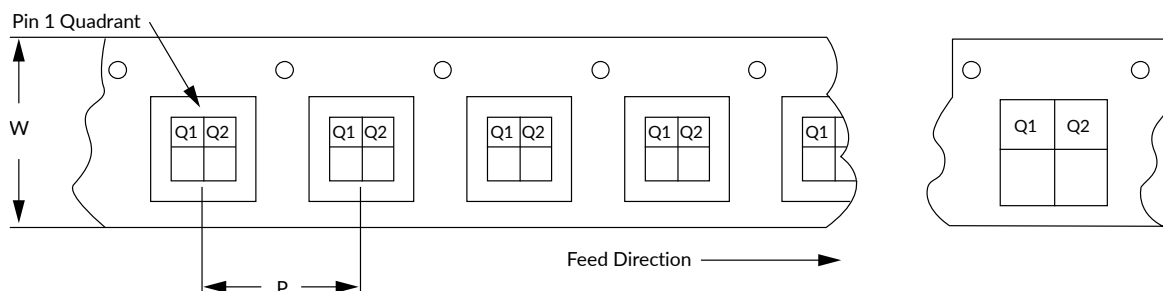

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information



Revision History

Revision Date	Description of Change
June 27, 2025	Preliminary Data Sheet.



Data Sheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this data sheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This data sheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this data sheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any data sheet, data sheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this data sheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, data sheets, and data sheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its data sheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATA SHEETS AND DATA SHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.