

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

The RF Line

NPN SILICON HIGH-FREQUENCY TRANSISTOR

- ... designed for use as low-noise, high-gain, general purpose amplifiers.
- High Current-Gain — Bandwidth Product —
 $f_T = 4.0 \text{ GHz (Typ) (at } I_C = 15 \text{ mAdc)}$
- Low Noise Figure —
 $NF = 1.5 \text{ dB (Typ) (at } f = 450 \text{ MHz)}$
 $= 2.5 \text{ dB (Typ) (at } f = 1.0 \text{ GHz)}$
- High Power Gain —
 $G_{\text{max}} = 16 \text{ dB (Typ) (at } f = 450 \text{ MHz)}$
 $= 10 \text{ dB (Typ) (at } f = 1.0 \text{ GHz)}$
- Excellent Third Order Intercept — +25 dBm (Typ)
- MIL-S-19500 Processed Versions Available as MRF904HX, MRF904HXV

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CE0}	15	Vdc
Collector-Base Voltage	V_{CBO}	25	Vdc
Emitter-Base Voltage	V_{EBO}	3.0	Vdc
Collector Current — Continuous	I_C	30	mA dc
Total Power Dissipation (at $T_A = 25^\circ\text{C}$ Derate above 25°C)	P_D	0.2 1.14	Watt mW/°C
Storage Temperature Range	T_{stg}	-65 to +200	°C

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage ($I_C = 1.0 \text{ mA dc}$, $I_B = 0$)	$V_{(BR)CEO}$	15	—	—	Vdc
Collector-Base Breakdown Voltage ($I_C = 0.1 \text{ mA dc}$, $I_E = 0$)	$V_{(BR)CBO}$	25	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = 0.1 \text{ mA dc}$, $I_C = 0$)	$V_{(BR)EBO}$	3.0	—	—	Vdc
Collector Cutoff Current ($V_{CB} = 15 \text{ Vdc}$, $I_E = 0$)	I_{CBO}	—	—	50	nA dc

ON CHARACTERISTICS

DC Current Gain ($I_C = 5.0 \text{ mA dc}$, $V_{CE} = 5.0 \text{ Vdc}$)	h_{FE}	30	—	200	—
---	----------	----	---	-----	---

DYNAMIC CHARACTERISTICS


Current-Gain — Bandwidth Product ($I_C = 15 \text{ mA dc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ GHz}$)	f_T	—	4.0	—	GHz
Collector-Base Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f = 1.0 \text{ MHz}$)	C_{cb}	—	—	1.0	pF
Noise Figure ($I_C = 5.0 \text{ mA dc}$, $V_{CE} = 6.0 \text{ Vdc}$, $f = 450 \text{ MHz}$)	NF	—	1.5	—	dB
($I_C = 5.0 \text{ mA dc}$, $V_{CE} = 6.0 \text{ Vdc}$, $f = 1.0 \text{ GHz}$)			2.5	—	

FUNCTIONAL TEST

Unilateralized Gain ⁽¹⁾ ($I_C = 5.0 \text{ mA dc}$, $V_{CE} = 6.0 \text{ Vdc}$, $f = 450 \text{ MHz}$)	G_{max}				dB
($I_C = 5.0 \text{ mA dc}$, $V_{CE} = 6.0 \text{ Vdc}$, $f = 1.0 \text{ GHz}$)		—	16	—	
		—	10	—	
⁽¹⁾ $G_{\text{max}} = \frac{ S_{21} ^2}{(1 - S_{11} ^2)(1 - S_{22} ^2)}$					

MRF904

$I_C = 30 \text{ mA}$
**HIGH FREQUENCY
TRANSISTOR**
NPN SILICON



NOTE: ALL RULES AND NOTES ASSOCIATED WITH TO 72
OUTLINE SHALL APPLY

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.31	5.84	0.209	0.230
B	4.52	4.95	0.178	0.195
C	4.32	5.33	0.170	0.210
D	0.41	0.53	0.016	0.021
E	—	0.76	—	0.030
F	0.41	0.48	0.015	0.019
G	2.54 BSC	—	0.100 BSC	—
H	0.91	1.17	0.036	0.046
J	0.71	1.27	0.028	0.049
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45 BSC	—	45 BSC	—
N	1.27 BSC	—	0.050 BSC	—
P	—	1.27	—	0.050

**CASE 20-03
TO-206AF
(TO-72)**

FIGURE 1 – NOISE FIGURE versus FREQUENCY

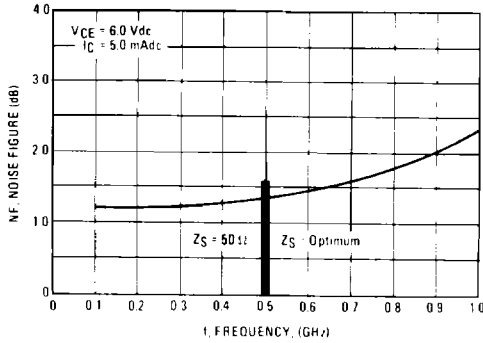


FIGURE 2 – NOISE FIGURE versus COLLECTOR CURRENT

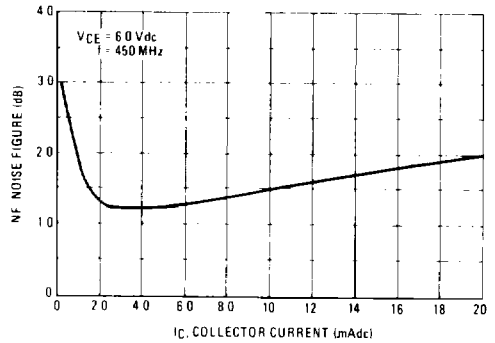


FIGURE 3 – COLLECTOR-BASE CAPACITANCE versus COLLECTOR-BASE VOLTAGE

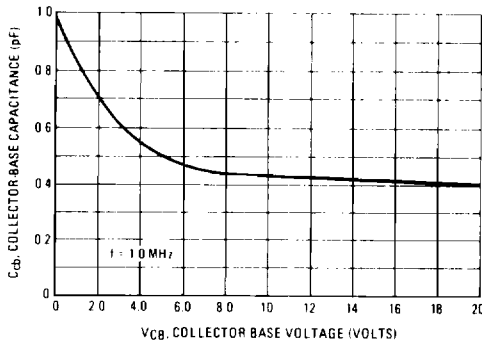


FIGURE 4 – UNILATERALIZED GAIN (G_{max}) versus FREQUENCY

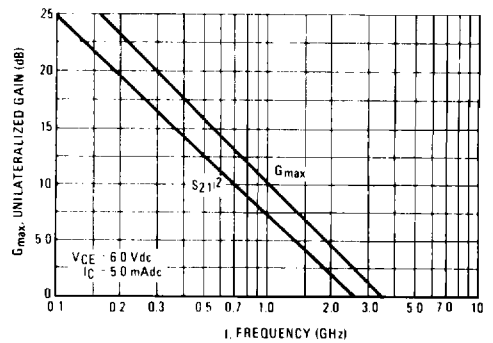


FIGURE 5 – CURRENT-GAIN – BANDWIDTH PRODUCT versus COLLECTOR CURRENT


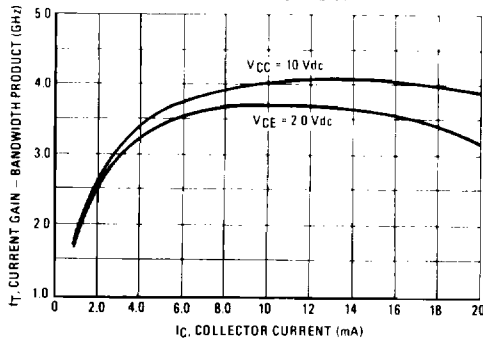


FIGURE 6 – INTERMODULATION DISTORTION versus COLLECTOR CURRENT

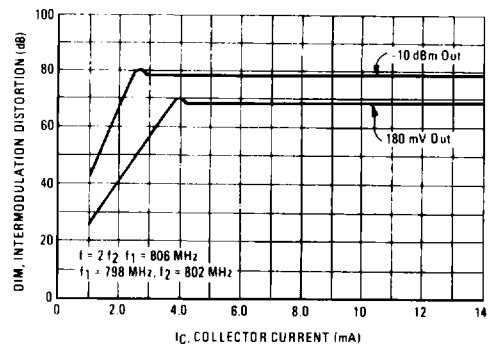

MRF904

TABLE 1 – S₁₁ PARAMETERS

Frequency (MHz)		100		200		500		800		1000	
VCC (Volts)	I _C (mA)										
1.0	1.0	0.941	-22	0.85	-43	0.57	-91	0.37	-128	0.30	-151
	2.5	0.85	-31	0.67	-57	0.35	-102	0.20	-136	0.14	-157
	5.0	0.69	-44	0.46	-71	0.21	-109	0.10	-144	0.069	-166
	10	0.45	-67	0.28	-94	0.13	-136	0.087	172	0.075	145
	15	0.37	-110	0.31	-145	0.26	170	0.27	139	0.27	122
	30	0.71	-178	0.71	169	0.68	144	0.68	121	0.65	107
3.0	1.0	0.94	-19	0.87	-37	0.61	-80	0.39	-114	0.30	-134
	2.5	0.87	-26	0.71	-47	0.39	-84	0.21	-106	0.15	-115
	5.0	0.74	-34	0.52	-55	0.25	-77	0.13	-82	0.109	-79
	10	0.55	-42	0.35	-58	0.18	-66	0.11	-60	0.105	-55
	15	0.46	-46	0.28	-59	0.15	-64	0.096	-55	0.092	-49
	30	0.28	-95	0.21	-134	0.16	175	0.17	135	0.17	116
6.0	1.0	0.95	-18	0.88	-35	0.63	-76	0.40	-108	0.30	-126
	2.5	0.89	-23	0.74	-43	0.42	-77	0.23	-94	0.17	-100
	5.0	0.77	-31	0.56	-49	0.29	-67	0.18	-69	0.15	-66
	10	0.61	-37	0.40	-50	0.23	-55	0.16	-51	0.16	-50
	15	0.52	-40	0.34	-51	0.20	-52	0.15	-47	0.15	-47
	30	0.36	-55	0.21	-70	0.098	-77	0.037	-59	0.033	-27
10	1.0	0.96	-17	0.89	-33	0.65	-73	0.41	-103	0.31	-121
	2.5	0.89	-22	0.76	-41	0.44	-73	0.25	-88	0.18	-93
	5.0	0.79	-28	0.59	-46	0.32	-63	0.20	-65	0.18	-63
	10	0.64	-34	0.44	-47	0.26	-52	0.19	-49	0.18	-49
	15	0.57	-37	0.38	-48	0.23	-49	0.18	-46	0.17	-46
	30	0.41	-51	0.24	-64	0.12	-67	0.061	-52	0.055	-36

2

TABLE 2 – S₂₁ PARAMETERS

Frequency (MHz)		100		200		500		800		1000	
VCC (Volts)	I _C (mA)										
1.0	1.0	5.32	156	3.06	137	2.22	97	1.65	70	1.44	56
	2.5	6.79	146	5.57	124	3.15	86	2.14	64	1.81	52
	5.0	10.97	133	7.60	110	3.62	79	2.38	61	2.00	49
	10	13.16	118	8.07	99	3.60	74	2.35	57	1.96	46
	15	9.84	108	5.66	91	2.44	67	1.63	49	1.38	38
	30	1.65	83	0.88	69	0.47	46	0.43	37	0.45	31
3.0	1.0	3.33	159	3.11	142	2.36	103	1.79	76	1.55	62
	2.5	6.89	150	5.85	129	3.48	92	2.38	70	2.00	58
	5.0	11.49	138	8.34	115	4.12	84	2.70	66	2.25	55
	10	15.71	125	9.82	104	4.39	79	2.85	63	2.34	53
	15	16.97	119	10.05	100	4.39	77	2.83	61	2.34	52
	30	12.66	108	7.02	92	2.98	70	1.94	54	1.61	44
6.0	1.0	3.31	160	3.10	144	2.41	106	1.83	79	1.60	65
	2.5	6.80	151	5.85	131	3.60	94	2.46	77	2.07	60
	5.0	11.44	140	8.54	117	4.28	86	2.83	68	2.33	57
	10	15.85	127	10.14	107	4.61	81	2.96	65	2.46	55
	15	17.20	122	10.47	102	4.60	79	2.96	63	2.45	54
	30	16.37	113	9.38	96	4.00	75	2.58	59	2.14	49
10	1.0	3.25	160	3.08	145	2.40	108	1.83	81	1.61	67
	2.5	6.73	152	5.85	132	3.63	96	2.50	74	2.10	62
	5.0	11.19	142	8.49	119	4.34	88	2.85	69	2.37	59
	10	15.59	129	10.16	108	4.66	82	3.00	66	2.47	56
	15	17.04	124	10.49	104	4.65	80	2.99	64	2.47	55
	30	16.18	115	9.38	98	4.03	96	2.60	60	2.14	50

MRF904

TABLE 3 – S₁₂ PARAMETERS

Frequency (MHz)											
V _{CC} (Volts)	I _C (mA)	100		200		500		800		1000	
		S ₁₂	∠ φ	S ₁₂	∠ φ	S ₁₂	∠ φ	S ₁₂	∠ φ	S ₁₂	∠ φ
1.0	1.0	0.054	73	0.097	61	0.159	41	0.184	36	0.194	37
	2.5	0.051	69	0.084	58	0.140	50	0.189	48	0.220	46
	5.0	0.046	65	0.072	60	0.137	58	0.201	53	0.239	50
	10	0.041	64	0.067	64	0.142	62	0.215	56	0.256	51
	15	0.043	61	0.070	63	0.152	62	0.230	55	0.277	50
	30	0.058	50	0.093	58	0.209	57	0.311	46	0.372	39
3.0	1.0	0.039	75	0.072	65	0.123	46	0.143	42	0.151	44
	2.5	0.037	72	0.063	62	0.110	54	0.150	53	0.174	52
	5.0	0.033	70	0.055	64	0.108	62	0.160	58	0.190	55
	10	0.030	70	0.050	68	0.109	67	0.165	61	0.199	57
	15	0.028	70	0.049	70	0.109	68	0.167	62	0.200	57
	30	0.026	68	0.046	70	0.105	69	0.165	64	0.200	61
6.0	1.0	0.032	76	0.060	66	0.106	49	0.123	45	0.131	48
	2.5	0.031	73	0.054	64	0.095	57	0.130	56	0.151	55
	5.0	0.028	71	0.048	66	0.094	64	0.139	61	0.165	58
	10	0.026	71	0.043	69	0.094	68	0.144	63	0.172	59
	15	0.024	71	0.042	71	0.093	69	0.144	64	0.172	60
	30	0.021	71	0.037	72	0.086	71	0.134	67	0.162	63
10	1.0	0.028	77	0.053	68	0.095	50	0.109	47	0.116	50
	2.5	0.027	74	0.048	65	0.085	58	0.116	57	0.134	57
	5.0	0.025	73	0.043	67	0.084	64	0.125	62	0.148	60
	10	0.023	72	0.037	69	0.084	69	0.128	64	0.153	61
	15	0.022	73	0.037	70	0.084	69	0.128	65	0.152	62
	30	0.019	72	0.033	72	0.076	72	0.119	68	0.143	66

TABLE 4 – S₂₂ PARAMETERS

Frequency (MHz)											
V _{CC} (Volts)	I _C (mA)	100		200		500		800		1000	
		S ₂₂	∠ φ	S ₂₂	∠ φ	S ₂₂	∠ φ	S ₂₂	∠ φ	S ₂₂	∠ φ
1.0	1.0	0.966	-12	0.893	-23	0.693	-41	0.612	-53	0.594	-59
	2.5	0.901	-18	0.760	-29	0.548	-42	0.498	-51	0.494	-56
	5.0	0.793	-24	0.619	-32	0.456	-39	0.429	-49	0.439	-54
	10	0.635	-29	0.486	-32	0.390	-36	0.377	-47	0.389	-53
	15	0.453	-29	0.364	-29	0.313	-34	0.309	-48	0.321	-14
	30	0.048	-78	0.035	-88	0.032	-135	0.031	-162	0.007	-167
3.0	1.0	0.976	-9.0	0.926	-18	0.770	-35	0.702	-46	0.683	-51
	2.5	0.935	-13	0.828	-23	0.648	-35	0.608	-43	0.608	-48
	5.0	0.853	-18	0.712	-25	0.577	-32	0.555	-41	0.565	-46
	10	0.758	-20	0.629	-23	0.539	-29	0.529	-39	0.544	-44
	15	0.711	-20	0.601	-22	0.533	-27	0.526	-38	0.540	-44
	30	0.631	-15	0.576	-16	0.548	-25	0.546	-38	0.558	-45
6.0	1.0	0.982	-8.0	0.939	-16	0.803	-31	0.742	42	0.734	-47
	2.5	0.947	-11	0.861	-20	0.699	-31	0.662	-40	0.660	-45
	5.0	0.882	-15	0.759	-21	0.633	-29	0.617	-31	0.627	-43
	10	0.801	-17	0.684	-20	0.607	-26	0.601	-35	0.610	-41
	15	0.769	-17	0.667	-19	0.602	-25	0.601	-35	0.607	-40
	30	0.737	-14	0.672	-15	0.640	-22	0.641	-33	0.655	-40
10	1.0	0.983	-7.0	0.949	-14	0.830	-29	0.774	-39	0.765	-40
	2.5	0.954	-10	0.880	-18	0.733	-29	0.698	-37	0.702	-42
	5.0	0.901	-13	0.793	-19	0.676	-27	0.659	-35	0.668	-41
	10	0.834	-15	0.725	-18	0.646	-24	0.646	-33	0.658	-39
	15	0.802	-15	0.706	-17	0.645	-23	0.648	-33	0.661	-39
	30	0.776	-13	0.712	-14	0.678	-22	0.686	-32	0.699	-38